



# Cylindrical Body Cylinder Accessories


**Snap Ring**




**Feeder Cap**

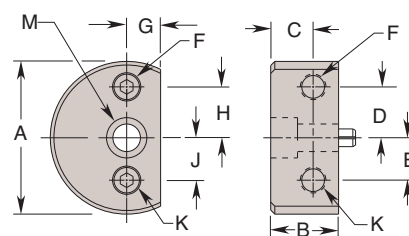

**Foot Mounting Bracket**

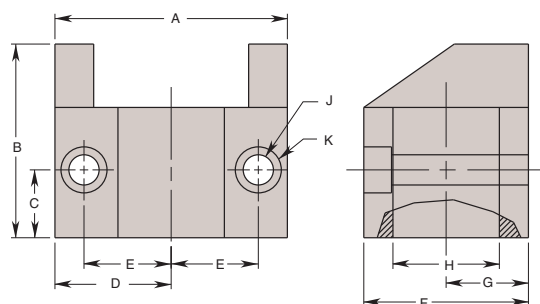

**Manifold Mounting Information**

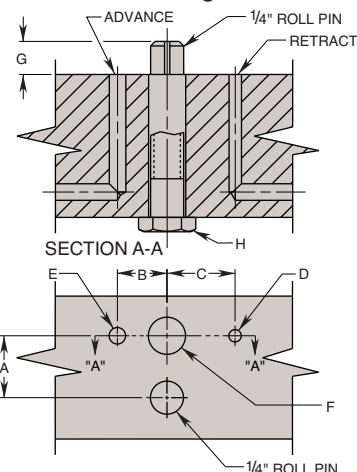

| FOOT MOUNTING BRACKET |                    |                        |       |       |       |       |       |       |        |        |        |       |
|-----------------------|--------------------|------------------------|-------|-------|-------|-------|-------|-------|--------|--------|--------|-------|
| Cat. No.              | Specifications     | Dimensions (In Inches) |       |       |       |       |       |       |        |        |        |       |
|                       | Used with Cat. No. | A                      | B     | C     | D     | E     | F     | G     | H Dia. | J Dia. | K Dia. | Depth |
| 400013                | 100043B<br>100044B | 3.000                  | 2.500 | .875  | 1.500 | 1.125 | 2.125 | 1.062 | 1.375  | .406   | .600   | .353  |
| 400015                | 100049B<br>100050B | 4.500                  | 3.000 | 1.075 | 2.250 | 1.750 | 3.000 | 1.500 | 2.250  | .547   | .812   | .562  |

NOTE: 5,000 psi max. operating pressure

| FEEDER CAPS |                        |        |       |      |      |      |                |      |      |      |                |        |
|-------------|------------------------|--------|-------|------|------|------|----------------|------|------|------|----------------|--------|
| Cat. No.    | Dimensions (In Inches) |        |       |      |      |      |                |      |      |      |                |        |
|             | Used with Cat. No.     | A Dia. | B     | C    | D    | E    | F Retract Port | G    | H    | J    | K Advance Port | M Dia. |
| 100163      | 100043B<br>100044B     | 1.438  | 1.000 | .625 | .375 | .375 | 1/8 NPTF       | .312 | .438 | .438 | 1/8 NPTF       | .281   |
| 100165      | 100049B<br>100050B     | 2.250  |       |      | .750 | .625 |                | .500 | .750 | .625 |                | .406   |

NOTE: 5,000 psi max. operating pressure. Mounting Screw included.

| *SNAP RINGS |                        |                      |      |                  |
|-------------|------------------------|----------------------|------|------------------|
| Cat. No.    | Dimensions (In Inches) |                      |      |                  |
|             | Used With Cat. No.     | A Nominal Shaft Dia. | B    | C Clearance Dia. |
| 300084      | 100043B<br>100044B     | 1.375                | .050 | 1.800            |
| 300086      | 100049B<br>100050B     | 2.250                | .078 | 3.180            |

NOTE: \* Two each included with each cylinder.

| MANIFOLD MOUNTING INFORMATION |      |      |      |        |        |        |      |                  |
|-------------------------------|------|------|------|--------|--------|--------|------|------------------|
| Dimensions (In Inches)        |      |      |      |        |        |        |      |                  |
| Used with Cat. No.            | A    | B    | C    | D Dia. | E Dia. | F Dia. | G    | H Mounting Screw |
| 100043B<br>100044B            | .468 | .375 | .515 | .094   | .125   | .281   | .250 | †1/4-20 UNC      |
| 100049B<br>100050B            | .812 | .531 | .906 |        | .250   | .406   |      | ††3/8-16 UNC     |

NOTE: † .312 min. cylinder thread depth.  
†† .437 min. cylinder thread depth.