

BALDOR® • RELIANCE

Product Information Packet

EL3506

.75HP,3450RPM,1PH,60HZ,56,3424LC,TEFC,F1

Part Detail							
Revision:	J	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3424LC	Elec. Spec:	34WGS432	CD Diagram:	CD0055
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	34G375	Layout:	34LYG375
Frame:	56	Mounting:	F1	Poles:	02	Created Date:	11-10-2008
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	05-25-2016
Leads:	6#18					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP2116L

CAT.NO.	EL3506									
SPEC.	34G375S432G1									
HP	.75									
VOLTS	115/230									
AMP	7.8/3.9									
RPM	3450									
FRAME	56						HZ	60		
SER.F.	1.25						CODE	K		
NEMA-NOM-EFF	72						DES	N		
							CL	B		
							PF	86		
RATING	40C AMB-CONT									
CC										
							USABLE AT 208V			
DE	6203						ODE	6203		
ENCL	TEFC						SN			
	SFA 9.2/4.6									

Parts List		
Part Number	Description	Quantity
SA177265	SA 34G375S432G1	1.000 EA
RA165308	RA 34G375S432G1	1.000 EA
OC3030F11SP	CYL OIL CAP 30MFD/370V	1.000 EA
EC1400A03	ELEC CAP, 400-480 MFD, 125V, 1.81D X 3.	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 EA
34GS1029A01	GASKET, CONDUIT BOX	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	3.000 EA
34EP3102A01SP	FR ENDPLATE, MACH	1.000 EA
34CB3801	CAPACITOR BOX, DIE CAST	1.000 EA
34GS3002	GASKET, CAPACITOR BOX	1.000 EA
51XB1214A08	12-14 X 1/2HX WS SL SR TYBX	2.000 EA
HW5100A03	WAVY WASHER (W1543-017)	1.000 EA
34EP3102A02SP	FR/PU ENDPLATE, MACH	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
34FN3002A01SP	EXTERNAL FAN, PLASTIC, .637/.639 HUB W/	1.000 EA
34FH4002A01	IEC FH NO GREASER PRIMED	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 EA
34GS1031A01	GASKET, FLAT CONDUIT BOX LID (LEXIDE)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
34GS5003A01	FOAM SLEEVE, ID = 2 1/16" X 4 3/8"	1.000 EA
10XF0440S02	04-40 X 1/8 TYPE F HEX HD STAINLESS STIC	2.000 EA
SP5051B11	MODEL 34/35 TYPE LC STATIONARY SWITCH	1.000 EA
HA3100A44	THRUBOLT 10-32 X 8.000	4.000 EA
MG1000Y03	MUNSELL 2.53Y 6.70/ 4.60, GLOSS 20,	0.014 GA
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 11/14	1.000 EA
LC0001A01	CONN LABEL / WARNING LABEL (LC0001 / LB1	1.000 EA
NP2116L	ALUM SUPER-E UL CSA CC	1.000 EA
35PA1000	PKG GRP, PRINT PK1008A06	1.000 EA

AC Induction Motor Performance Data
Record # 36358 - Preliminary Data Sheet


Winding: 34WGS432-R001	Type: 3424LC	Enclosure: TEFC
-------------------------------	---------------------	------------------------


Nameplate Data				115 V, 60 Hz: Low Voltage Connection	
Rated Output (HP)	.75			Full Load Torque	1.15 LB-FT
Volts	115/230			Start Configuration	direct on line
Full Load Amps	7.8/3.9			Breakdown Torque	3.77 LB-FT
R.P.M.	3450			Pull-up Torque	2.87 LB-FT
Hz	60	Phase	1	Locked-rotor Torque	3.94 LB-FT
NEMA Design Code	N	KVA Code	K	Starting Current	57.5 A
Service Factor (S.F.)	1.25			No-load Current	4.01 A
NEMA Nom. Eff.	72	Power Factor	86	Line-line Res. @ 25°C	0.612 Ω A Ph 2.38 Ω B Ph
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	60°C
S.F. Amps	9.2/4.6			Temp. Rise @ S.F. Load	70°C

Load Characteristics 115 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	72	81	86	89	89	89
Efficiency	50.1	64.9	70.4	73.1	73	71.3	73
Speed	3565	3540	3508	3475	3435	3383	3435
Line amperes	4.49	5.34	6.5	7.84	9.31	11.3	9.31

Performance Graph at 115V, 60Hz, 0.75HP Typical performance - Not guaranteed values

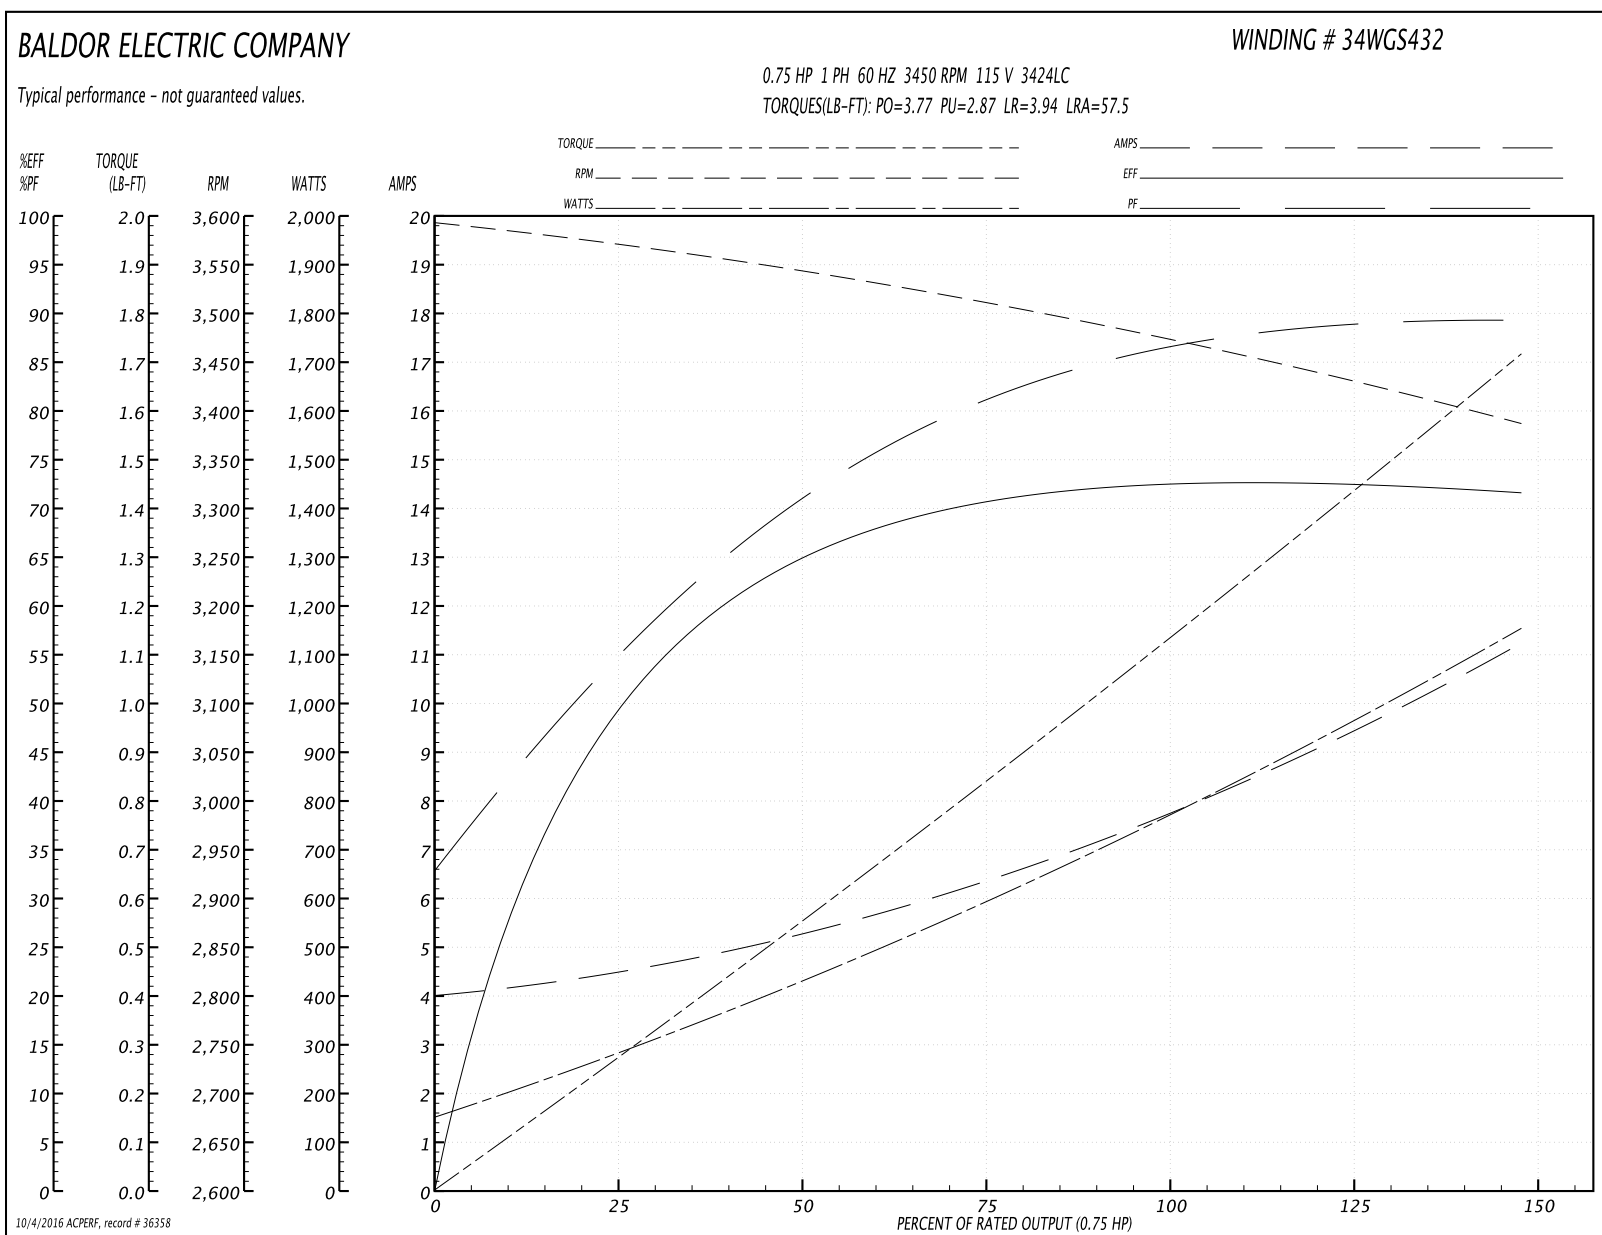

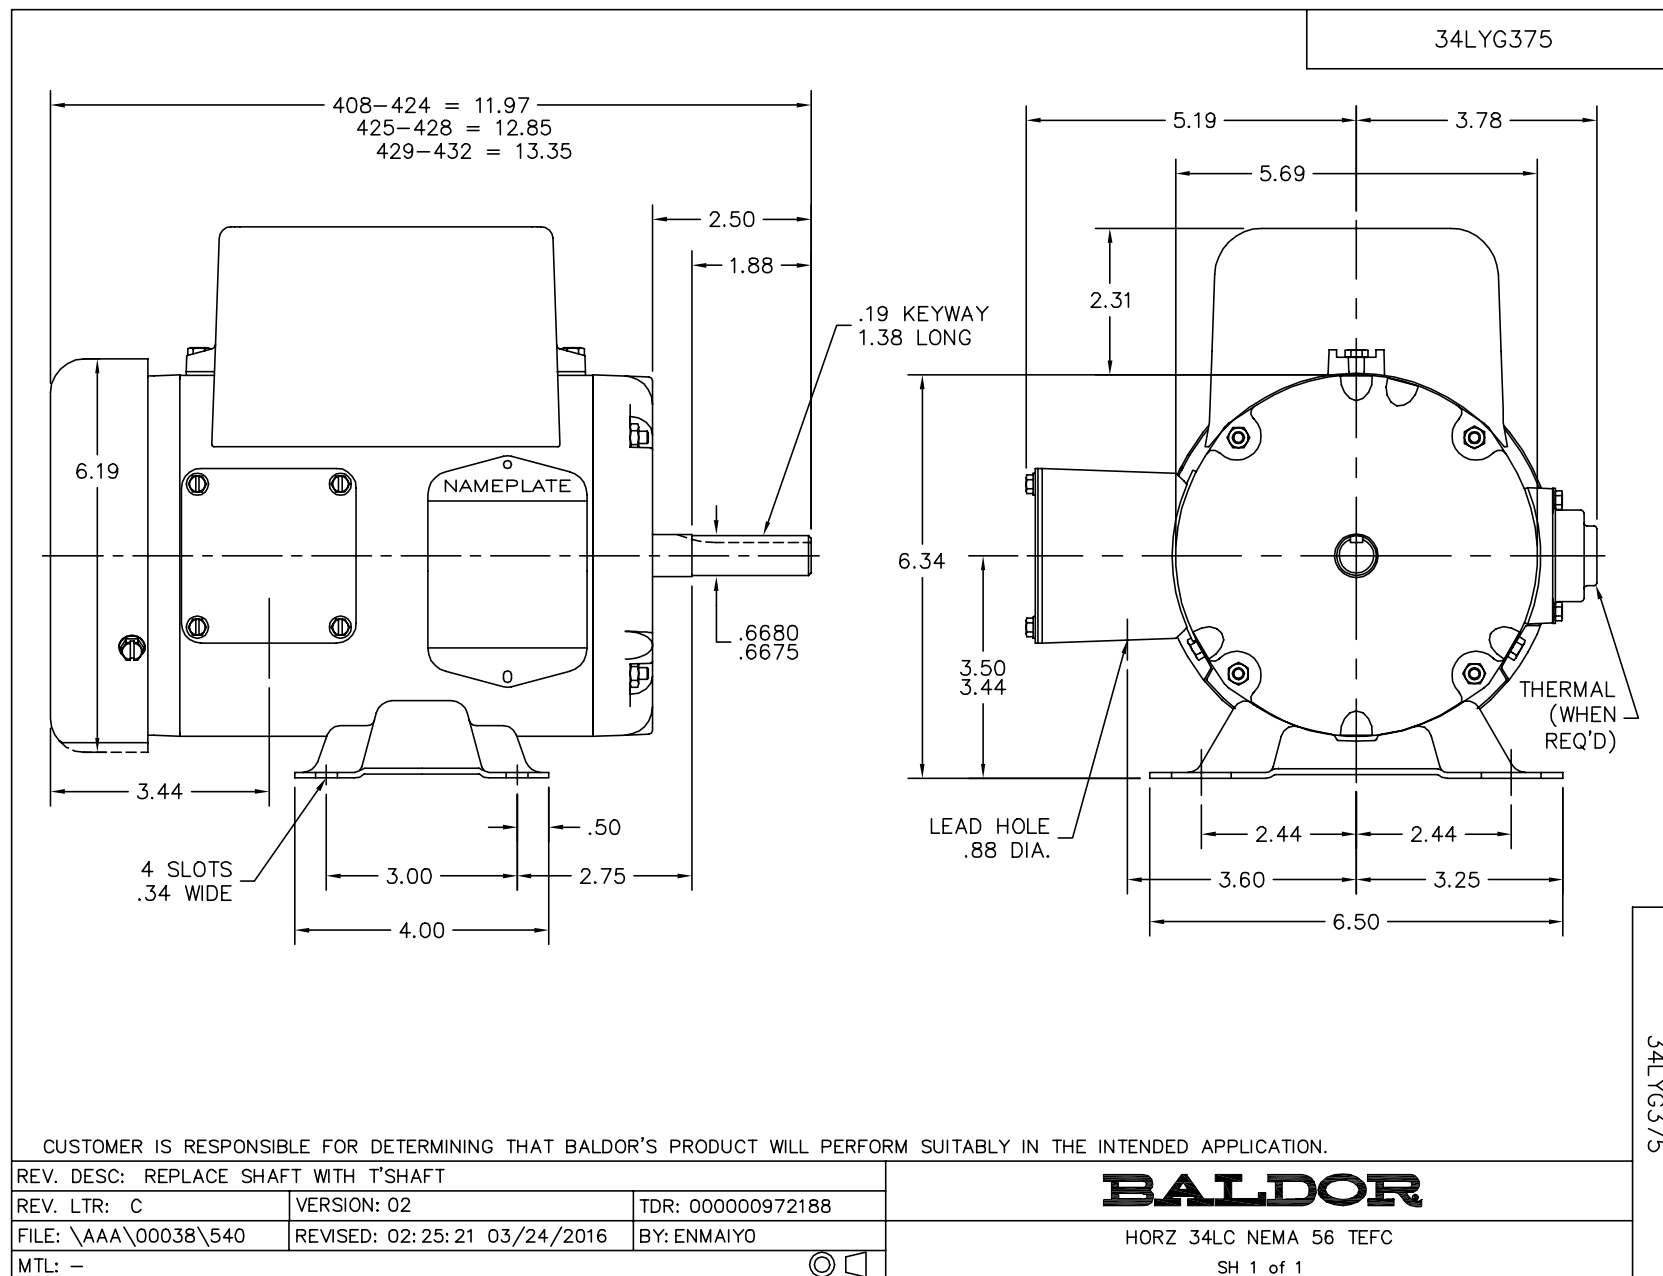

CD0055

