

BALDOR® • RELIANCE

Product Information Packet

CM3538-8

.5HP,1725RPM,3PH,60HZ,56C,3416M,TEFC,F1

Part Detail							
Revision:	C	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3416M	Elec. Spec:	34WG0918	CD Diagram:	CD0006
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	34A062	Layout:	34LYA062
Frame:	56C	Mounting:	F1	Poles:	04	Created Date:	11-14-2007
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	05-31-2016
Leads:	3#18					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1256L

CAT.NO.	CM3538-8											
SPEC.	34A062-0918											
HP	.5											
VOLTS	200											
AMP	2.2											
RPM	1725											
FRAME	56C				HZ		60		PH	3		
SER.F.	1.25			CODE	L	DES	B	CLASS	B			
NEMA-NOM-EFF	74			PF	63							
RATING	40C AMB-CONT											
CC				USABLE AT 208V								
DE	6203			ODE	6203							
ENCL	TEFC			SN								
	SFA 2.6											

Parts List		
Part Number	Description	Quantity
SA166344	SA 34A062-0918	1.000 EA
RA154724	RA 34A062-0918	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 EA
34GS1029A01	GASKET, CONDUIT BOX	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
34EP3102A01SP	FR ENDPLATE, MACH	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
34EP3300A24SP	PU ENDPLATE, MACH	1.000 EA
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 EA
34FN3002A01SP	EXTERNAL FAN, PLASTIC, .637/.639 HUB W/	1.000 EA
34FH4002A01SP	IEC FH NO GREASER PRIMED	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 EA
34GS1031A01	GASKET, FLAT CONDUIT BOX LID (LEXIDE)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
MG1000G27	MED CHARCOAL METALLIC GREY 400-0096	0.014 GA
10XF0440S02	04-40 X 1/8 TYPE F HEX HD STAINLESS STIC	2.000 EA
HA3100A12	THRUBOLT 10-32 X 7.375	4.000 EA
LB1119N	WARNING LABEL	1.000 EA
LC0006	CONNECTION LABEL	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
NP1256L	ALUM UL CSA CC	1.000 EA
34PA1002	PKG GRP, PRINT PK1001A01	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1000/bx) 11/14	1.000 EA

AC Induction Motor Performance Data

Record # 6622 - Typical performance - not guaranteed values

Winding: 34WG0918-R001	Type: 3416M	Enclosure: TEFC
-------------------------------	--------------------	------------------------




Nameplate Data				200 V, 60 Hz: Single Voltage Motor	
Rated Output (HP)	.5			Full Load Torque	1.5 LB-FT
Volts	200			Start Configuration	direct on line
Full Load Amps	2.2			Breakdown Torque	6.1 LB-FT
R.P.M.	1725			Pull-up Torque	3.9 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	4.6 LB-FT
NEMA Design Code	B	KVA Code	L	Starting Current	13.4 A
Service Factor (S.F.)	1.25			No-load Current	1.7 A
NEMA Nom. Eff.	74	Power Factor	63	Line-line Res. @ 25°C	7.49 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	65°C
S.F. Amps	2.6			Temp. Rise @ S.F. Load	77°C
				Locked-rotor Power Factor	68
				Rotor inertia	0.0381 LB-FT ²

Load Characteristics 200 V, 60 Hz, 0.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	31	46	57	68	74	79	74
Efficiency	54.9	67.7	73.4	75	75.2	74.5	75.2
Speed	1781	1767	1751	1734	1718	1697	1718
Line amperes	1.7	1.8	1.9	2.2	2.4	2.6	2.4



CD0006

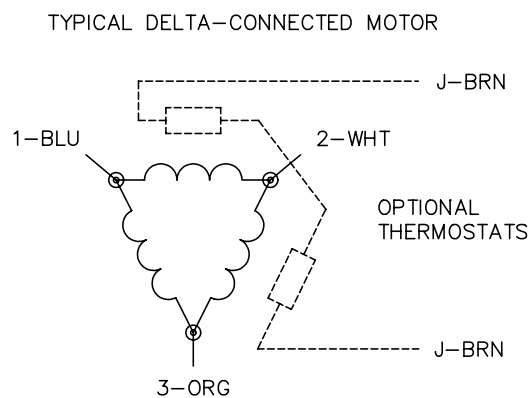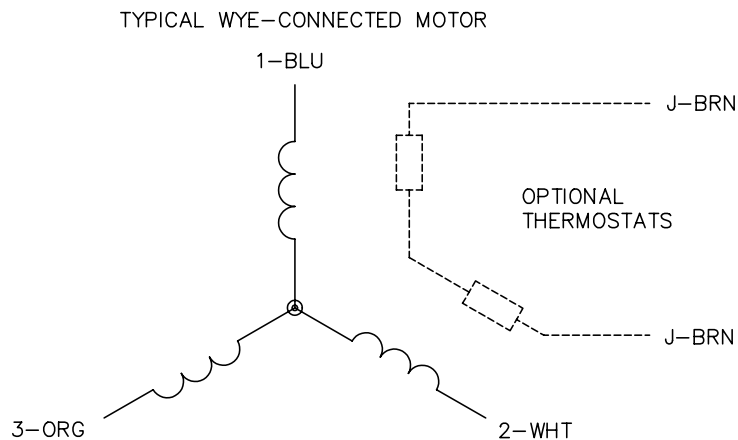

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: D

BY: JLP

REVISED: 01/21/99 4:02

TDR: 0171435

90000D

FILE: AAA00005141

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

CD0006