

BALDOR® • RELIANCE

Product Information Packet

VNM3541

.75HP,3480RPM,3PH,60HZ,56C,3520M,TENV,F1

Part Detail							
Revision:	Q	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3520M	Elec. Spec:	35WGR090	CD Diagram:	CD0005
Enclosure:	TENV	Mfg Plant:		Mech. Spec:	35E010	Layout:	35LYE010
Frame:	56C	Mounting:	F1	Poles:	02	Created Date:	01-08-2008
Base:	N	Rotation:	R	Insulation:	H	Eff. Date:	09-14-2016
Leads:	9#18					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1256L

CAT.NO.	VNM3541														
SPEC.	35E010R090G2														
HP	.75														
VOLTS	208-230/460														
AMP	2.2-2/1														
RPM	3480														
FRAME	56C					HZ		60					PH	3	
SER.F.	1.25			CODE		N	DES			B	CLASS			H	
NEMA-NOM-EFF	84				PF		82								
RATING	40C AMB-CONT														
CC					USABLE AT 208V									2.2	
DE	6205					ODE		6203							
ENCL	TENV			SN											
	SFA 2.6-2.4/1.2														

Parts List		
Part Number	Description	Quantity
SA166778	SA 35E010R090G2	1.000 EA
RA155140	RA 35E010R090G2	1.000 EA
S/P111-000-002	CORONA TEST, SUPER E MOTORS - FT. SMITH	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB3007	35 CB CASTING W/.88 DIA. LEAD HOLE	1.000 EA
36GS1000	GASKET-CONDUIT BOX, .06 THICK #SV-330 LE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
35EP3100M69	STD FR EP-TENV-35L OR M--203 BRG	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
35EP3300A33	SPL FACE MTD EP -ENCL-205 BRG	1.000 EA
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 EA
35CB4521	35 LIPPED CB LID (GALV & PHOSPH)	1.000 EA
35GS1030	35 GS FOR CB LID - LEXIDE	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 EA
MG1000G27	MED CHARCOAL METALLIC GREY 400-0096	0.017 GA
HA3100A12	THRUBOLT 10-32 X 7.375	4.000 EA
LC0005E01	CONN.DIA./WARNING LABEL (LC0005/LB1119N)	1.000 EA
NP1256L	ALUM UL CSA CC	1.000 EA
35PA1066	PKG GRP, PRINT PK1008A06	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
PK3082	STYROFOAM CRADLE	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1000/bx) 11/14	1.000 EA

AC Induction Motor Performance Data

Record # 37297 - Typical performance - not guaranteed values

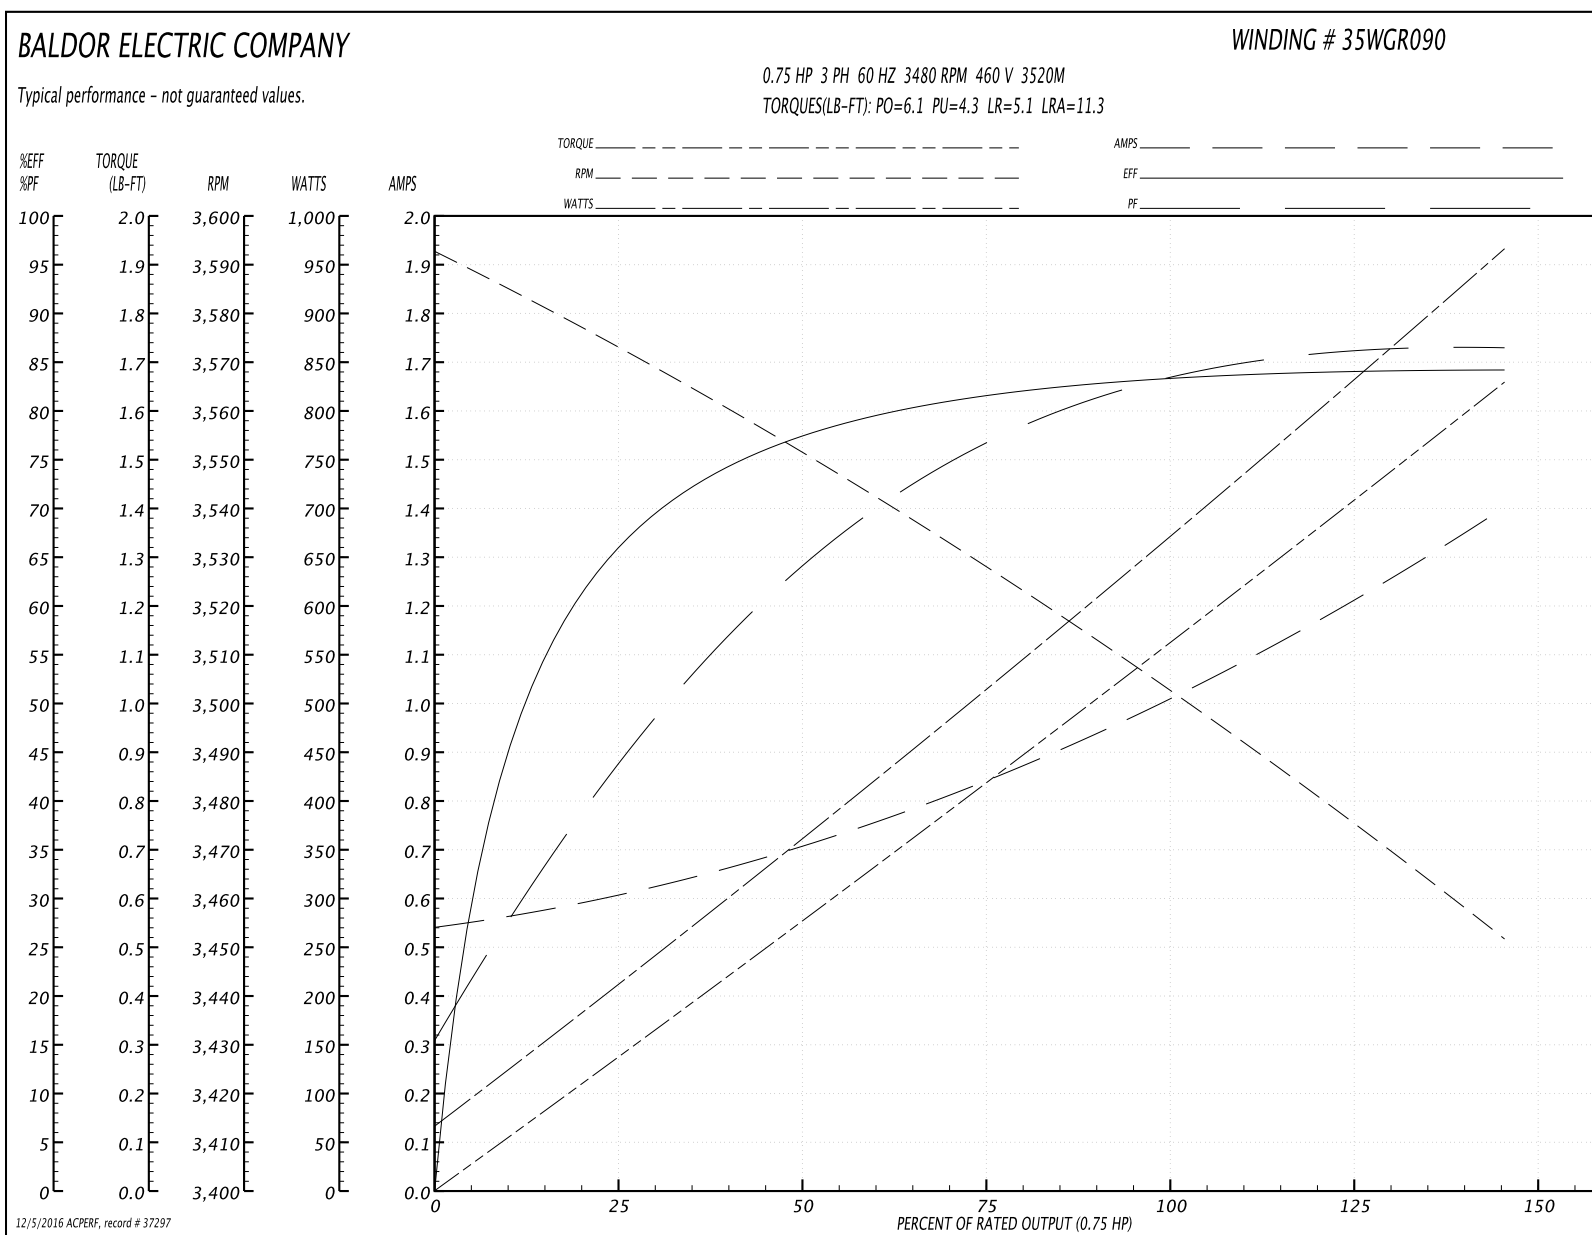
Winding: 35WGR090-R016	Type: 3520M	Enclosure: TENV
-------------------------------	--------------------	------------------------

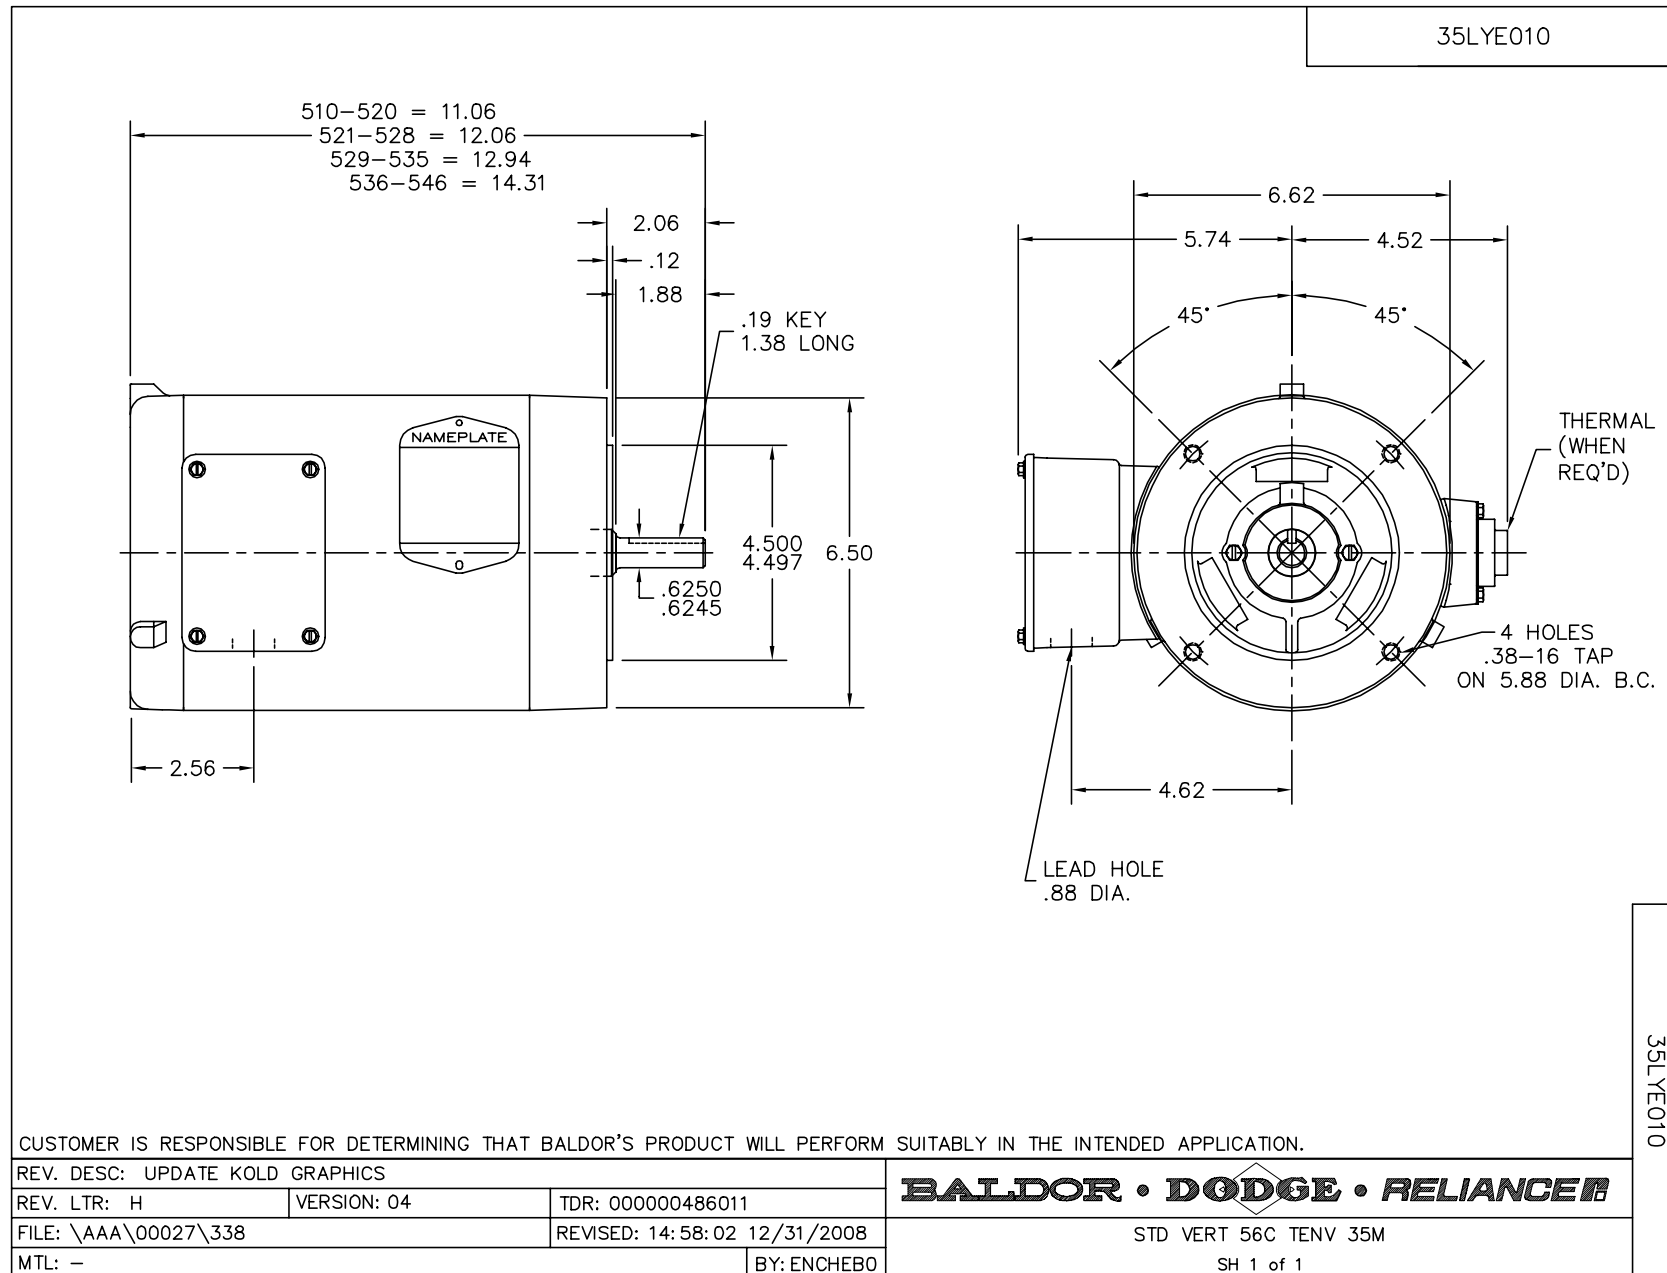
Nameplate Data				460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	.75			Full Load Torque	1.12 LB-FT
Volts	208-230/460			Start Configuration	direct on line
Full Load Amps	2.2-2/1			Breakdown Torque	6.1 LB-FT
R.P.M.	3480			Pull-up Torque	4.3 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	5.1 LB-FT
NEMA Design Code	B	KVA Code	N	Starting Current	11.3 A
Service Factor (S.F.)	1.25			No-load Current	0.545 A
NEMA Nom. Eff.	84	Power Factor	82	Line-line Res. @ 25°C	15.4 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	52°C
S.F. Amps	2.6-2.4/1.2			Temp. Rise @ S.F. Load	63°C
				Locked-rotor Power Factor	53
				Rotor inertia	0.0553 LB-FT ²

Load Characteristics 460 V, 60 Hz, 0.75 HP

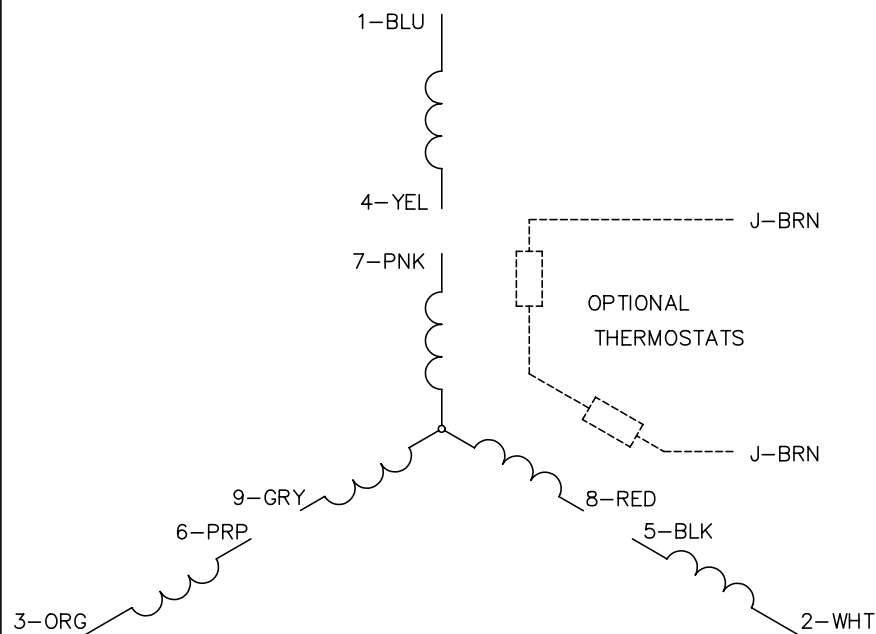

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	45	65	77	82	87	86	87
Efficiency	65	77.1	81.7	83.6	84.5	83.9	84.5
Speed	3573	3550	3528	3503	3478	3451	3478
Line amperes	0.599	0.71	0.848	1.02	1.18	1.41	1.18

Performance Graph at 460V, 60Hz, 0.75HP Typical performance - Not guaranteed values






CD0005

LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

900000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005