

BALDOR® • RELIANCE

Product Information Packet

EM30008

.33HP,1140RPM,3PH,60HZ,48,3421M,OPEN,F1

Part Detail							
Revision:	B	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3421M	Elec. Spec:	34WGR139	CD Diagram:	CD0005
Enclosure:	OPEN	Mfg Plant:		Mech. Spec:	34F002	Layout:	34LYF002
Frame:	48	Mounting:	F1	Poles:	06	Created Date:	10-03-2014
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	05-25-2016
Leads:	9#18					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP3155L

CAT.NO.	EM30008										
SPEC.	34F002R139G1										
HP	.33										
VOLTS	230/460										
AMP	1.9/.9										
RPM	1140										
FRAME	48				HZ	60				PH	3
SER.F.	1.35			CODE	M	DES	B	CL	B		
F.L. AVG. EFF.	71.4			PF	51						
RATING	40C AMB-CONT										
CC				USABLE AT 208V							
DE	6203				ODE	6203					
ENCL	OPEN			SN							
	SFA 2/1										

Parts List		
Part Number	Description	Quantity
SA287916	SA 34F002R139G1	1.000 EA
RA274119	RA 34F002R139G1	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
34EP3210A01SP	FR ENDPLATE, MACH	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
34EP3212A02	PU ENDPLATE, MODEL 34 OPEN	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
MG1000Y03	MUNSELL 2.53Y 6.70/ 4.60, GLOSS 20,	0.014 GA
10XF0440S02	04-40 X 1/8 TYPE F HEX HD STAINLESS STIC	2.000 EA
HA3100A44	THRUBOLT 10-32 X 8.000	4.000 EA
LC0005E01	CONN.DIA./WARNING LABEL (LC0005/LB1119N)	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1000/bx) 11/14	1.000 EA
NP3155L	ALUM SUPER-E UL CSA CC "SEMS"	1.000 EA
34PA1002	PKG GRP, PRINT PK1001A01	1.000 EA

AC Induction Motor Performance Data

Record # 47463 - Typical performance - not guaranteed values


Winding: 34WGR139-R002	Type: 3421M	Enclosure: OPEN
-------------------------------	--------------------	------------------------

Nameplate Data				460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	.33			Full Load Torque	1.55 LB-FT
Volts	230/460			Start Configuration	direct on line
Full Load Amps	1.9/9			Breakdown Torque	6.67 LB-FT
R.P.M.	1140			Pull-up Torque	4.76 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	6.04 LB-FT
NEMA Design Code	B	KVA Code	M	Starting Current	4.63 A
Service Factor (S.F.)	1.35			No-load Current	0.717 A
NEMA Nom. Eff.	71.4	Power Factor	51	Line-line Res. @ 25°C	39.9 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	38°C
S.F. Amps	2/1			Temp. Rise @ S.F. Load	46°C
				Locked-rotor Power Factor	61
				Rotor inertia	0.0499 LB-FT ²

Load Characteristics 460 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	22	33	43	51	58	64	60
Efficiency	49.7	64.3	69.7	72.5	72.8	72.9	72.8
Speed	1189	1179	1168	1156	1142	1128	1136
Line amperes	0.733	0.758	0.806	0.864	0.925	1.01	0.959

Performance Graph at 460V, 60Hz, 0.33HP Typical performance - Not guaranteed values

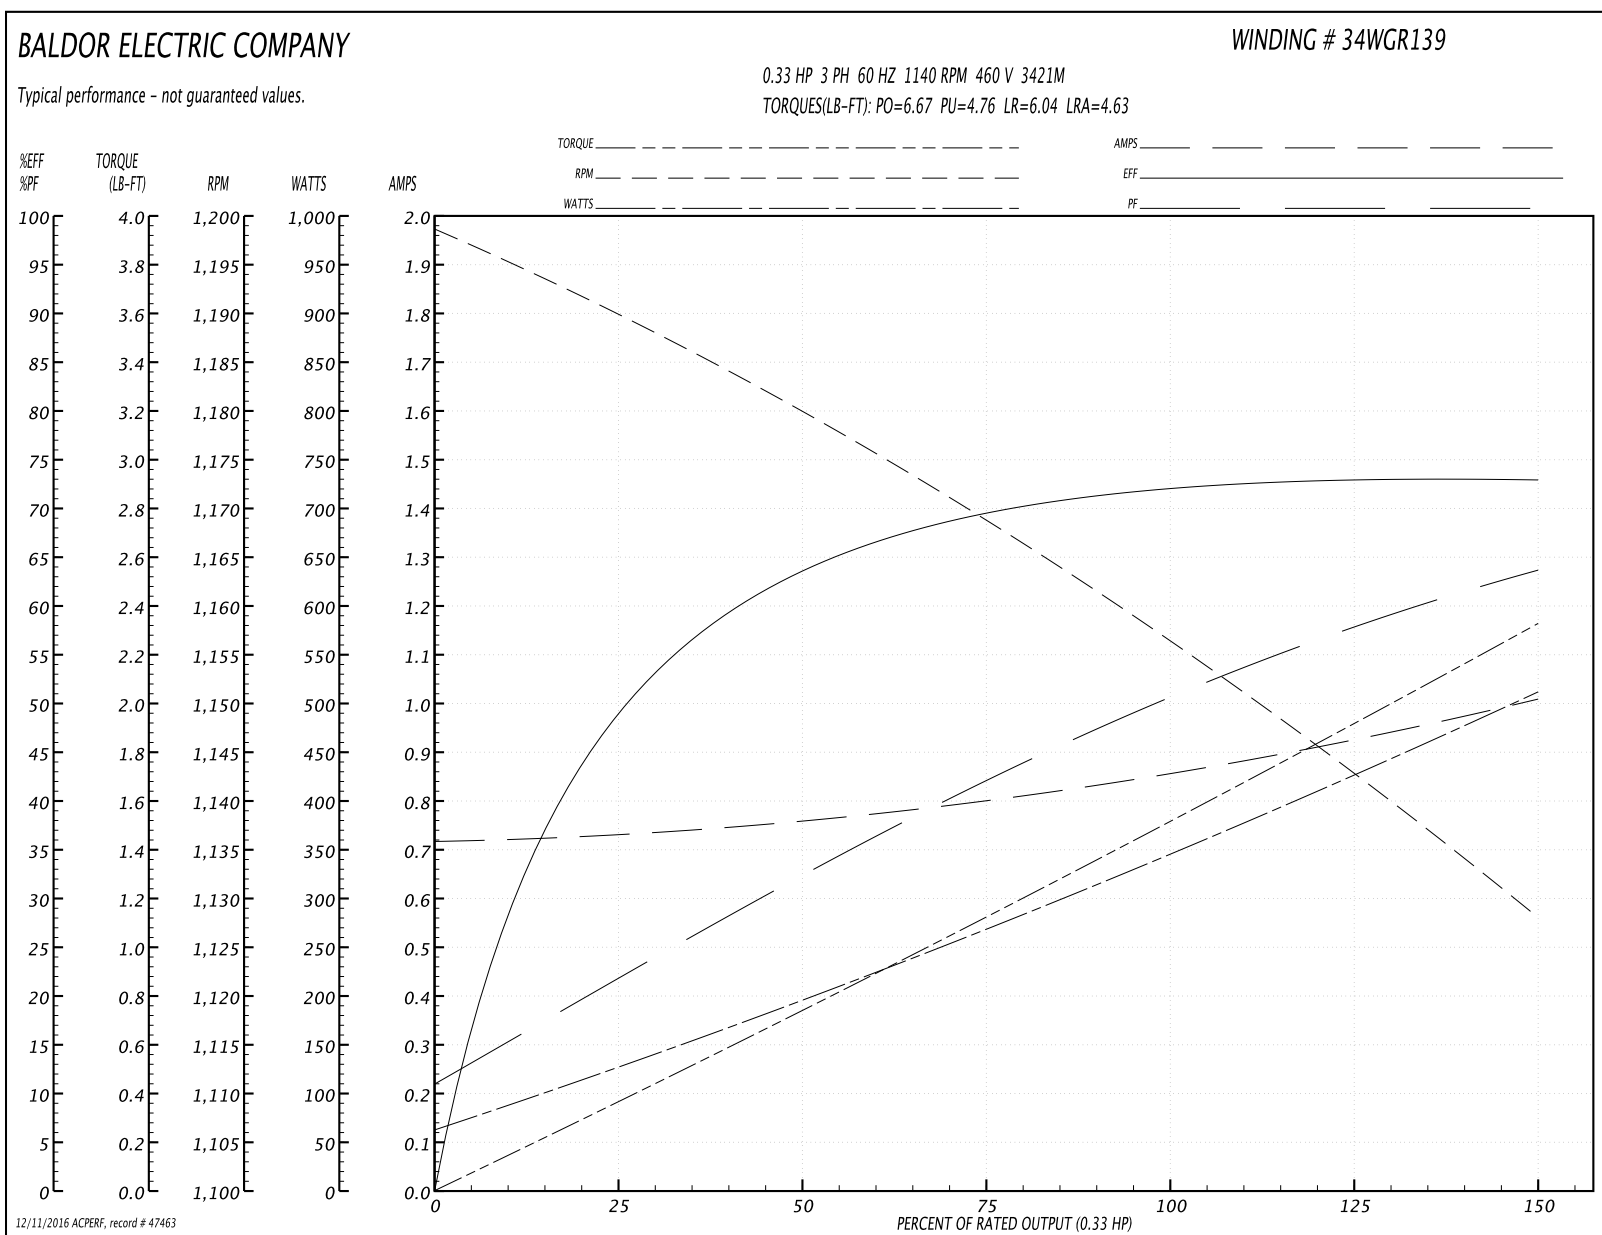

12/11/2016 ACPERF, record # 47463

