

BALDOR® • RELIANCE

Product Information Packet

VEM31153

.75HP,1160RPM,3PH,60HZ,56C,3524M,OPEN,F1

Part Detail							
Revision:	D	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3524M	Elec. Spec:	35WGN724	CD Diagram:	CD0005
Enclosure:	OPEN	Mfg Plant:		Mech. Spec:	35E4017	Layout:	35LYE4017
Frame:	56C	Mounting:	F1	Poles:	06	Created Date:	10-23-2014
Base:	N	Rotation:	R	Insulation:	F	Eff. Date:	12-07-2016
Leads:	9#18					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP3155L

CAT.NO.	VEM31153														
SPEC.	35E4017N724G1														
HP	.75														
VOLTS	230/460														
AMP	2.6/1.3														
RPM	1160														
FRAME	56C					HZ		60					PH	3	
SER.F.	1.15					CODE	K	DES		B			CL	F	
F.L. AVG. EFF.	81.7						PF	65							
RATING	40C AMB-CONT														
CC				USABLE AT 208V										2.8	
DE	6205					ODE		6203							
ENCL	OPEN			SN											

Parts List		
Part Number	Description	Quantity
SA288975	SA 35E4017N724G1	1.000 EA
RA275156	RA 35E4017N724G1	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB3007	35 CB CASTING W/.88 DIA. LEAD HOLE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
35EP3201A16	FR ENDPLATE, MACH	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 EA
35EP3400A13	STD FACE MTD END PLATE OPEN NEMA 56C 05	1.000 EA
35AD2000	AIR BAFFLE	1.000 EA
60XW0632A06	6-32 X 3/8 TORX HEAD SCREW TAPTITE II	4.000 EA
35FH4006A01SP	DRIP COVER,STAMPED,W/ PRIMER	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
35CB4521	35 LIPPED CB LID (GALV & PHOSPH)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
MG1000Y03	MUNSELL 2.53Y 6.70/ 4.60, GLOSS 20,	0.017 GA
HA3100A15	THRUBOLT 10-32 X 8.375	4.000 EA
LC0005E01	CONN.DIA./WARNING LABEL (LC0005/LB1119N)	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1000/bx) 11/14	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
NP3155L	ALUM SUPER-E UL CSA CC "SEMS"	1.000 EA
PK3082	STYROFOAM CRADLE	1.000 EA
35PA1066	PKG GRP, PRINT PK1008A06	1.000 EA

AC Induction Motor Performance Data

Record # 57233 - Typical performance - not guaranteed values

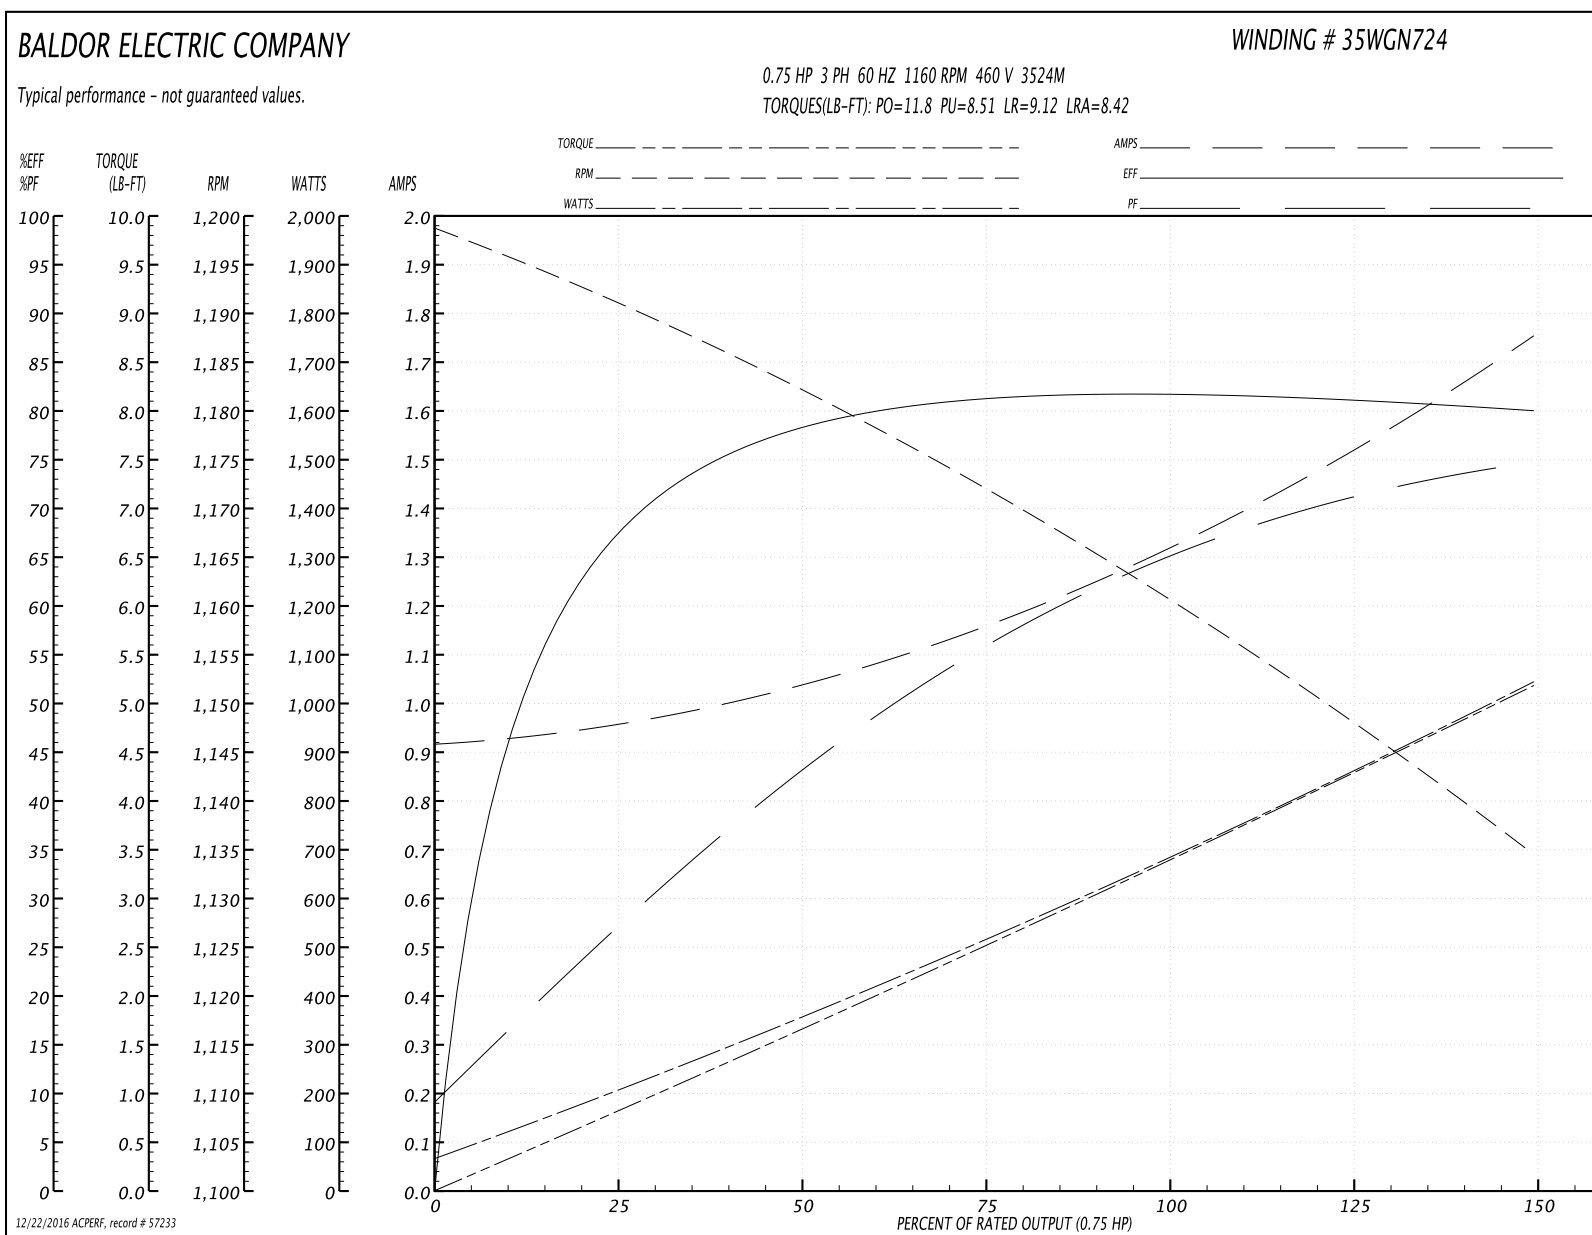
Winding: 35WGN724-R003	Type: 3524M	Enclosure: OPEN
-------------------------------	--------------------	------------------------

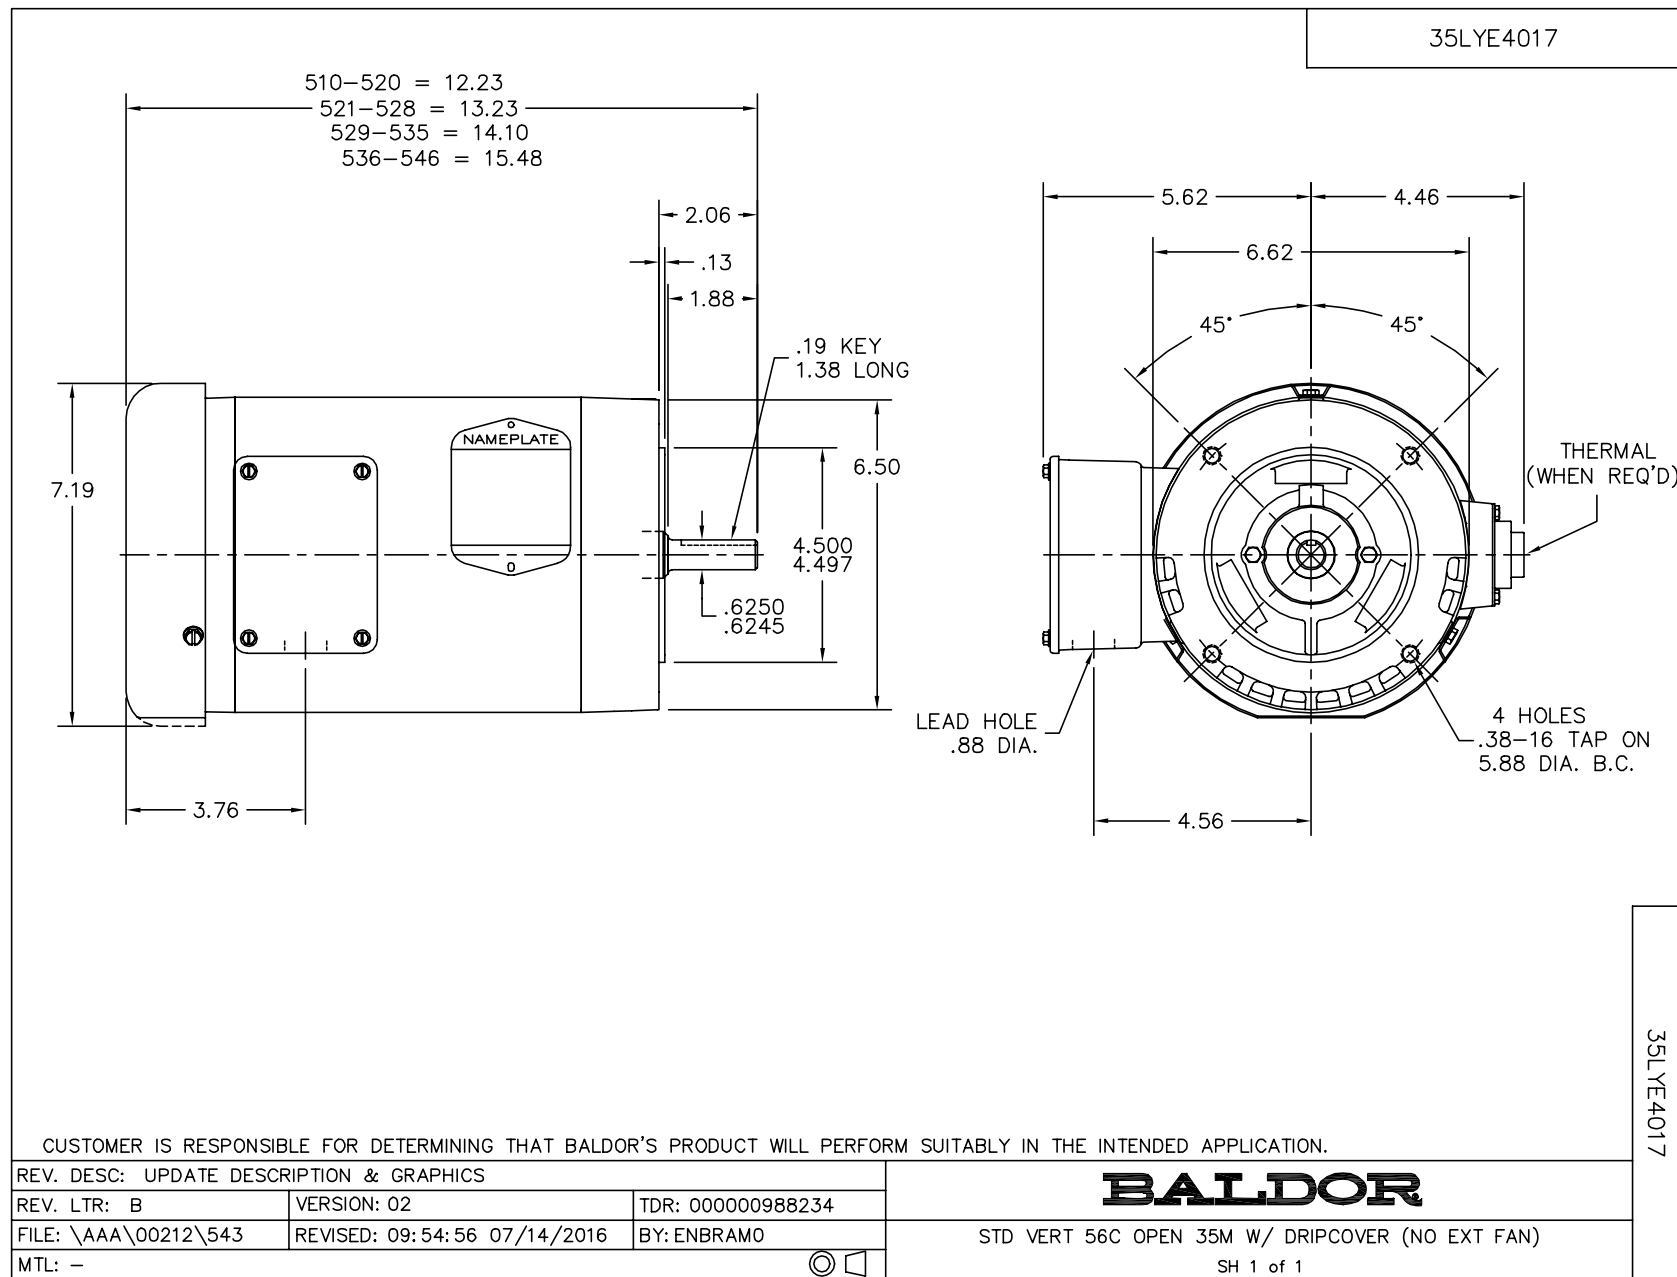
Nameplate Data				460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	.75			Full Load Torque	3.38 LB-FT
Volts	230/460			Start Configuration	direct on line
Full Load Amps	2.6/1.3			Breakdown Torque	11.8 LB-FT
R.P.M.	1160			Pull-up Torque	8.51 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	9.12 LB-FT
NEMA Design Code	B	KVA Code	K	Starting Current	8.42 A
Service Factor (S.F.)	1.15			No-load Current	0.922 A
NEMA Nom. Eff.	81.7	Power Factor	65	Line-line Res. @ 25°C	22.8 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	37°C
S.F. Amps				Temp. Rise @ S.F. Load	44°C
				Locked-rotor Power Factor	43.6
				Rotor inertia	0.143 LB-FT2

Load Characteristics 460 V, 60 Hz, 0.75 HP

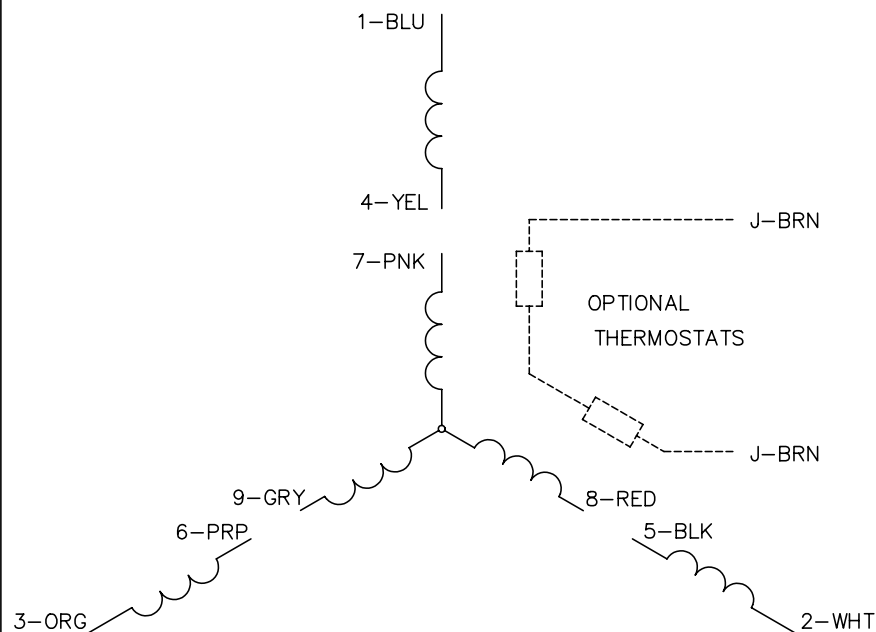

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	27	44	56	65	71	75	69
Efficiency	67.2	78.1	80.8	82	81.4	79.9	81.6
Speed	1191	1182	1172	1161	1149	1134	1154
Line amperes	0.951	1.03	1.16	1.32	1.52	1.75	1.44

Performance Graph at 460V, 60Hz, 0.75HP Typical performance - Not guaranteed values






CD0005


 LOW VOLTAGE
(2Y)


LINE

 HIGH VOLTAGE
(1Y)


LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

900000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005