

BALDOR® • RELIANCE

Product Information Packet

ECR9604TR

60HP,1780RPM,3PH,60HZ,365T,A36068M,TEFC

Part Detail							
Revision:	G	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	A36068M	Elec. Spec:	A36WG3907	CD Diagram:	416820-002
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:		Layout:	617428-034
Frame:	364T	Mounting:	F1	Poles:	04	Created Date:	02-03-2015
Base:		Rotation:	R	Insulation:	F	Eff. Date:	06-08-2016
Leads:	3#4,6#6					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate 000613007PV

CAT NO	ECR9604TR	SPEC NO.	P36G3503	DESIGN	A	INSUL.CLASS	F
HP	60	AMPS	140/69.9	VOLTS	230/460	SF	1.25
RPM	1780	RPM MAX	3600	HZ	60	AMB	40
D.E. BRG.DATA	NU313	O.D.E. BRG.DATA	6313	PH	3	DUTY	CONT
FRAME	364T	I.P.	55	TYPE	P	ENCL	TEFC
POWER FACTOR	85	3/4 LOAD EFF.	95.3	CODE	H	NEMA NOM EFFICIENCY	95
CHP HZ	60-90	CT HZ	6-60	VT HZ	6-60		
SER.NO.		MOTOR WEIGHT	977				
	1.25SF AMPS= 173/86						

Nameplate NP2496L

MOBIL SHC -220 GREASE

Parts List		
Part Number	Description	Quantity
SA293591	SA P36G3503	1.000 EA
RA279684	RA P36G3503	1.000 EA
000613007PV	SS NP, CRUSHER DUTY, EMBOSSED,MAIN MOTOR	1.000 EA
000692000VD	LABEL WARNING	1.000 EA
032018008AK	HHCS 1/4-20X1 PLATED	4.000 EA
032018012DK	HHCS 1/2-13X1-1/2 PLTD.	4.000 EA
032018024CK	HHCS 3/8-16X3 PLTD.	3.000 EA
034180012DA	KEY 1X4X1/4X1-1/2 L	1.000 EA
034530052AB	P/NIP 1/8X6-1/2 GALV.	1.000 EA
702676001C	FAN 360 - 56 PCS	1.000 EA
078559034A	+F/C A 078559001A - 360	1.000 EA
085922073B	BRKT 360 085922072WCC KB	1.000 EA
415045002E	SLGR	1.000 EA
415072001B	CLAMP	1.000 EA
415096002A	CPLG 1/8 HEX TYPE	1.000 EA
412118006A	DRAIN	1.000 EA
032018012DK	HHCS 1/2-13X1-1/2 PLTD.	4.000 EA
032018024CK	HHCS 3/8-16X3 PLTD.	3.000 EA
034530020AB	P/NIP 1/8X2-1/2 PLTED	1.000 EA
085922073B	BRKT 360 085922072WCC KB	1.000 EA
415045002E	SLGR	1.000 EA
415096002A	CPLG 1/8 HEX TYPE	1.000 EA
412118006A	DRAIN	1.000 EA
032018010CK	HHCS 3/8-16X1-1/4 PLTD.	4.000 EA

Parts List (continued)		
Part Number	Description	Quantity
033512008LB	HHTTS 1/4-20X1 PLATED	4.000 EA
034000014AB	WSH ID.406 OD.812 TH.065	4.000 EA
035000001A	ALFTG 1/8" 1610-BL	1.000 EA
035000001A	ALFTG 1/8" 1610-BL	1.000 EA
065776000C	TERBD 320-400	1.000 EA
067053000B	GASK 320-400	1.000 EA
076708000BB	C/B - 360	1.000 EA
076709000A	C/B - 360	1.000 EA
406099000A	PLUG - FAN COVER 320-440	1.000 EA
415000103H	TERMINAL LUG	1.000 EA
418150003A	GREASE FITTING CAP	1.000 EA
418150003A	GREASE FITTING CAP	1.000 EA
033775004EA	DRSCR #6-1/4 304 S.S.	4.000 EA
034180034HA	KEY 5/8X5/8X4-1/4 L	1.000 EA
MG1025G96	WILKOFASST SG, 779.7048, MOUSE GRAY #7048	0.250 GA
421948032	LABEL, MYLAR	1.000 EA
004824015AP	GREASE MOBILITH SHC 220	0.540 LB
000692000RT	N/P	1.000 EA
047174001Z	EXT SNAP RING	1.000 EA
NP2496L	MOTOR LUBE NAMEPLATE	1.000 EA
000613006PU	N/P (RELEASE QTY 10,000) UL CSA LABEL	1.000 EA
034001016AB	WSHR .562ID 1.375OD .109	1.000 EA
034001014AB	FLAT WASHER 3/8"PLATED	1.000 EA
415070001A	RUBBER MOUNT 3X3X1 THICK	1.000 EA

Product Information Packet: ECR9604TR - 60HP,1780RPM,3PH,60HZ,365T,A36068M,TEFC

032018024CK	HHCS 3/8-16X3 PLTD.	1.000 EA
032509020C	CARRIAGE BOLT - 360	3.000 EA
604797011R	320 FR. ROLLER BEARING MOTOR SHAFT	1.000 EA
HW1000A32	5/16 FL WASHER WIDE,ID=.344,OD=1.125	3.000 EA
PK5004A01	WOODEN BASE ASSY,314-316 FR.	1.000 EA
034530032BB	P/NIP 1/4X4" SCHED 40	1.000 EA
034631002AB	BUSH 1/4 TO 1/8 PLTD.	1.000 EA
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 EA
034631002AB	BUSH 1/4 TO 1/8 PLTD.	1.000 EA
034530020BB	P/NIP 1/4X2-1/2 PLATED	1.000 EA
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 EA
14PA1000	PACKAGING 314 GROUP COMBINED PRINT	1.000 EA
032018005DL	1/2-13 X 5/8 SILICON BRONZE HHCS	1.000 EA

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	364T	60	P	3/60	1780	230/460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
140/69.9	CONT	40/F	1.15	A	H	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
491620	418141038ZE	---	---	.0208/.0832		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	POWER FACTOR	% EFFICIENCY	
NO LOAD	0	24.0	1800	4.22	0	
1/4	15.0	29.5	1795	51.6	92.5	
2/4	30.0	40.5	1791	73.1	95.0	
3/4	45.0	54.4	1786	81.3	95.3	
4/4	60.0	69.9	1780	84.6	95.0	
5/4	75.0	86.1	1775	86.4	94.4	
SPEED TORQUE						
	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	285	505	501		
PULL UP	1200	230	408	420		
BREAKDOWN	1675	281	498	268		
FULL LOAD	1780	100	177	69.9		
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE REMARKS: CALCULATED DATA NEMA PREMIUM - 95.0 PCT NOMINAL EFFICIENCY						



A MEMBER OF THE ABB GROUP

DR. BY _____ CD _____

CK. BY _____ T. RELIANT _____

APP. BY _____ T. RELIANT _____


DATE 02/03/2015

A-C MOTOR


PERFORMANCE DATA

A36WG3907-R001

ISSUE DATE 02/03/20


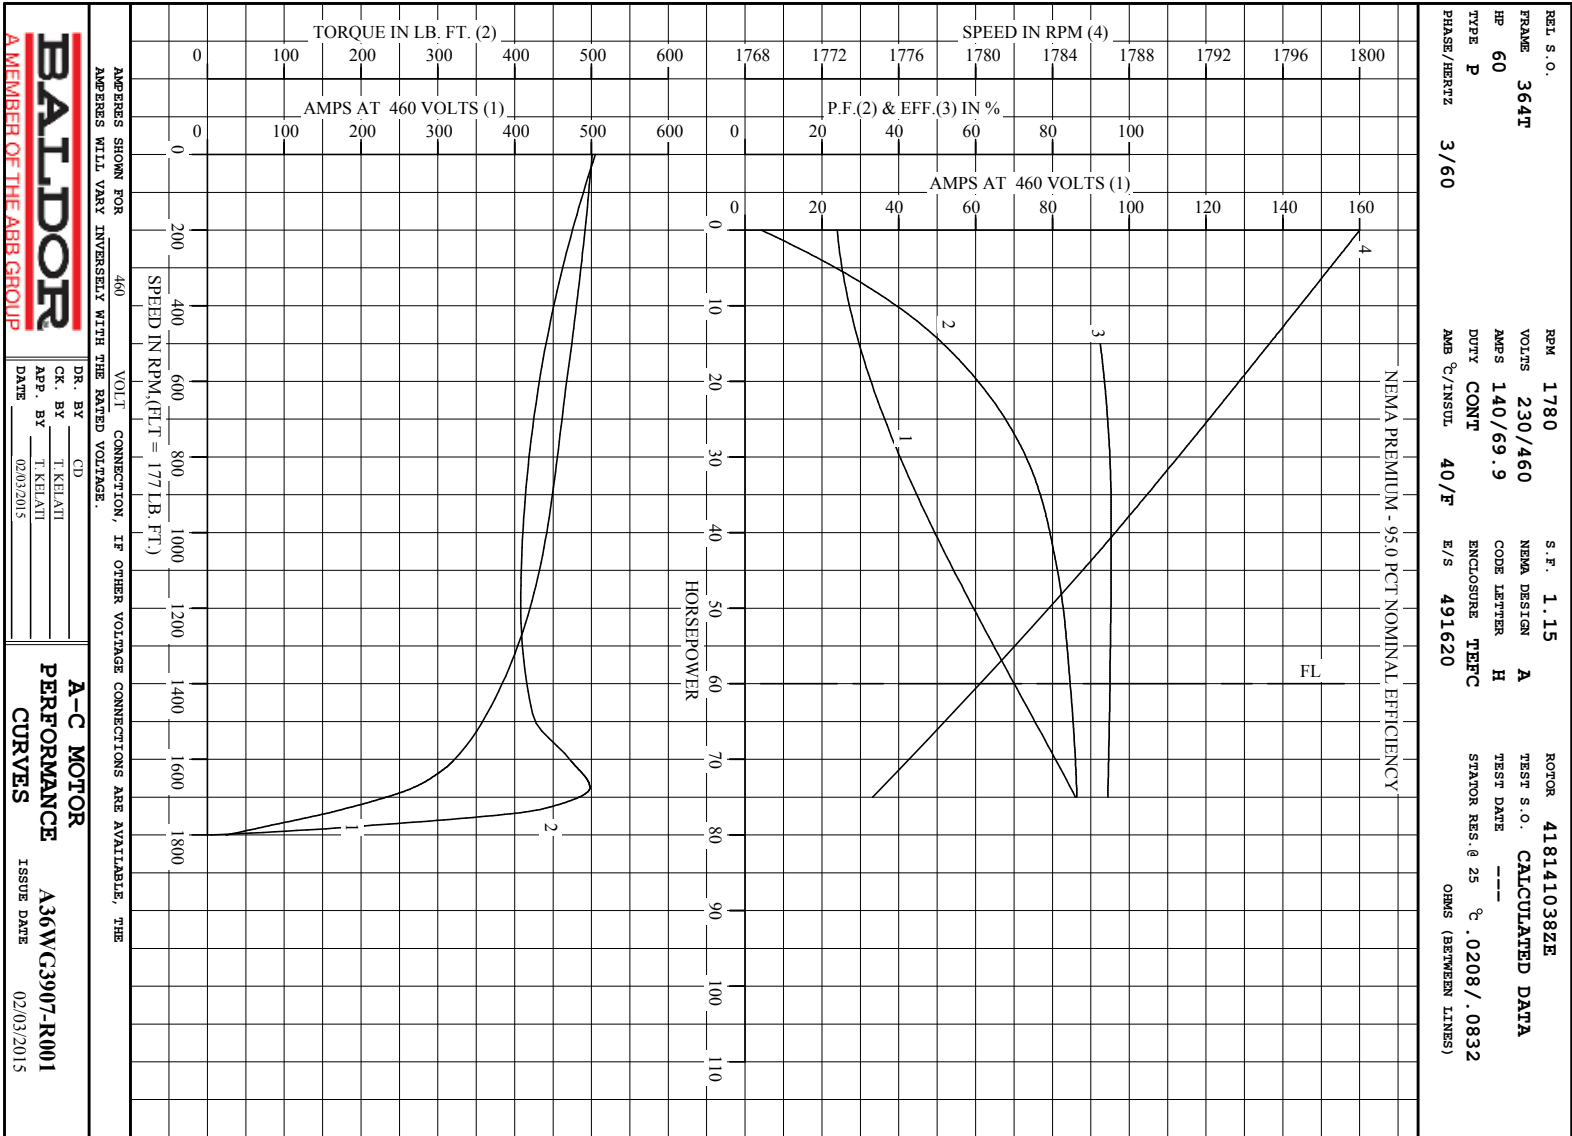


Printed on 2/3/15 16:05 @ ragsun

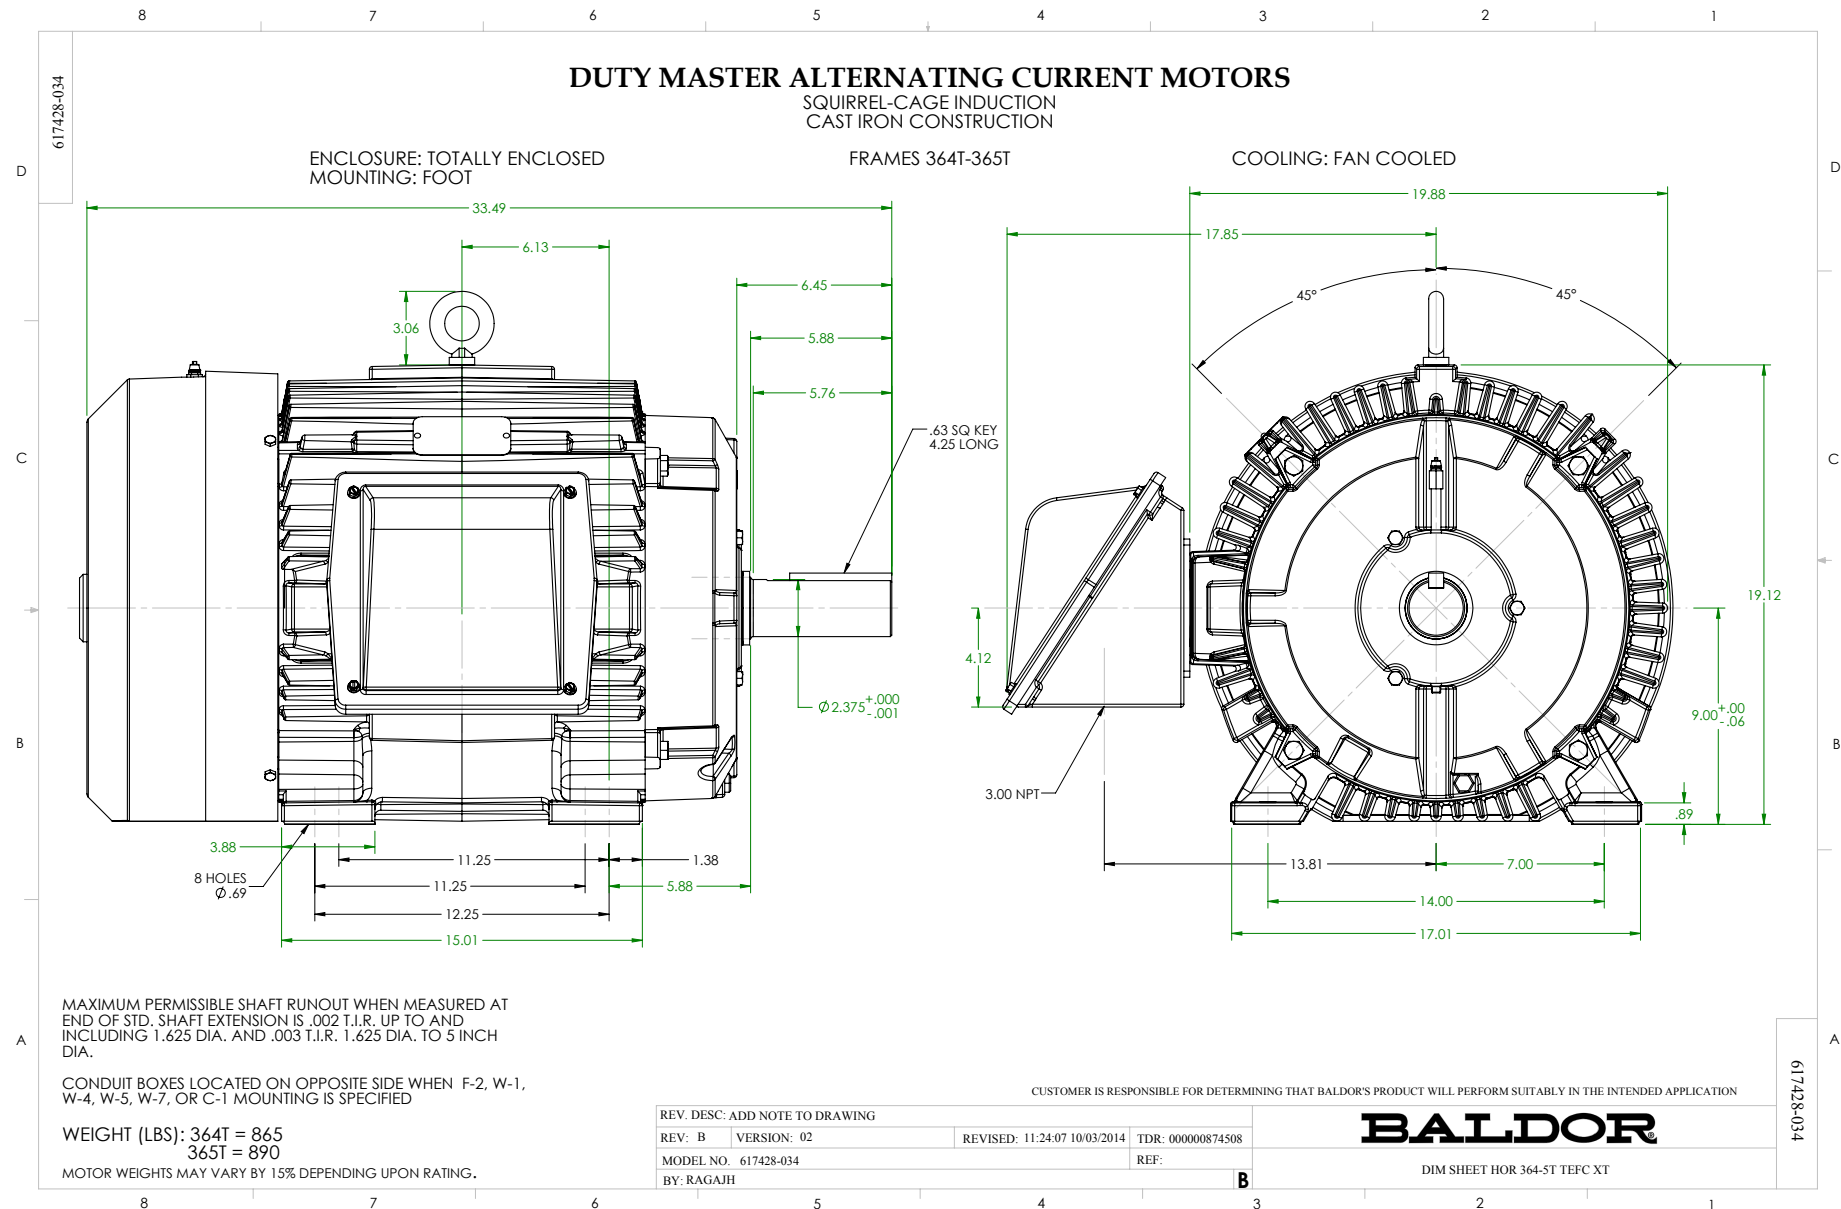

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

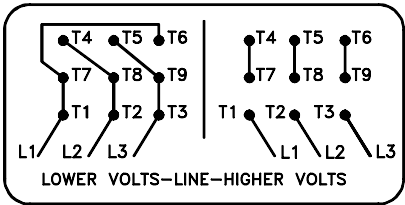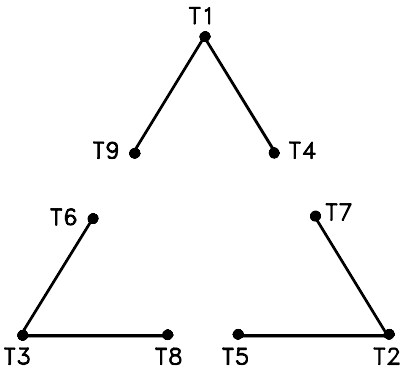

(N.P. 1575-B)

416820-002

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\661		REVISED: 10: 47: 51 04/30/2010
MTL: -		BY: RAGRA

BALDOR	
CONN DIAG - STANDARD 9 LEAD, DELTA-CONNECTED	
SH 1 of 1	

Marketing maintained PDF of MN408:

<http://www.baldor.com/support/Literature/Load.ashx/MN408?ManNumber=MN408>

Marketing maintained PDF of MN416:

<http://www.baldor.com/support/Literature/Load.ashx/MN416?ManNumber=MN416>