

BALDOR® • RELIANCE

Product Information Packet

OF2332T

10HP,1125RPM,3PH,60HZ,256T,0942M,TEFC,F2

Part Detail							
Revision:	AC	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	0942M	Elec. Spec:	09WGY172	CD Diagram:	CD0321
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	09F945	Layout:	09LYF945
Frame:	256T	Mounting:	F2	Poles:	06	Created Date:	
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	01-26-2017
Leads:	12#12 ML4400B12 Y					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP2960E

CAT.NO.	OF2332T										
SPEC.	09F945Y172G1										
HP	10										
VOLTS	230/460/796										
AMP	31/15.5/9										
RPM	1125										
FRAME	256T					HZ	60		PH	3	
SER.F.	1.15			CODE	H	DES			D	CL	F
NEMA-NOM-EFF	84			PF	72						
RATING	40C AMB-CONT										
CC											
DE	6309					ODE	6208			USABLE AT 208V	
ENCL	TEFC			SN							

Nameplate NP0090E

FRONT

6208

PULLEY

6309

LUBRICATE WITH

GREASE

POLYREX EM

Parts List		
Part Number	Description	Quantity
SA095327	SA 09F945Y172G1	1.000 EA
RA087792	RA 09F945Y172G1	1.000 EA
HW1002A63	WASHER, 5/8 HI-COLLAR SPRLOCKWASHER	1.000 EA
09CB1002A12P	KOBX W/1.25 NPT LEAD HOLE & 2.38 MTG HOL	1.000 EA
09GS1010	GASKET, DWG, LEADWIRE SEPERATOR	1.000 EA
10XN2520K12	1/4-20 X.75 GRD 5	4.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 EA
WD1000B16	T&B CX70TN TERMINAL	1.000 EA
10XN2520K06	1/4-20 X 3/8" HX HD SCREWGRADE 5, ZINC P	1.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	1.000 EA
09EP1100A14PP5	ENDPLATE, MACH W/EPOXY PRIMER & PAINT	1.000 EA
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 EA
HA3400A33	STUD- 3/8-16 X 4.82 HEX WELKER	4.000 EA
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 EA
HW4600B44	V-RING SLINGER 1.500 X 1.810 X .28 VITON	1.000 EA
09FH1000P	FAN COVER, CAST W/EPOXY PRIMER	1.000 EA
HW4600B44	V-RING SLINGER 1.500 X 1.810 X .28 VITON	1.000 EA
HW5100A08	W3118-035 WVY WSHR (WB)	1.000 EA
10XN2520K28	1/4-20 X 1.75" HX HD SCRWGRADE 5, ZINC P	2.000 EA
10XN2520K36	1/4-20 X 2.25" HX HD SCRWGRADE 5, ZINC P	4.000 EA
09EP1101A21P	SPL PU EP,MODEL 309 - 309 BRG, W/EPOXY P	1.000 EA
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 EA
10XN3816K24	3/8-16 X 1.50 HEX HD CAP SCREW, GRADE 5	4.000 EA
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 EA

Parts List (continued)		
Part Number	Description	Quantity
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 EA
XY3816A12	3/8-16 FINISHED NUT	4.000 EA
12CB1503A01P	KOLD MACH, W/LIP & EPOXY PRIMER	1.000 EA
12GS1002	GASKET, CONDUIT BOX LID, NEOP	1.000 EA
10XN3118K16	5/16-18 X 1' GRADE #5, STL, ZINC PLATE	2.000 EA
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	2.000 EA
HW2501G25	KEY, 3/8 SQ X 2.875	1.000 EA
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.031 QT
LB1115N	LABEL,LIFTING DEVICE (ON ROLLS)	1.000 EA
LB1002N	LABEL,MARINE DUTY (ON ROLLS)	1.000 EA
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 EA
HW4500A05	1669B ALEM/UNIV860 GR FTG X	1.000 EA
HA4054	SHORT T-DRAIN FITTING, .125" N.P.T.	1.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.080 LB
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 EA
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 EA
HA4054	SHORT T-DRAIN FITTING, .125" N.P.T.	1.000 EA
09FN3001A01	EXTERNAL FAN, PLASTIC	1.000 EA
HW2500A25	WOODRUFF KEY USA #1008 #BLOW CARBON STEE	1.000 EA
51XB1214A20	12-14X1.25 HXWSSLD SERTYB	1.000 EA
MG1025G03	WILKOFASST, 789.901, OIL RIG SILVER	0.050 GA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	4.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1000/bx) 11/14	1.000 EA
MJ5001A14	DYNAPRO SEAL, CP MOTORS VC#2508050 (603	0.023 EA

LB1119N	WARNING LABEL	1.000 EA
LC0321	CONNECTION LABEL	1.000 EA
NP2960E	SS CP CSA CC	1.000 EA
NP0090E	SS NO LOGO'S BEARING & GREASE DATA	1.000 EA
09PA1000	PACKAGING GROUP COMBINED PRINT	1.000 EA

Accessories		
Part Number	Description	Multiplier
09-1309	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 1883 - Typical performance - not guaranteed values


Winding: 09WGY172-R002	Type: 0942M	Enclosure: TEFC
-------------------------------	--------------------	------------------------

Nameplate Data				460 V, 60 Hz: 2nd Voltage Connection	
Rated Output (HP)	10			Full Load Torque	46.8 LB-FT
Volts	230/460/796			Start Configuration	direct on line
Full Load Amps	31/15.5/9			Breakdown Torque	145 LB-FT
R.P.M.	1125			Pull-up Torque	108 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	122 LB-FT
NEMA Design Code	D	KVA Code	H	Starting Current	79.6 A
Service Factor (S.F.)	1.15			No-load Current	8.92 A
NEMA Nom. Eff.	84	Power Factor	72	Line-line Res. @ 25°C	0.821 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	83°C
S.F. Amps				Temp. Rise @ S.F. Load	104°C



Load Characteristics 460 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	30	51	63	71	75	77	73
Efficiency	77.7	84.9	85.9	84.8	82.6	79.4	83.5
Speed	1183	1164	1146	1121	1093	1059	1104
Line amperes	9.4	10.8	12.7	15.6	18.9	23	17.58

Performance Graph at 460V, 60Hz, 10.0HP Typical performance - Not guaranteed values

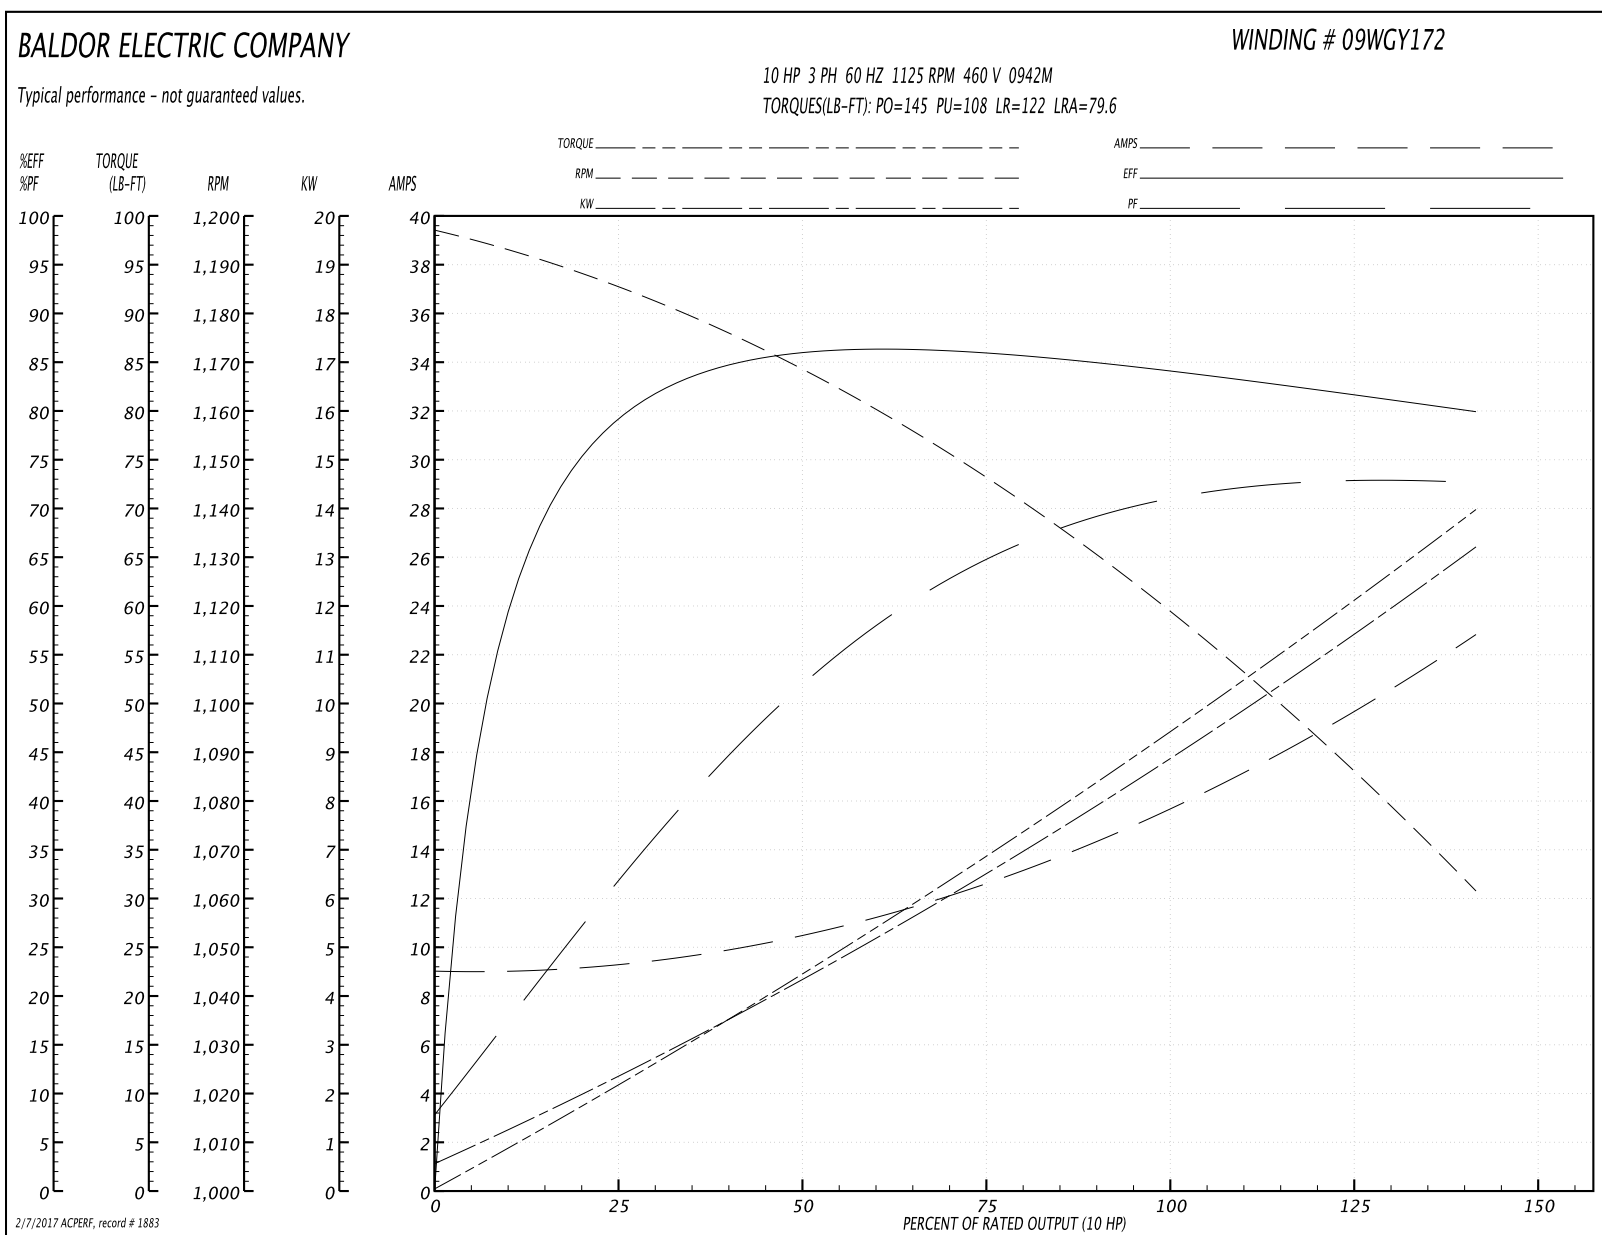

09LYF945

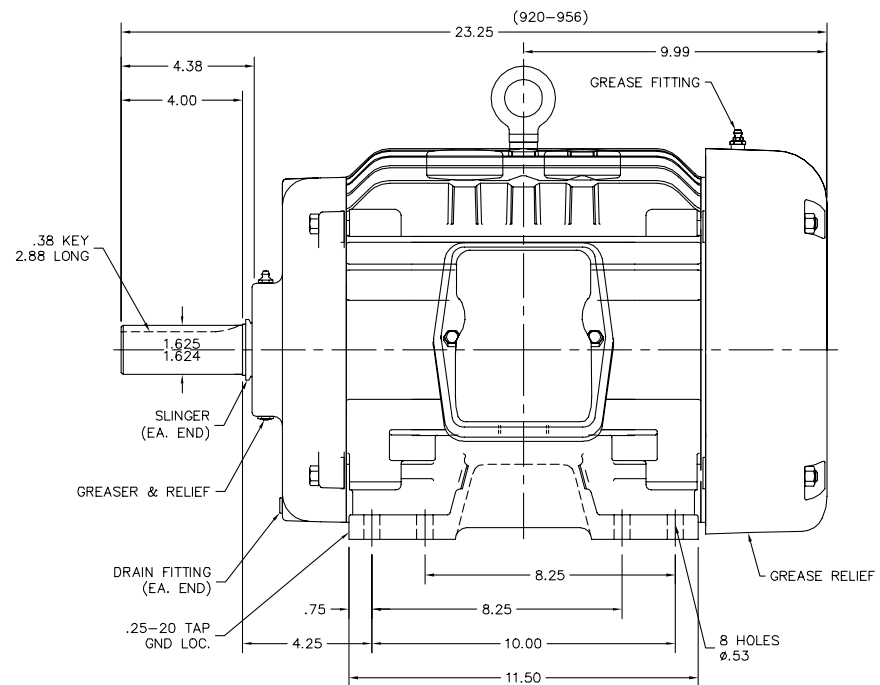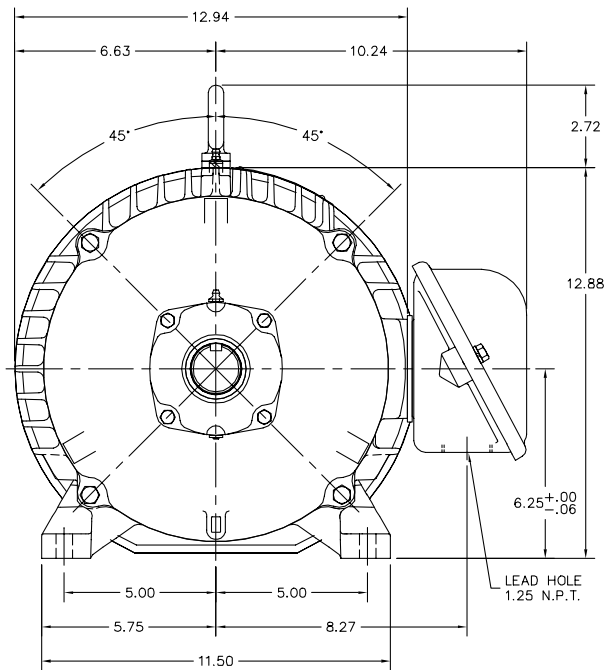


09LYF945

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: ADDED GND HOLE TAP SIZE	VERSION: 06	TDR: 000000954909
REV. LTR: F	REvised: 12:47:28 12/07/2015	BY: ENNINDO
FILE: \AAA\00100\535		
MTL: -		

BALDOR

HORZ TEFC 254-6T CP F2 OIL FIELD PUMP
SH 1 of 1

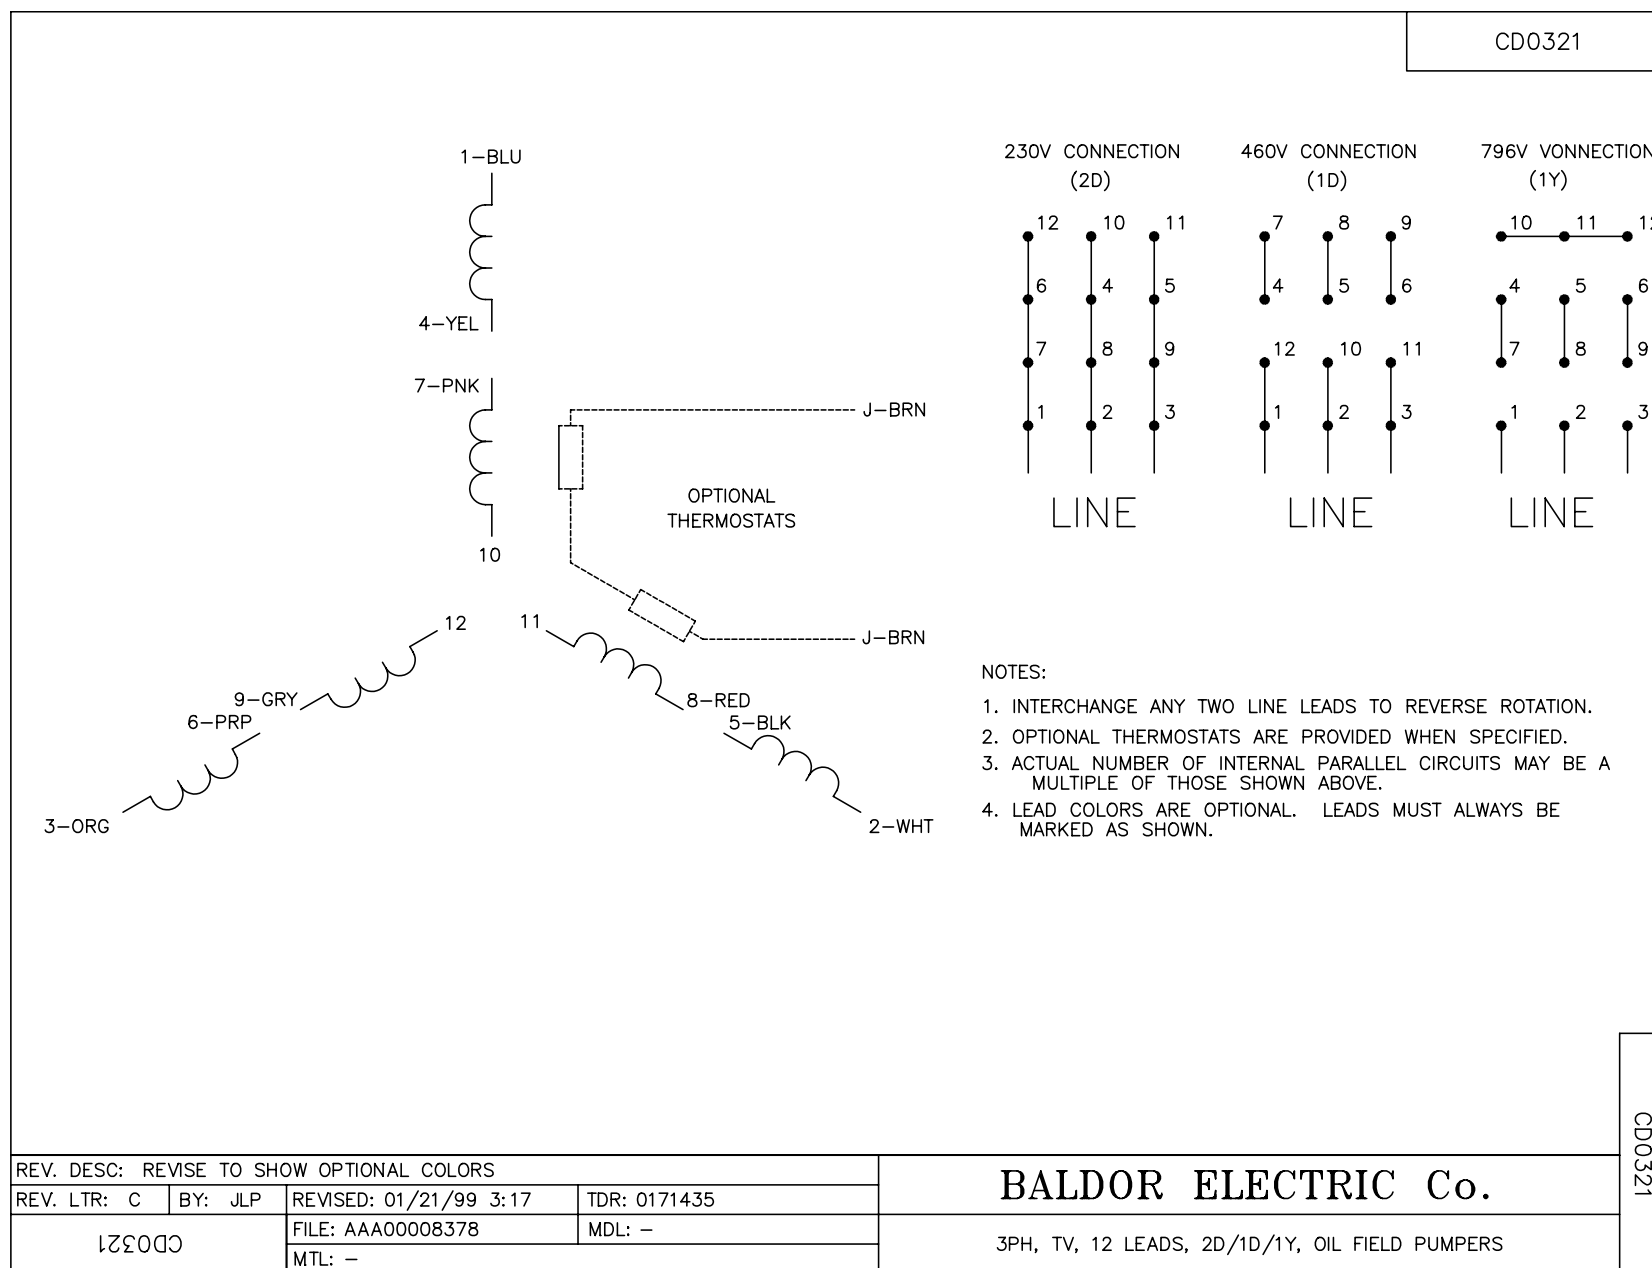

Marketing maintained PDF of MN416:

<http://www.baldor.com/support/Literature/Load.ashx/MN416?ManNumber=MN416>