

BALDOR® • RELIANCE

Product Information Packet

WDM3561TP

3HP,1640RPM,3PH,60HZ,145T,3544M,TEFC,F3

Part Detail							
Revision:	J	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3540M	Elec. Spec:	35WGL309	CD Diagram:	CD0005
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	35E2679	Layout:	35LYE2679
Frame:	145T	Mounting:	F3	Poles:	04	Created Date:	05-15-2015
Base:	RG	Rotation:	R	Insulation:	H	Eff. Date:	02-15-2017
Leads:	9#18 Y					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1496L

CAT.NO.	WDM3561TP											
SPEC.	35E2679L309G1											
HP	3											
VOLTS	230/460											
AMP	8/4											
RPM	1640											
FRAME	145T				HZ		60			PH	3	
SER.F.	1.00			CODE	J	DES		D	CLASS			H
NEMA-NOM-EFF	81			PF	87							
RATING	40C AMB-CONT											
CC				USABLE AT 208V								
DE	6205			ODE		6203						
ENCL	TEFC		SN									

Parts List		
Part Number	Description	Quantity
SA300790	SA 35E2679L309G1	1.000 EA
RA287850	RA 35E2679L309G1	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB3010A01W	35 CB .75 NPT @ 6:00, WHITE EPOXY	1.000 EA
35GS1022A03	GASKET BOX .125 THK WHITE NEOPRENE	1.000 EA
RM1006A03	GROMMET, #2867 1.12 HOLE (ATLANTIC INDIA	1.000 EA
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 EA
HA5027A01	HA4066A01 T-DRAIN X2 BAGGED	1.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
HW3001B01	BRASS CUP WASHER, FOR #8 SCREW	1.000 EA
35EP3100M57MW	FREP TEFC,"O" DRILLS,NO GRSR, CLIPPER	1.000 EA
HW4032A01	BLACK DRAIN PLUG FOR WASH DOWN MOTORS	3.000 EA
HW5100A03	WAVY WASHER (W1543-017)	1.000 EA
35PE3101A55MW	PUEP ASSEMBLY FOR ROUTING	1.000 EA
HW4032A01	BLACK DRAIN PLUG FOR WASH DOWN MOTORS	3.000 EA
HW4606A02	JM CLIPPER/SEAL (LWE-0938-1624-AL23)	1.000 EA
XY1032S02	10-32 HEX NUT R.H. S STL	4.000 EA
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 EA
35FH4005A32SP	IEC FH NO GRSR W/3 HOLES - PRIMED	1.000 EA
11XW1032S06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	3.000 EA
HW4606A01	JM CLIPPER/SEAL (WDE-0667-1064-BH49)	1.000 EA
35CB4522	35 LIPPED CB LID PRIMED	1.000 EA
35GS1030A02	35 GS FOR CB LID - WHITE NEOPRENE	1.000 EA
59XW0832S07	TAPTITE II,HEX WSHR UNSLTD SER,410 S.S.,	4.000 EA

Parts List (continued)		
Part Number	Description	Quantity
HW2502D13	SS KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A01	KEY RETAINER 7/8" DIA SHAFT	1.000 EA
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 QT
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
LB1164	LABEL,WARNING AND DRAIN	1.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
35FN3002A05SP	EXFN, PLASTIC, 6.376 OD, .638 ID	1.000 EA
MG1025Z02	ACTIVATOR WILKOFAS 060.02HF	0.010 GA
MG1025W01	WILKOFAS 781.01, SIGNAL WHITE #9003	0.017 GA
HA3100S10	THRUBOLT 11.50LG SS	4.000 EA
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 EA
NP1496L	SS WD UL CSA CC	1.000 EA
36PA1001	PKG GRP, PRINT PK1017A06	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1000/bx) 11/14	1.000 EA

AC Induction Motor Performance Data

Record # 54195 - Typical performance - not guaranteed values

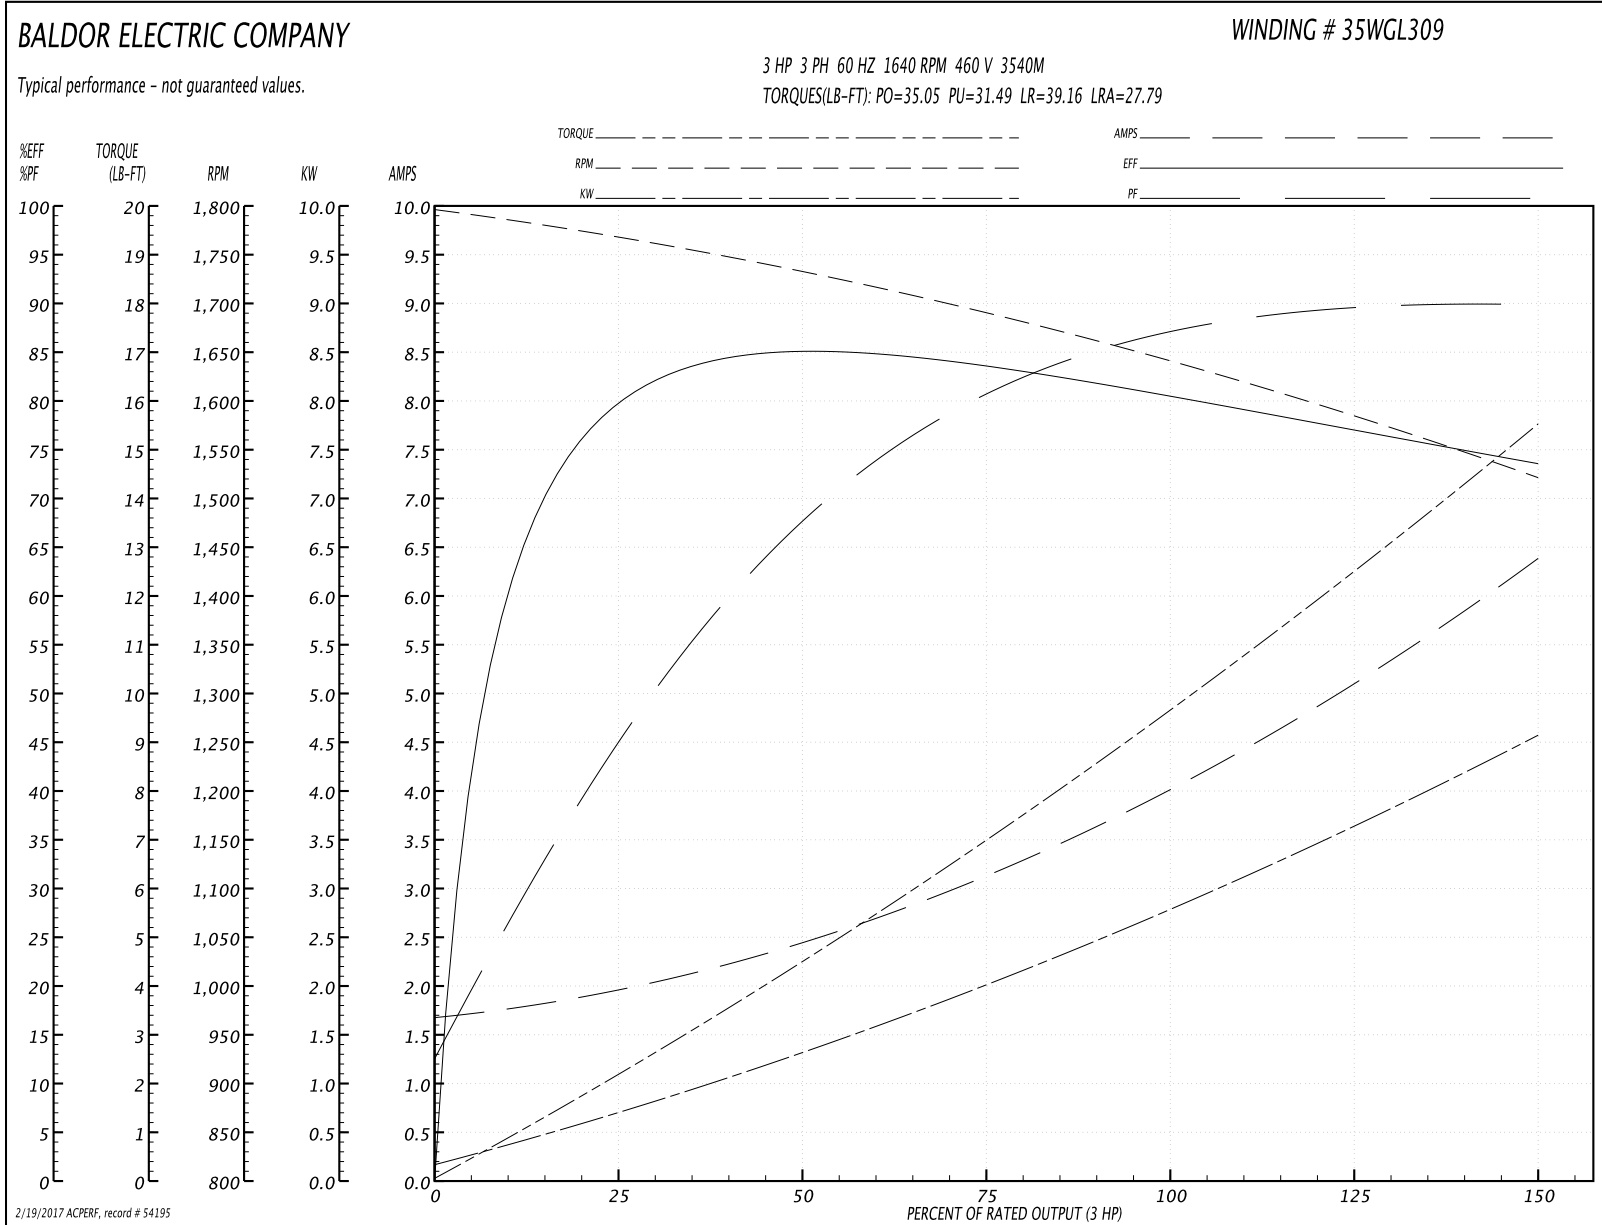
Winding: 35WGL309-R001	Type: 3540M	Enclosure: TEFC
-------------------------------	--------------------	------------------------

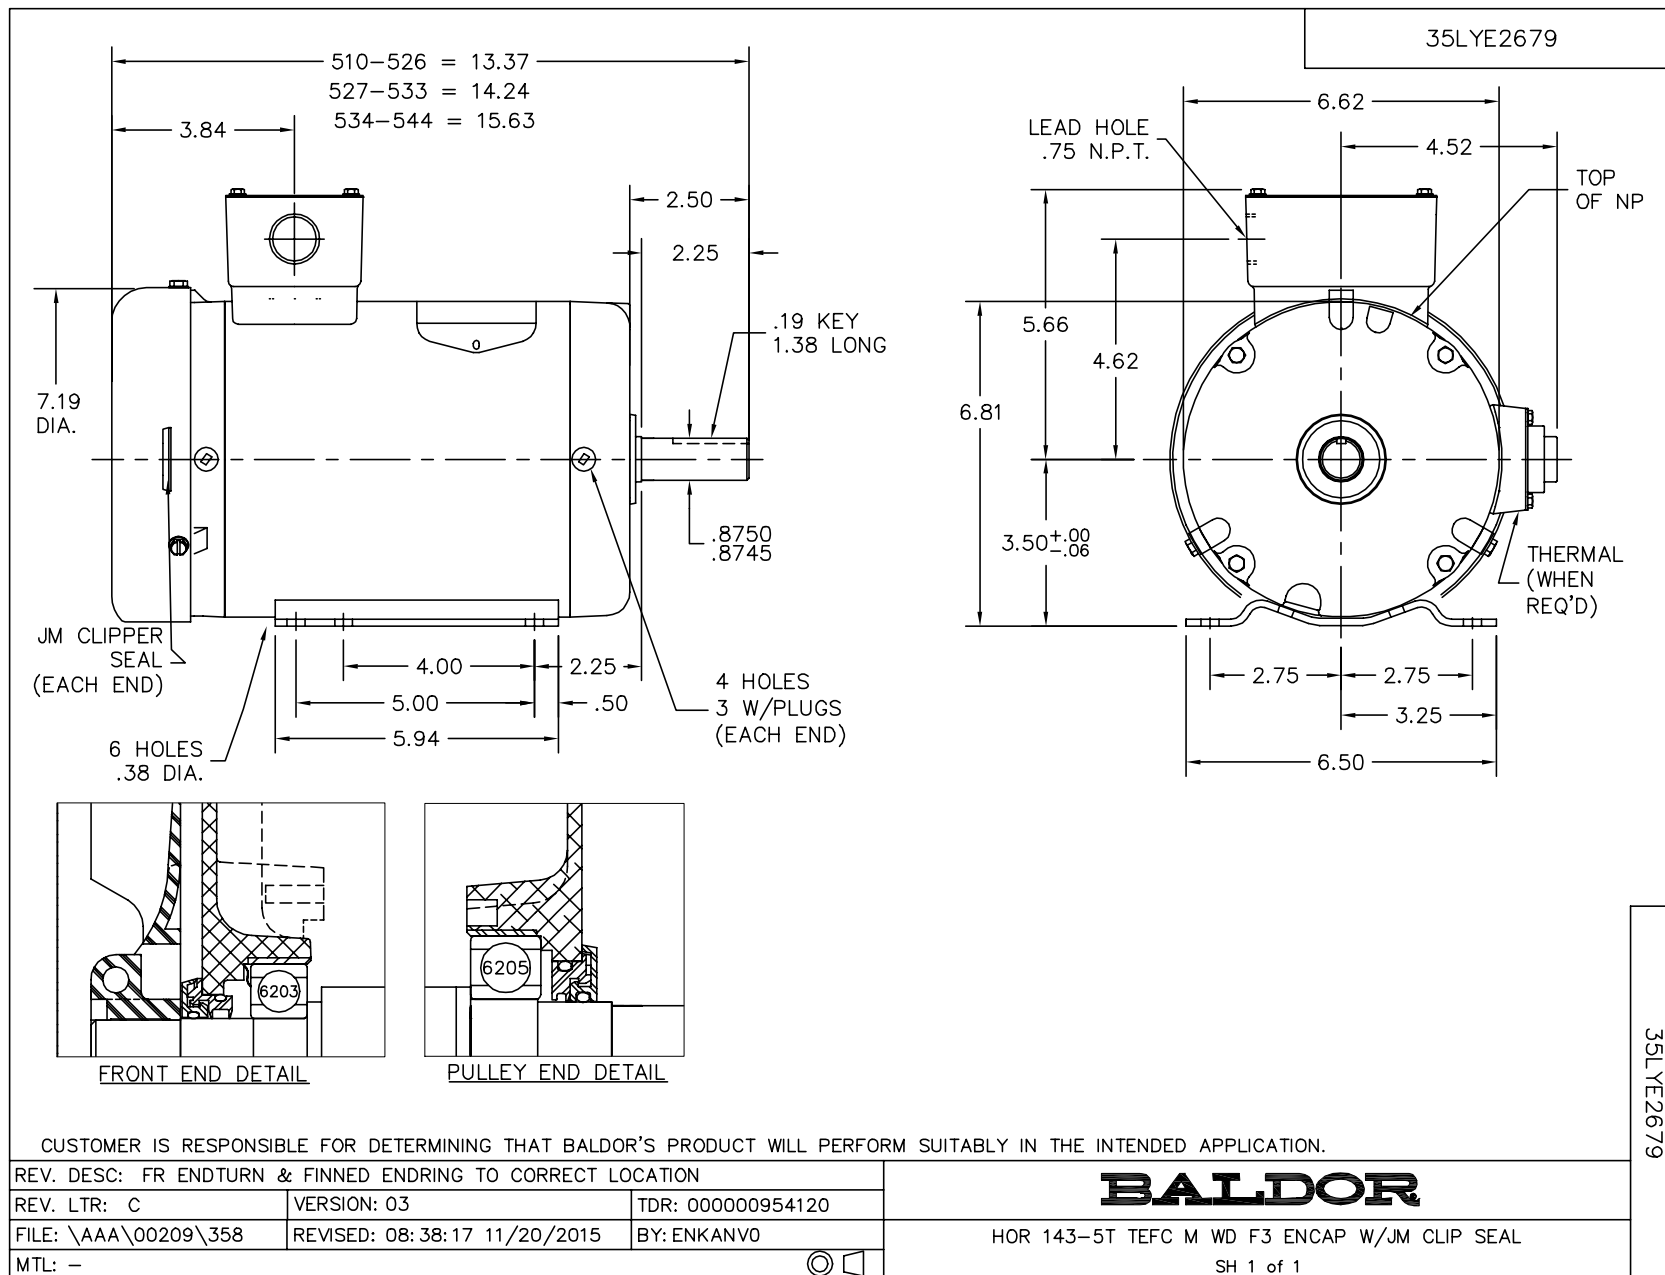
Nameplate Data				460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	3			Full Load Torque	9.6 LB-FT
Volts	230/460			Start Configuration	direct on line
Full Load Amps	8/4			Breakdown Torque	35.05 LB-FT
R.P.M.	1640			Pull-up Torque	31.49 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	39.16 LB-FT
NEMA Design Code	D	KVA Code	J	Starting Current	27.79 A
Service Factor (S.F.)	1			No-load Current	1.7 A
NEMA Nom. Eff.	81	Power Factor	87	Line-line Res. @ 25°C	5.27 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	95°C
				Locked-rotor Power Factor	63.9
				Rotor inertia	0.237 LB-FT ²

Load Characteristics 460 V, 60 Hz, 3 HP

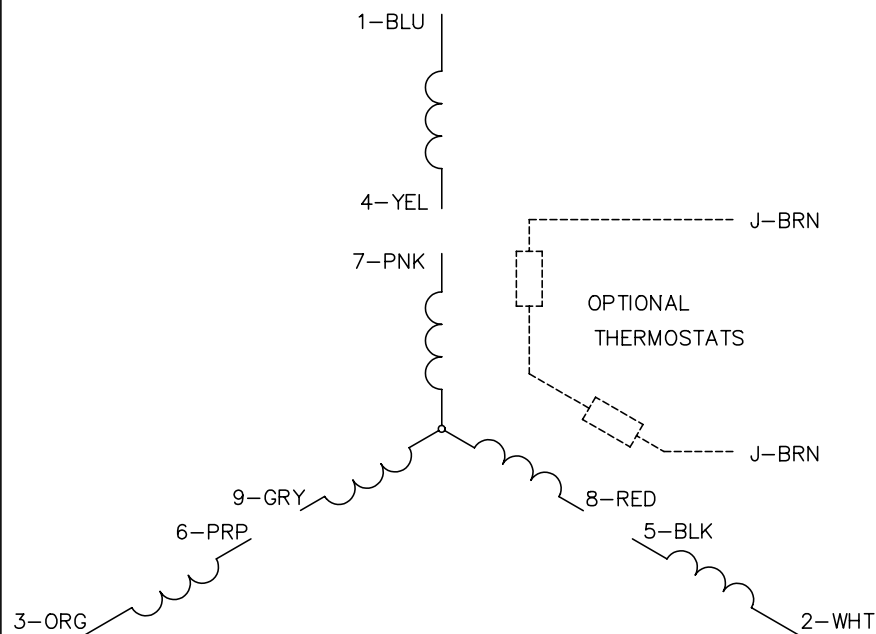

% of Rated Load	25	50	75	100	125	150
Power Factor	48	70	80	86	89	90
Efficiency	77.7	83.4	83.2	81.2	78	73
Speed	1765	1728	1690	1644	1589	1518
Line amperes	1.92	2.47	3.16	4.02	5.07	6.39

Performance Graph at 460V, 60Hz, 3.0HP Typical performance - Not guaranteed values






CD0005

LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

900000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005