

BALDOR® • RELIANCE

Product Information Packet

IDWNM3611T

3HP,1760RPM,3PH,60HZ,184TC,3640M,TENV,F1

Part Detail							
Revision:	H	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3640M	Elec. Spec:	36WGS952	CD Diagram:	CD0005
Enclosure:	TENV	Mfg Plant:		Mech. Spec:	36J565	Layout:	36LYJ565
Frame:	184TC	Mounting:	F1	Poles:	04	Created Date:	05-31-2012
Base:	RG	Rotation:	R	Insulation:	H	Eff. Date:	05-09-2015
Leads:	9#16					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1608L									
CAT NO	IDWNM3611T								
SPEC.	36J565S952G1								
FRAME	184TC	HP		3	TE				
VOLTS	230/460								
MAG CUR	4.2/2.1				FLA	8.2/4.1			
RPM	1760				RPM MAX	6000			
HZ	60		PH	3	CLASS		H		
SER.F.	1.00		DES	B	SL HZ		1.4		
NEMA-NOM-EFF	89.5		WK2	0.372					
BLWR V			PH		HZ		A		
RATING	40C AMB-CONT								
DE BRG	6206		ODE BRG		6205				
CC	010A		SN						

Parts List		
Part Number	Description	Quantity
SA245428	SA 36J565S952G1	1.000 EA
RA232315	RA 36J565S952G1	1.000 EA
36CB3005A03W	36 CB .75 NPT @ 6 W/WHITE EPOXY	1.000 EA
35GS1022A03	GASKET BOX .125 THK WHITE NEOPRENE	1.000 EA
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 EA
HA5027A01	HA4066A01 T-DRAIN X2 BAGGED	1.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
36EP3104A77MW	FREP TENV 205 BRG, (WD) FOR THRU-SHAFT	1.000 EA
HW4032A01	BLACK DRAIN PLUG FOR WASH DOWN MOTORS	3.000 EA
HW4600B49	SEAL 0.938 X 1.624 X 0.250 SINGLE LIP DB	1.000 EA
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 EA
36PE3301A27MW	PUEP ASSEMBLY FOR ROUTING PURPOSES	1.000 EA
HW4032A01	BLACK DRAIN PLUG FOR WASH DOWN MOTORS	3.000 EA
HW4600B50SP	SEAL 1.156 X 1.874 X 0.250 SINGLE LIP DB	1.000 EA
10XN2520S26	1/4-20X 1 5/8 HEX HD SS	4.000 EA
35FH4801W	THRU-SHAFT ENCODER COVER INV/VEC F1 & F2	1.000 EA
WD4129	1.50 X 1.50 GRAY SNAP IN PLUG PROMOULD #	2.000 EA
10XN2520S08	SCREW, 1/4-20 X 1/2 HHCS SS	4.000 EA
10XN2520S08	SCREW, 1/4-20 X 1/2 HHCS SS	1.000 EA
36CB4518	36 LIPPED CB LID PRIMED	1.000 EA
37GS3010	1/16"WHITE LID GASKET	1.000 EA
59XW0832S07	TAPTITE II,HEX WSHR UNSLTD SER,410 S.S.,	4.000 EA
HW1003S08	WASHER, #8 EX TH LK, SS	4.000 EA
HW4600B36SP	V-RING SLINGER 1.188 X 1.690 X .24 VITON	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
HW2502E16	#303 SS,SQ KEY 1/4 X 1.750	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
MJ5004A05	#242-21 LOCTITE GENERAL PURPOSE MED. STR	0.005 EA
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 QT
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
LB1164	LABEL,WARNING AND DRAIN	1.000 EA
HW3200A01	3/8-16X3/4 I-BLT WELDED F/S	1.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
MG1025Z02	ACTIVATOR WILKOFAS 060.02HF	0.010 GA
MG1025W01	WILKOFAS 781.01, SIGNAL WHITE #9003	0.022 GA
HA3101S28	THRUBOLT- 1/4-20 X 12.50 SS	4.000 EA
LB1115N	LABEL,LIFTING DEVICE (ON ROLLS)	1.000 EA
LC0145B01	CONNECTION LABEL	1.000 EA
NP1608L	SS WD INV UL CSA CC REV MTG	1.000 EA
36PA1001	PKG GRP, PRINT PK1017A06	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1000/bx) 11/14	1.000 EA

AC Induction Motor Performance Data

Page 1 of 1



AC Induction Motor Performance Data

Record # 39007

Typical performance - not guaranteed values

Winding: 36WGS952	Type: 3640M	Enclosure: TENV
--------------------------	--------------------	------------------------

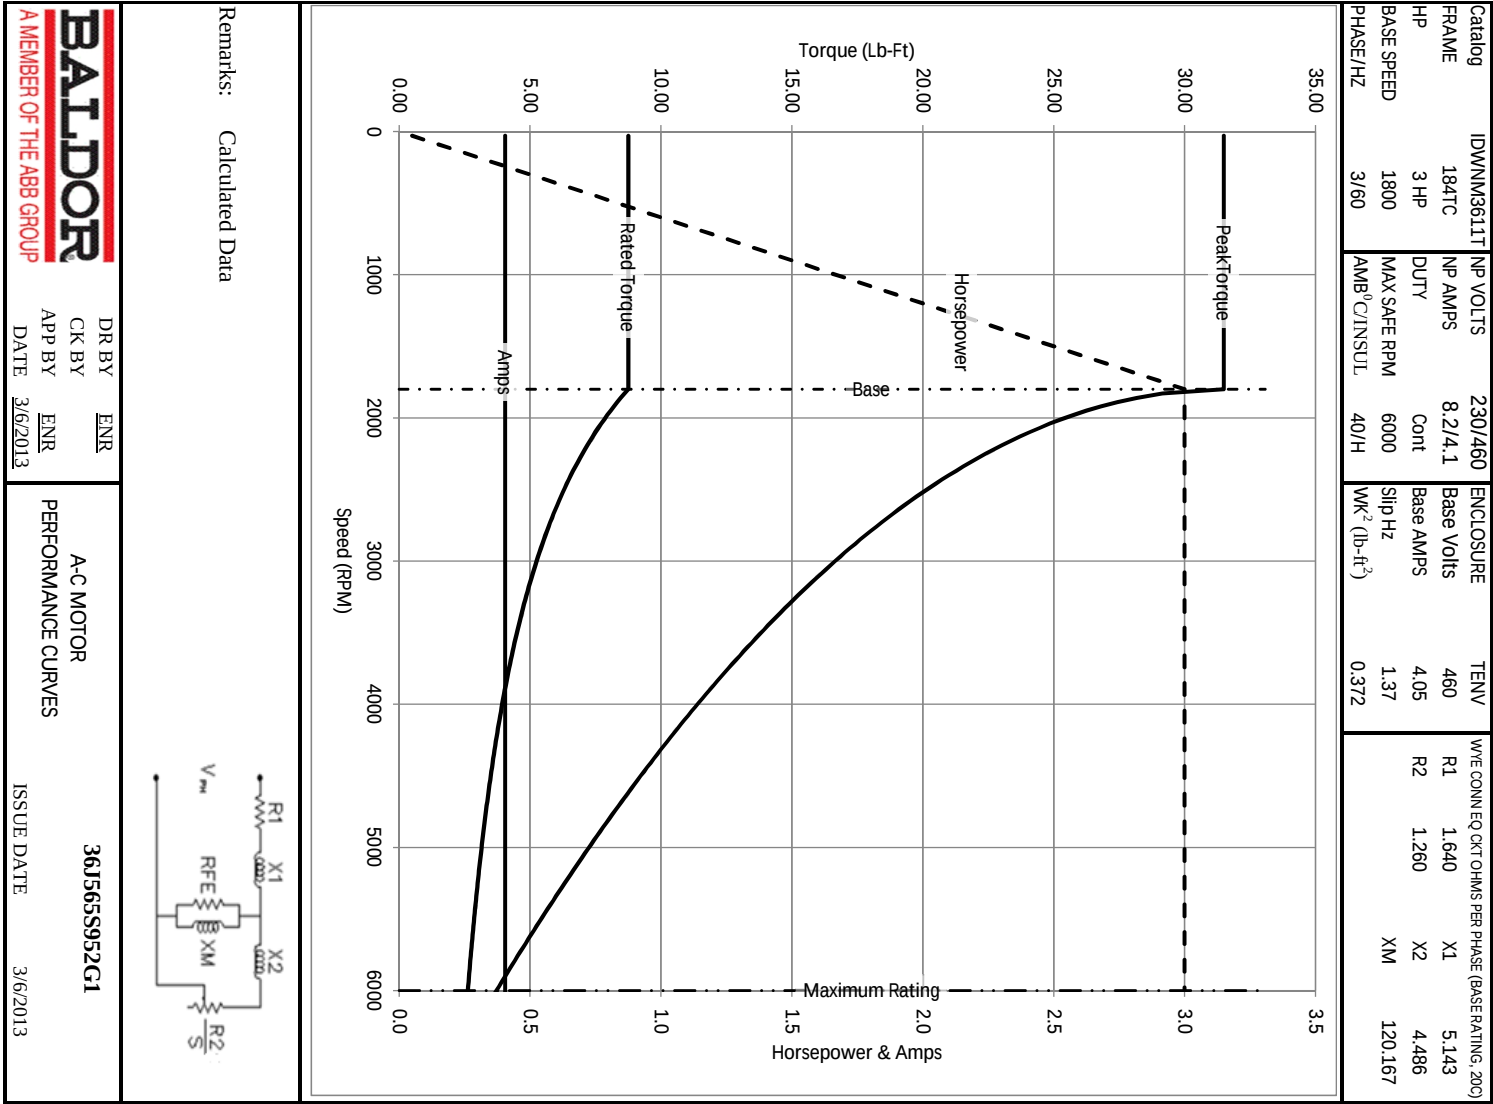
Nameplate Data			General Characteristics at 460 V, 60 Hz: High Volt Connection				
Rated Output (HP)	3		Full Load Torque	9.1 LB-FT			
Volts	208-230/460		Start Configuration	DOL			
Full Load Amps	8.6-8.2/4.1		Break Down Torque	35 LB-FT			
R.P.M.	1760		Pull-Up Torque	18.8 LB-FT			
Hz	60	Phase	Locked-rotor Torque	22.7 LB-FT			
NEMA Design Code	B	KVA Code	Starting Current	32.9 Amps			
Service Factor	1		No-load Current	2.09 Amps			
NEMA Nom. Eff.	89.5	P.F.	Line-line Res. @ 25°C.	3.3157 Ohms			
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	74°C			
S.F. Amps			Temp. Rise @ S.F. Load				

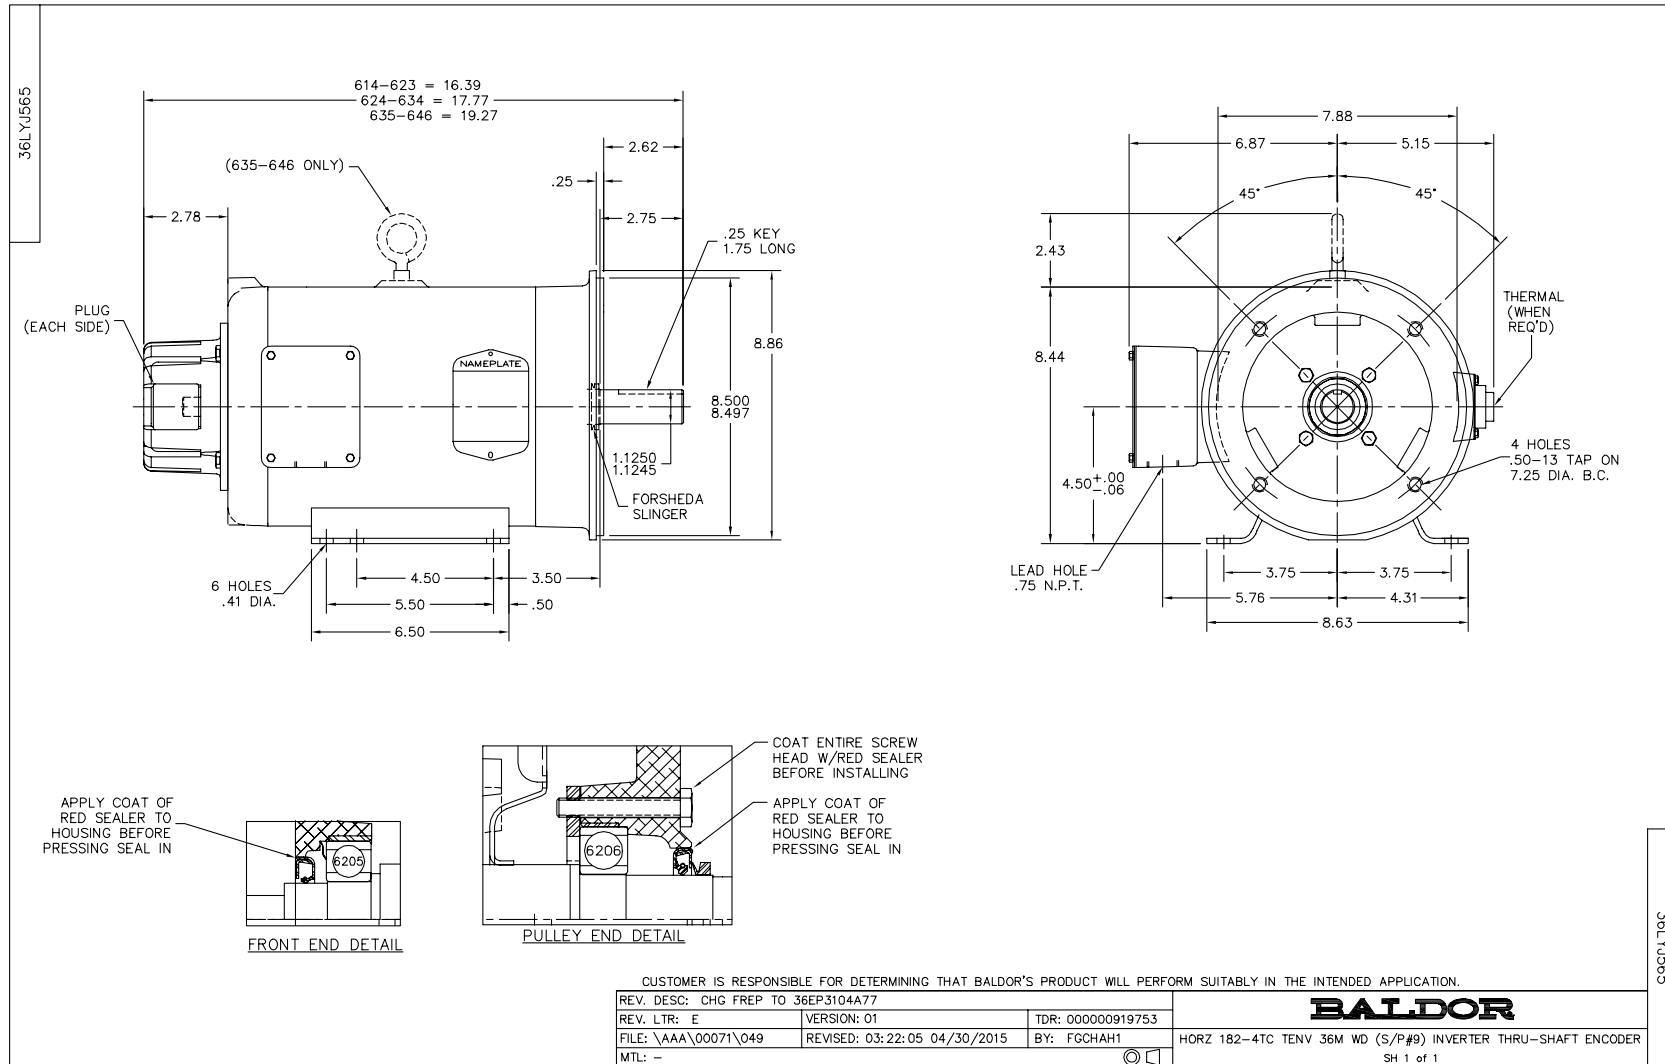
Load Characteristics at 460 Volts, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	38	60	71	78	82	84	
Efficiency	83.8	89.3	90.4	90.3	89.6	88.5	
Speed	1790.1	1780.3	1769.9	1758.7	1746.6	1732.6	
Line Amperes	2.29	2.72	3.34	4.05	4.86	5.75	

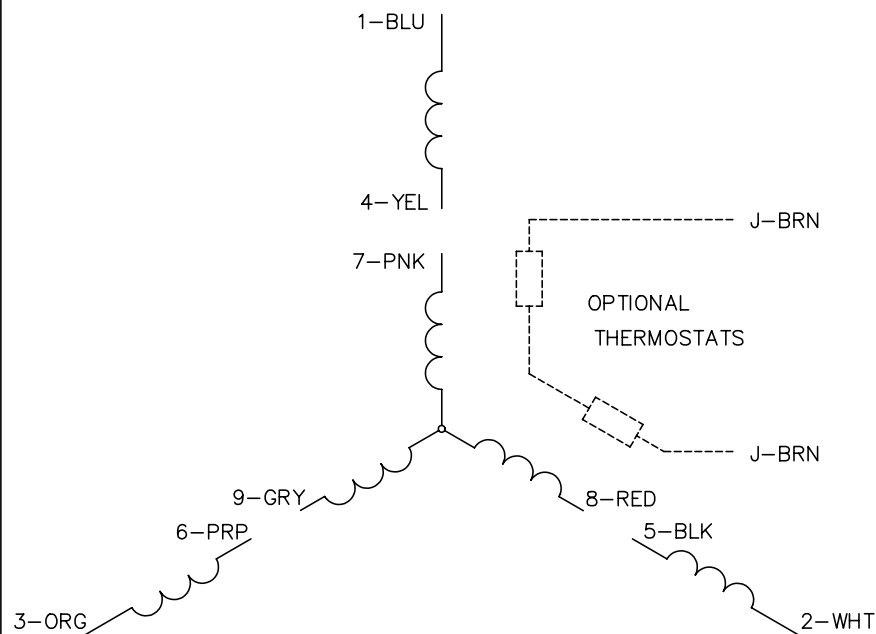

Baldor Electric Company Fort Smith, Arkansas








CD0005


 LOW VOLTAGE
(2Y)


LINE

 HIGH VOLTAGE
(1Y)


LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

900000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005