

BALDOR® • RELIANCE

Product Information Packet

IDCSWDM3615T

5HP,1750RPM,3PH,60HZ,184TC,3646M,TEFC,F1

Part Detail							
Revision:	L	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3646M	Elec. Spec:	36WGS719	CD Diagram:	CD0005
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	36K201	Layout:	36LYK201
Frame:	184TC	Mounting:	F1	Poles:	04	Created Date:	06-04-2012
Base:	RG	Rotation:	R	Insulation:	H	Eff. Date:	09-21-2016
Leads:	9#16					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1608L

CAT NO	IDCSWDM3615T									
SPEC.	36K201S719G1									
FRAME	184TC				HP	5	TE			
VOLTS	230/460									
MAG CUR	5.8/2.9					FLA	13/6.5			
RPM	1750				RPM MAX	6000				
HZ	60			PH	3	CLASS	H			
SER.F.	1.00			DES	B		SL HZ	1.7		
NEMA-NOM-EFF	89.5				WK2	0.428				
BLWR V			PH		HZ		A			
RATING	40C AMB-CONT									
DE BRG	6206			ODE BRG	6205					
CC	010A		SN							

Parts List		
Part Number	Description	Quantity
SA245911	SA 36K201S719G1	1.000 EA
RA232796	RA 36K201S719G1	1.000 EA
36FN3000A01SP	EXFN, PLASTIC, 7.00 OD, .912 ID	1.000 EA
36CB2000A06MU	CONDUIT BOX, MACH W/.75 NPT, BALL BURNIS	1.000 EA
37GS3011	1/8"WHITE NEOPRENE BOX GS	1.000 EA
10XN2520A08	1/4-20X1/2 HEX HEAD CAP	2.000 EA
HA5027A04	HA4054 T-DRAIN X2 BAGGED	1.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
HW3001B02	BRASS CUP WASHER W/GROUND SYMBOL TAB,	1.000 EA
36EP3101B27MU	FR EP,205 BRG-ENCL, (FOR S.P. #9D)	1.000 EA
HW4500A33	1/8 NPT STAINLESS,HOLO-KROME #13002,PRES	3.000 EA
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 EA
36EP3301A32MU	PU EP,182-4TC 206 BRG OIL SEAL NO GSR-BA	1.000 EA
HW4500A33	1/8 NPT STAINLESS,HOLO-KROME #13002,PRES	3.000 EA
10XN2520S28	1/4-20X 1 3/4 HEX HD SS X	4.000 EA
HA1049A02	DUBO LOK WASHER SIZE 1/4 (NYLON LOCK SEA	4.000 EA
HA1049A02	DUBO LOK WASHER SIZE 1/4 (NYLON LOCK SEA	4.000 EA
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 EA
36FH4011	WASHDOWN FAN COVER #304 STAINLESS W/NOTC	1.000 EA
11XB1016S07	10-16X7/16HX WS SLD TYP BTDR 13817	3.000 EA
36CB4517	LIPPED CB LID #304 STAINLESS - CLEANED	1.000 EA
37GS3010	1/16"WHITE LID GASKET	1.000 EA
59XW0832S07	TAPTITE II,HEX WSHR UNSLTD SER,410 S.S.,	4.000 EA
HW4600B32SP	V-RING SLINGER 1.000 X 1.540 X .24 VITON	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
HW4606A03	JM CLIPPER/SEAL (LWE-1156-1875-AL44)	1.000 EA
HW2502E16	#303 SS,SQ KEY 1/4 X 1.750	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
MJ5001A02	732 CL SEALANT 3 OZ DIXIE BEARING 289100	0.001 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
LB1164	LABEL,WARNING AND DRAIN	1.000 EA
HW3200S01	EYEBOLT 3/8-16 X3/4 S.S. TDR #35988	1.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
LB1115N	LABEL,LIFTING DEVICE (ON ROLLS)	1.000 EA
HA3101S40	THRUBOLT 1/4-20 X 12.687	4.000 EA
LC0145B01	CONNECTION LABEL	1.000 EA
NP1608L	SS WD INV UL CSA CC REV MTG	1.000 EA
36PA1001	PKG GRP, PRINT PK1017A06	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1000/bx) 11/14	1.000 EA

AC Induction Motor Performance Data

Page 1 of 1



AC Induction Motor Performance Data
 Record # 38663
 Typical performance - not guaranteed values

Winding: 36WGS719	Type: 3646M	Enclosure: TEFC
--------------------------	--------------------	------------------------


Nameplate Data			General Characteristics at 460 V, 60 Hz: High Volt Connection				
Rated Output (HP)	5		Full Load Torque	15.2 LB-FT			
Volts	230/460		Start Configuration	DOL			
Full Load Amps	13/6.5		Break Down Torque	49.7 LB-FT			
R.P.M.	1750		Pull-Up Torque	27.7 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque	32.3 LB-FT		
NEMA Design Code	B	KVA Code	J	Starting Current	48.3 Amps		
Service Factor	1			No-load Current	2.91 Amps		
NEMA Nom. Eff.	89.5	P.F.	81	Line-line Res. @ 25°C.	2.3457 Ohms		
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	87°C		
S.F. Amps				Temp. Rise @ S.F. Load			


Load Characteristics at 460 Volts, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	42	64	75	81	83	84	
Efficiency	86.6	90.5	90.7	89.8	88.4	86.5	
Speed	1788.2	1775.9	1762.8	1747.9	1731.9	1713.7	
Line Amperes	3.27	4.1	5.2	6.49	8.02	9.69	

Baldor Electric Company Fort Smith, Arkansas



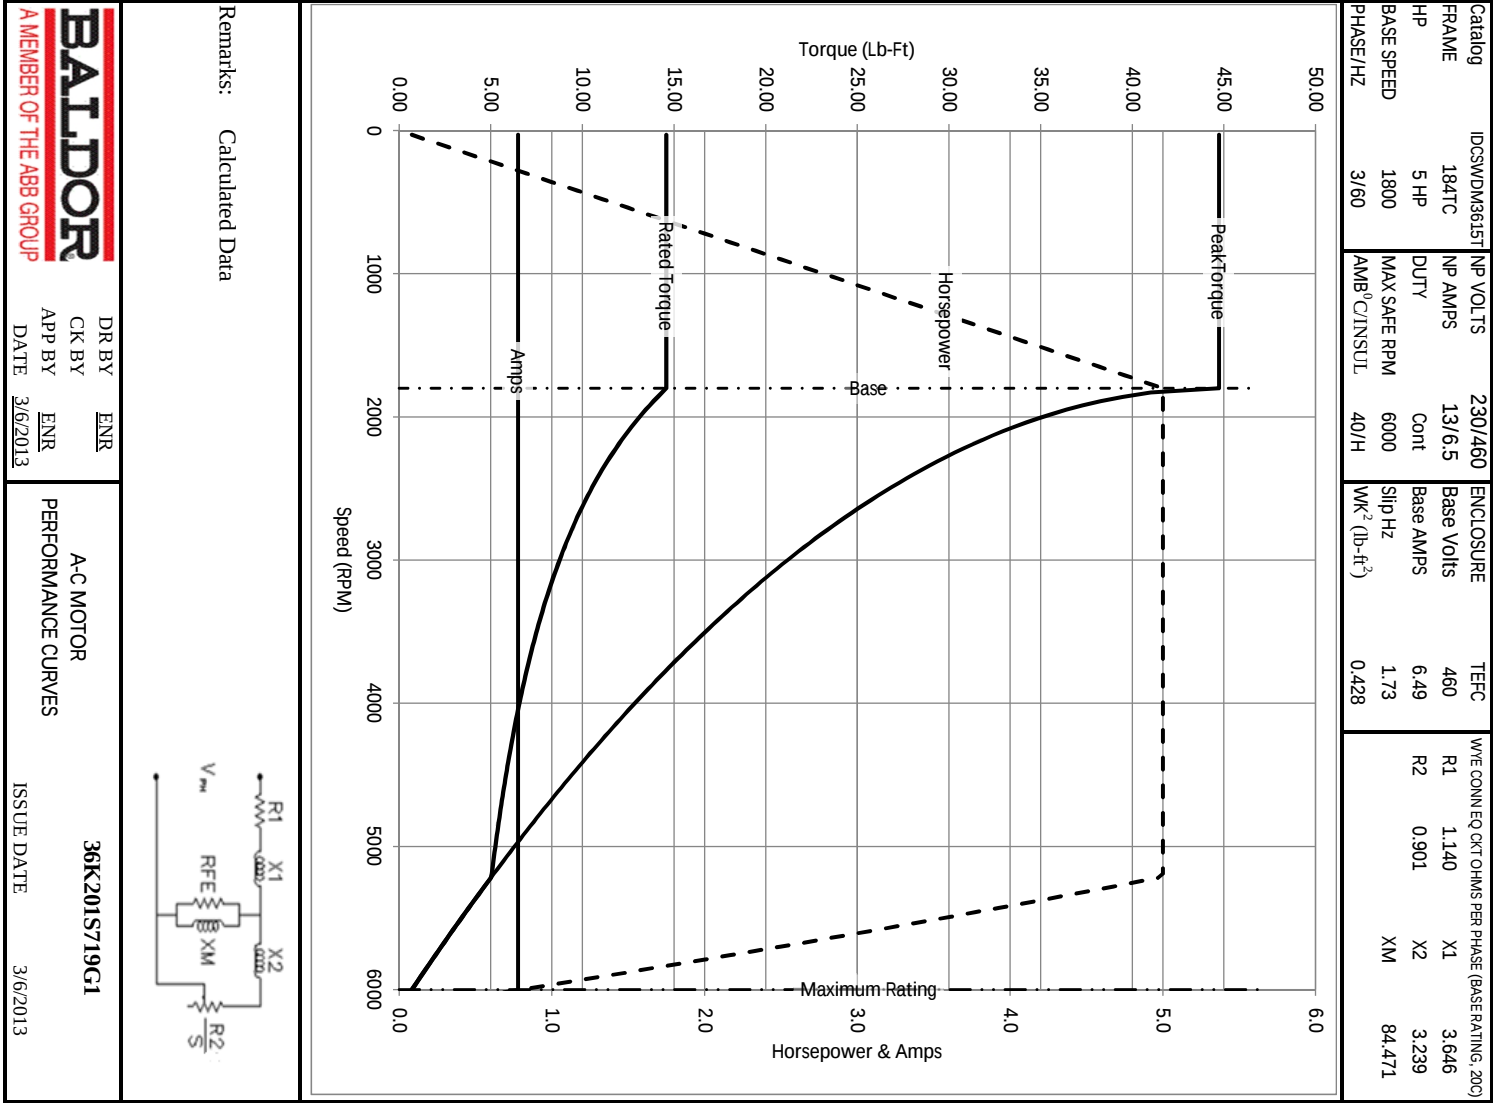


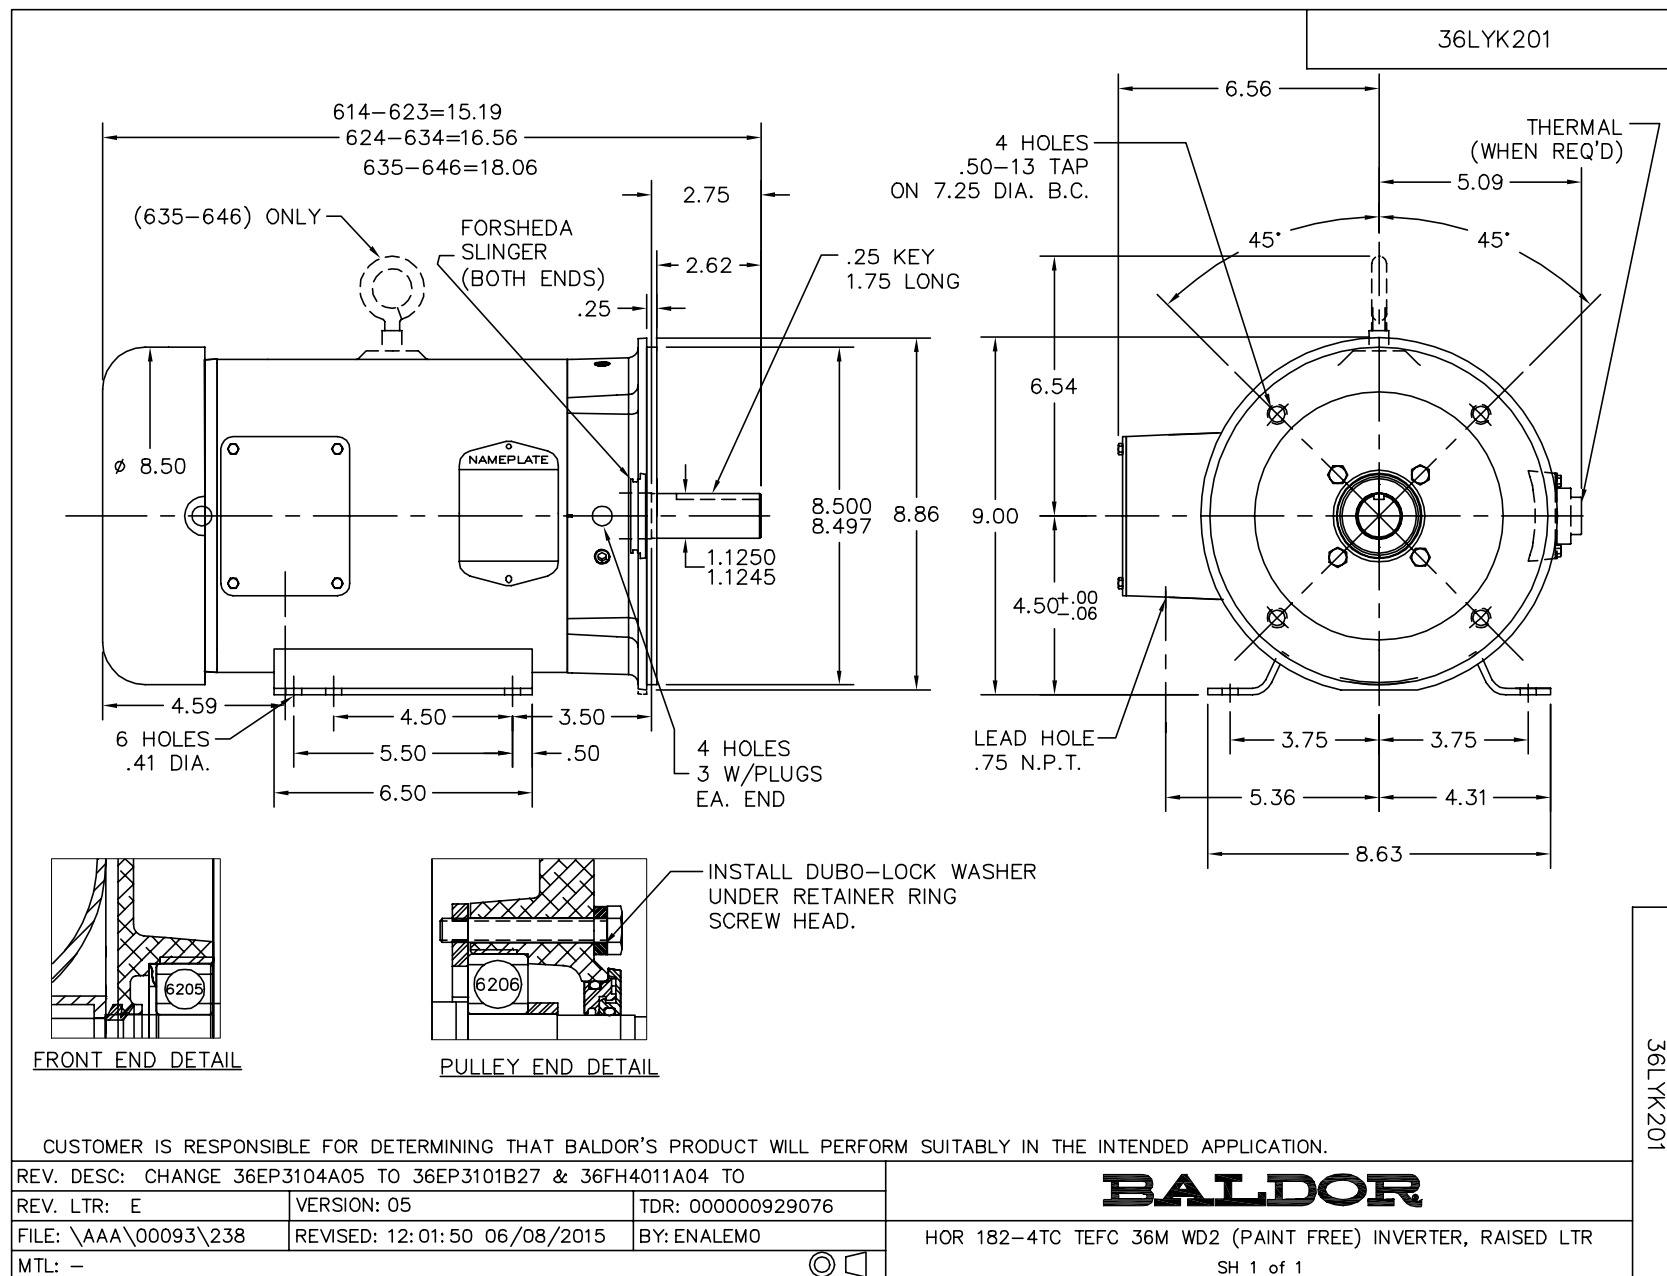

CD0005

LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

9000D0

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005