

BALDOR® • RELIANCE

Product Information Packet

M7003A

.33HP,1140RPM,3PH,60HZ,56,X3512M,XPFC,F1

Part Detail							
Revision:	AL	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3512M	Elec. Spec:	35WGZ008	CD Diagram:	CD0007
Enclosure:	XPFC	Mfg Plant:		Mech. Spec:	35E354	Layout:	35LYE354
Frame:	56	Mounting:	F1	Poles:	06	Created Date:	
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	01-05-2017
Leads:	12#18					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP0016XPSL

NO.		CC	
SER.			
SPEC.	35E354Z08		
CAT.NO.	M7003A		
HP	.33	T. CODE	T4
VOLTS	208-230/460		
AMPS	1.7-1.6/.8		
RPM	1140		
HZ	60	PH	3
SER.F.	1.00	DES	B
RATING	40C AMB-CONT		
FRAME	56	CL	B
USABLE AT 208V		CODE	K
BLANK		PF	57
		NEMA-NOM-EFF	70

Parts List		
Part Number	Description	Quantity
SA023897	SA 35E354Z08	1.000 EA
RA019947	RA 35E354Z08	1.000 EA
TPMYJ74KX	THERMAL 3PH 0.75 AUT 120C	1.000 EA
35CB3001A01SP	EXPL CONDUIT BOX, MACH, 1/2" PIPE TAP LE	1.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
HW3001B01	BRASS CUP WASHER, FOR #8 SCREW	1.000 EA
35EP3700A01SP	FR ENDPLATE, XPFC	1.000 EA
HW5100A03	WAVY WASHER (W1543-017)	1.000 EA
35EP3701A01	PU ENDPLATE, XPFC - 205 BRG	1.000 EA
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 EA
35FN3002A05SP	EXFN, PLASTIC, 6.376 OD, .638 ID	1.000 EA
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
35CB3500A01SP	CONDUIT BOX LID, MACH	1.000 EA
51XN2520A16	SCREW, HEX WS SLT, ZN, 1/4-20 X 1.00	4.000 EA
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	6.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
35FH4005A01SP	IEC FH NO GREASER W/PRIMED	1.000 EA
MG1025G29	WILKOFASST, 789.229, DARK CHARCOAL GRAY	0.017 GA
NP0018F	ALUM UL XP CONDUIT BOX NAMEPLATE	1.000 EA
NS2500A06	INSULATOR,AUTO THER PROT,W/PSA ON 1 SIDE	1.000 EA
HA6001A01	THERMAL RETAINER (PLATED)	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
12XF0632A06	6-32X3/8 TY F HEX HD SLT	2.000 EA
HA3104A06	THRUBOLT 5/16-18 X 8.50 OHIO ROD	4.000 EA
LB1118	LABEL,WARNING (ROLL LABEL)	1.000 EA
LC0007	CONNECTION LABEL	1.000 EA
NP0016XPSL	SS XP UL CSA CC CL-I GP-D CL-II GP-F&G	1.000 EA
36PA1000	PKG GRP, PRINT PK1016A06	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1000/bx) 11/14	1.000 EA

AC Induction Motor Performance Data

Record # 10398 - Typical performance - not guaranteed values

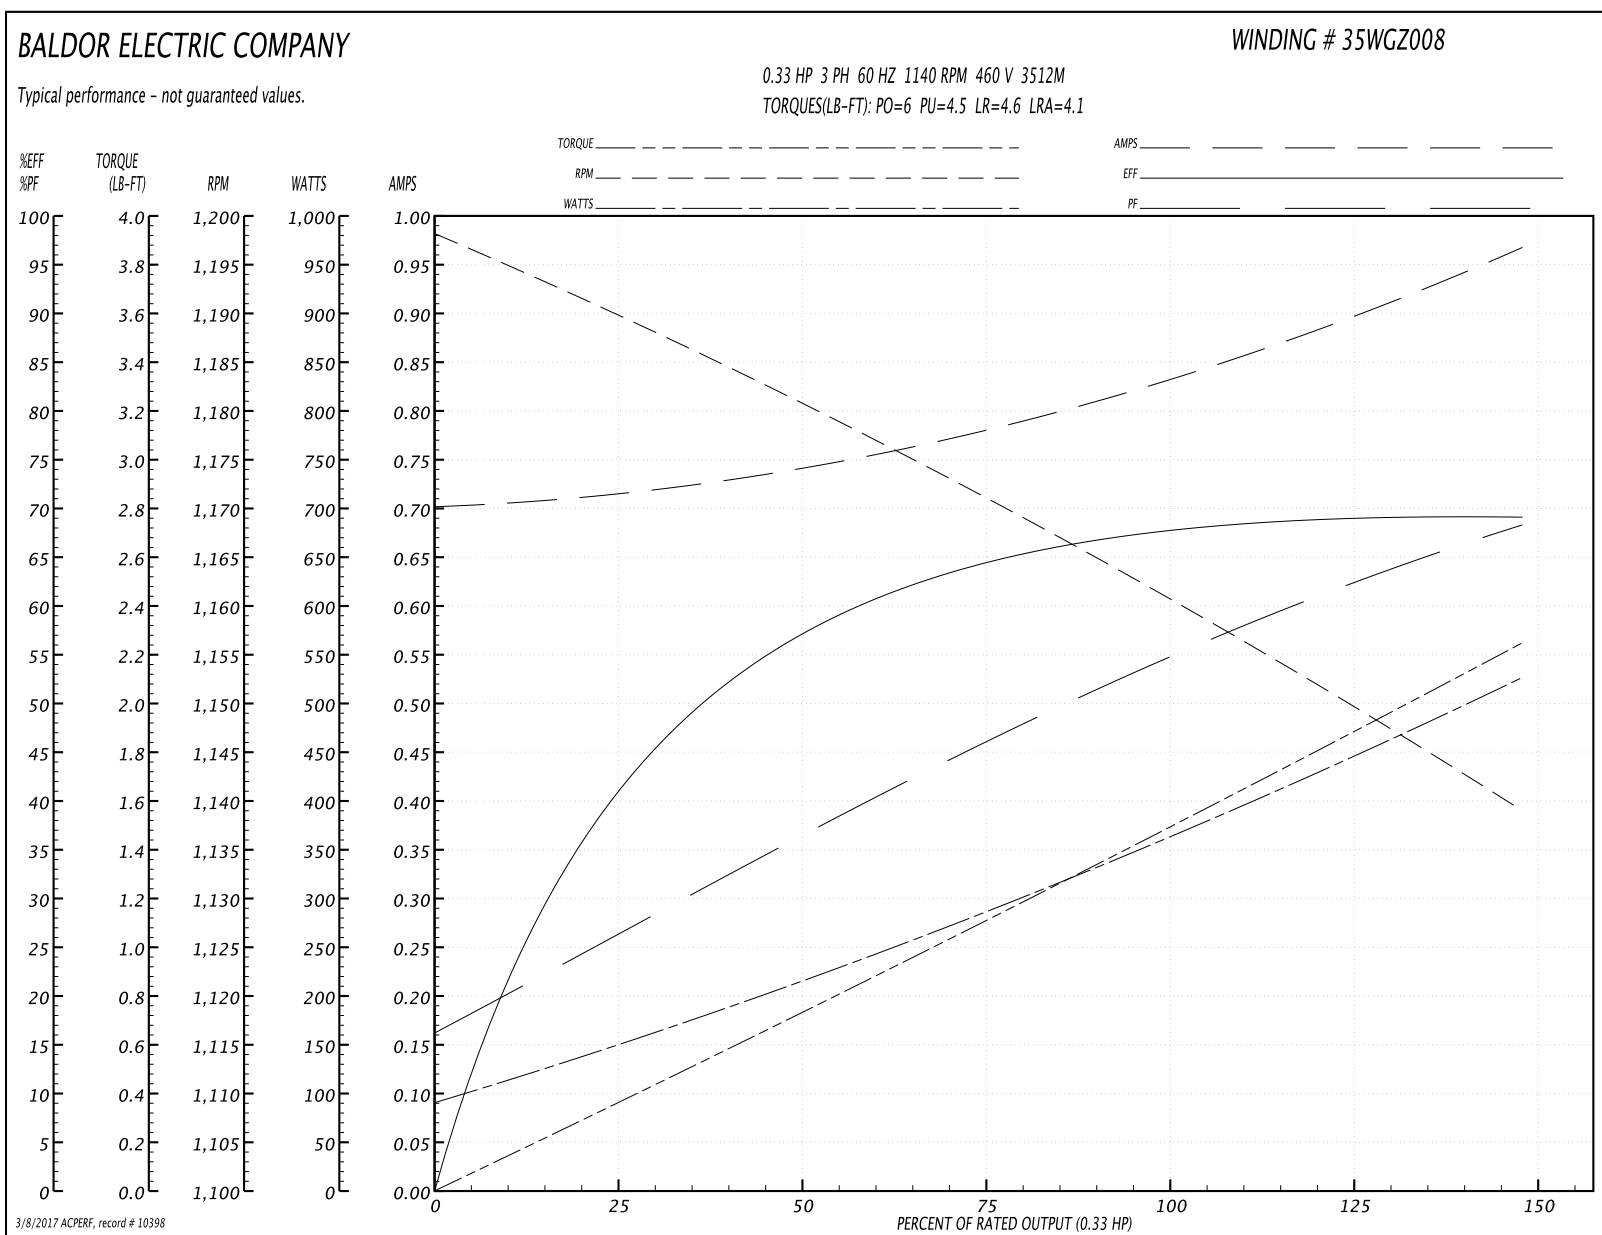
Winding: 35WGZ008-R002	Type: 3512M	Enclosure: XPFC
-------------------------------	--------------------	------------------------

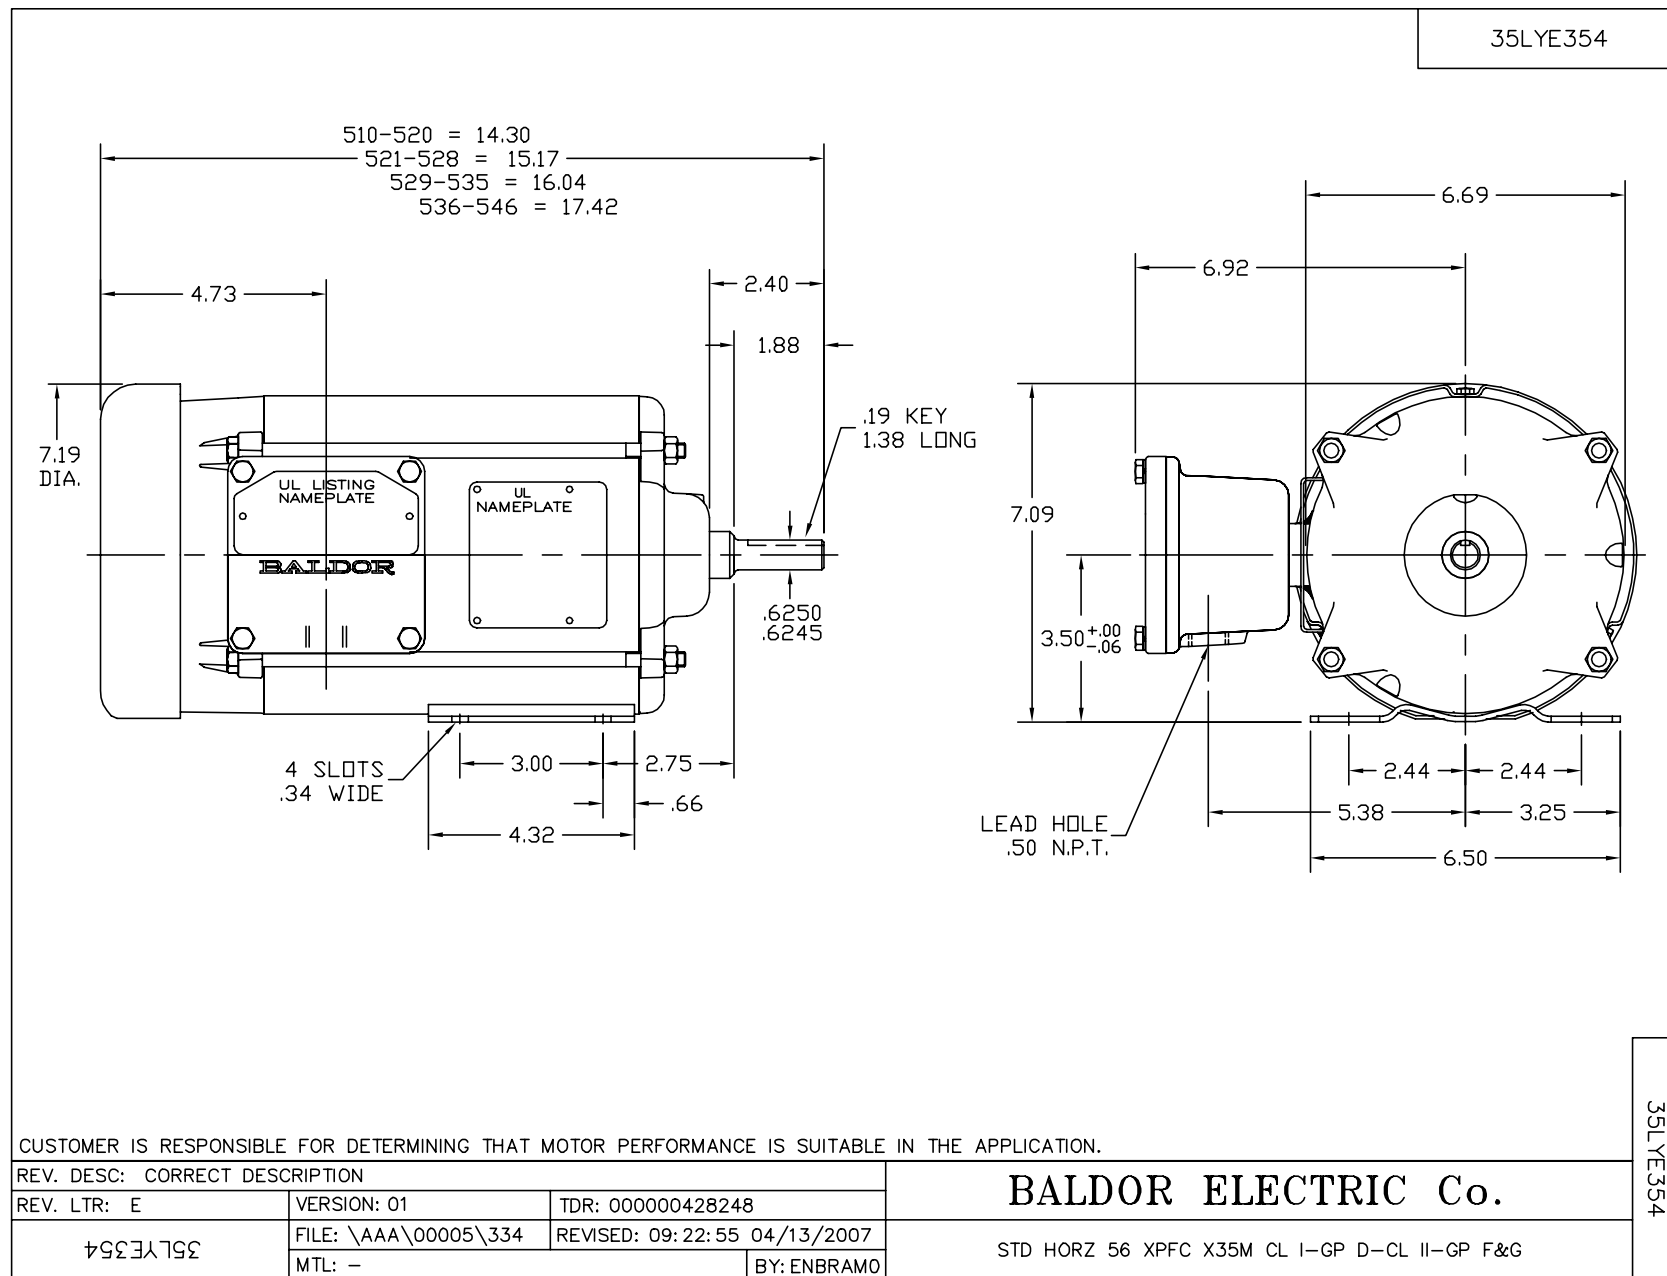
Nameplate Data				460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	.33			Full Load Torque	1.5 LB-FT
Volts	208-230/460			Start Configuration	direct on line
Full Load Amps	1.7-1.6/.8			Breakdown Torque	6 LB-FT
R.P.M.	1140			Pull-up Torque	4.5 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	4.6 LB-FT
NEMA Design Code	B	KVA Code	K	Starting Current	4.1 A
Service Factor (S.F.)	1			No-load Current	0.7 A
NEMA Nom. Eff.	70	Power Factor	57	Line-line Res. @ 25°C	56.6 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	32°C
				Locked-rotor Power Factor	72.4
				Rotor inertia	0.0712 LB-FT ²

Load Characteristics 460 V, 60 Hz, 0.33 HP

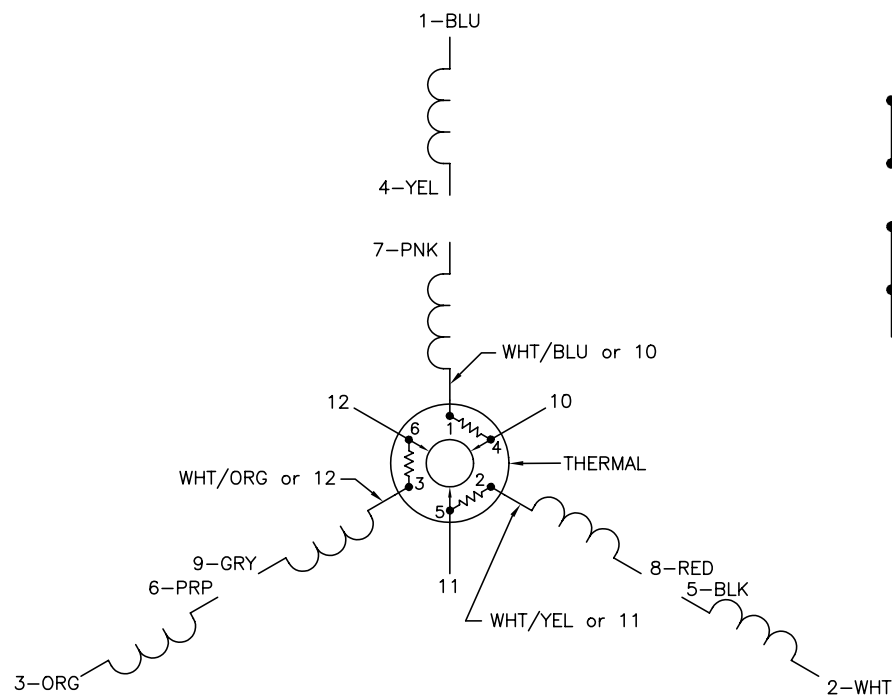

% of Rated Load	25	50	75	100	125	150
Power Factor	27	37	47	54	63	68
Efficiency	40.9	58	64.4	68.1	69.2	69
Speed	1190	1180	1171	1160	1150	1139
Line amperes	0.72	0.74	0.78	0.84	0.89	0.97

Performance Graph at 460V, 60Hz, 0.33HP Typical performance - Not guaranteed values






CD0007


 LOW VOLTAGE
(2Y)


LINE

 HIGH VOLTAGE
(1Y)


LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADDED "CK" PLANT CODE

REV. LTR: E

BY: EAH

REVISED: 05/06/99 17:1

TDR: 0181040

200000

FILE: AAA00008370

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, THERMAL, 12 LEADS

CD0007