


AIR ADVANCE, SPRING RETURN HYDRAULIC WORK SUPPORT

Capacity: 2100 lbs. At 5000 PSI

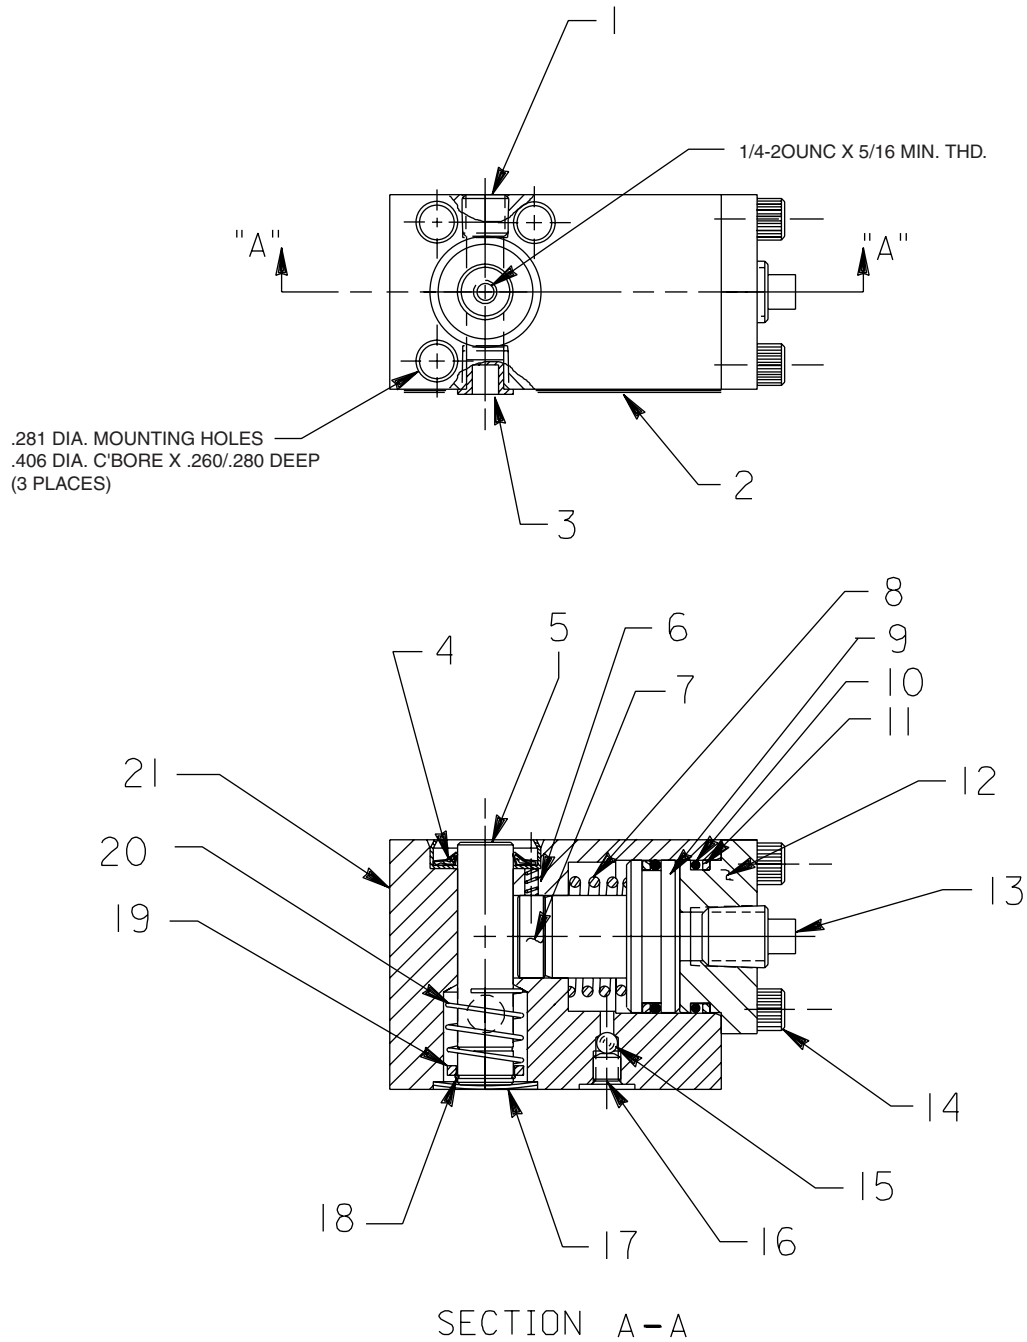

Item No.	Part No.	No. Req'd	Description
1	15499	1	Pipe Level Seal Plug (1/8 NPTF)
2	250142	1	Trade Name Decal (For 100176)
	253163	1	Trade Name Decal (For 110086)
3	15697	1	Plastic Plug
4	*206322	1	Shaft Oil Seal (Note seal direction)
5	39439	1	Plunger
6	206439	1	Compression Spring (.120 O.D. x .310 Lg.)
7	206318	1	Shim
8	253059	1	Compression Spring (1" O.D. x .67 Lg.)
9	201878	1	Piston
10	*10914	2	O-ring (1-3/8 x 1-3/16 x 3/32)
11	*19177	2	Backup Washer (1-3/8 x 1-3/16 x 3/32)
12	201875	1	End Cap (For 100176)
	351040	1	End Cap (For 110086)
13	10970	1	Pipe Plug (1/4 NPTF)
14	10006	4	Soc. Hd. Cap Screw (1/4-20 x 5/8 Lg.; Torque to 140/160 in. lbs.)
15	12223	1	Metallic Ball (3/16 dia.)
16	10136	1	Hex. Soc. Set Screw - Flat Point (1/4-20 UNC x 1/4 Lg.)
17	*205644	1	Expansion Plug (7/8 dia.; Must fit flush or below surface.)
18	11887	1	Retaining Ring
19	205643	1	Wrought Washer
20	205649	1	Compression Spring (.730 x .654 x 1.530 Lg.)
21	420033	1	Work Support Body

Part numbers marked with an asterisk (*) are contained in Repair Kit No. 300579.

See Hytec catalog for operational details.

Air pressure operating pressure: 25 - 50 PSI

Note: Some air leakage between the plunger and the seal may occur within this range.

Note: Shaded areas reflect last revision(s) made to this form.
--