



Flange Mounting Bracket

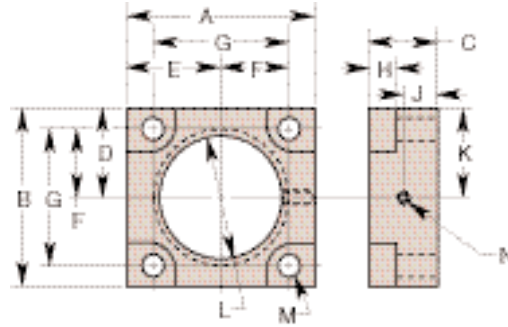

Hytec's flange mounting brackets allow you to secure your swing/pull clamps in two ways. You may use the setscrew and nylon thread protector ball (supplied) or simply lock the clamp using an optional jam nut.

Jam Nut

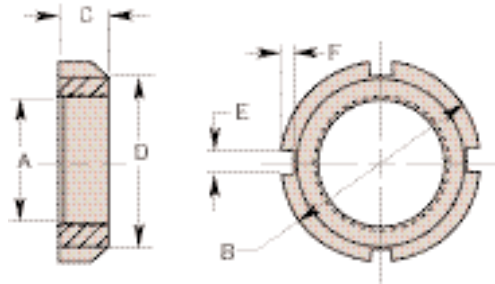

FLANGE MOUNTING BRACKETS													
Cat. No.	Dimensions (In Inches)												
	A	B	C	D	E	F	G	H	J	K	L Thread Size	M Dia.	N Thread Size
100979	1.593	1.500	.500	.750	.750	.560	1.120	.200	.250	.750	1 $\frac{1}{8}$ -16 UNC	.222	$\frac{1}{4}$ -20 UNC
100127	1.875	1.750		.875	.938	.703	1.406			.875	1 $\frac{1}{4}$ -12 UNF	.219	
110187	2.062	2.000	.750	1.000	1.031	.780	1.560	.210	.375	1.000	1 $\frac{1}{2}$ -16 UN	.281	
100114	2.750	2.500	1.000	1.250	1.375	1.000	2.000	.265	.500	1.250	1 $\frac{1}{2}$ -16 UN	.281	
100914	3.500	3.250	1.250	1.625	1.750	1.250	2.500	.500	.625	1.625	2 $\frac{1}{2}$ -16 UN	.406	

NOTE: Includes locking set screw and nylon ball to protect clamp threads.

JAM NUTS						
Cat. No.	Dimensions (In Inches)					
	A Thread Size	B Dia.	C	D	E	F
100980	1 $\frac{1}{8}$ -16 UN	1.500	.310	—	.240	.100
100916	1 $\frac{1}{4}$ -12 UNF	2.000	.500	1.688	.250	.138
100910	1 $\frac{1}{4}$ -16 UN			1.938		
110188	1 $\frac{1}{2}$ -16 UN	2.250		2.438		
100911	1 $\frac{1}{2}$ -16 UN	2.750		2.875	.312	.169
100912	2 $\frac{1}{4}$ -16 UN	3.250	.625	3.125		
100913	2 $\frac{1}{2}$ -16 UN	3.500				