



Threaded Body Cylinders


Foot Mounting Bracket

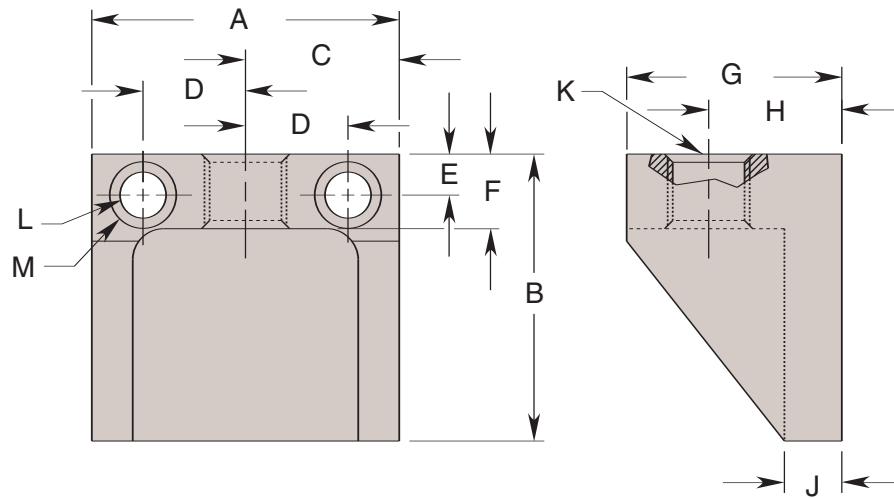

Jam Nut

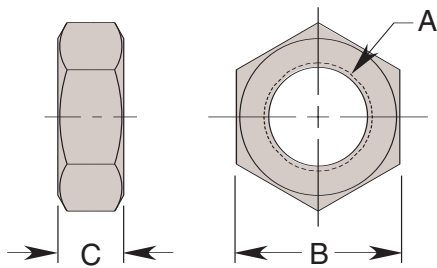

Feeder Cap

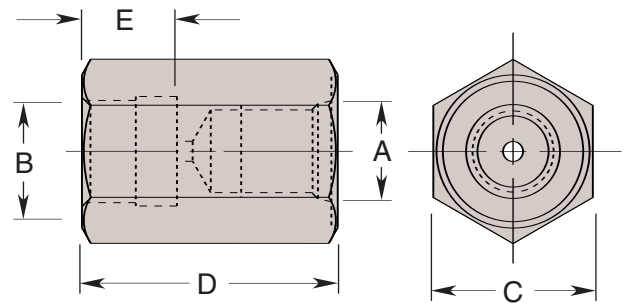

FOOT MOUNTING BRACKETS

FOOT MOUNTING BRACKETS													
Cat. No.	Dimensions (In Inches)												
	A	B	C	D	E	F	G	H	J	K Thread Size	L Dia.	M	
												Dia.	Depth
400000	1.875	1.750	.938	.625	.250	.455	1.312	.812	.350	½-13 UNC	.281	.410	.218
400001	2.000	1.875	1.000		.312	.562	1.625	.938	.312	¾-11 UNC	.359	.504	.406
400002		2.000		.656	.344	.687	1.687	1.062	.375	¾-10 UNC	.422	.598	.343
400003	2.500	2.500	1.250	.812	.375	.750	2.000	1.182		1-12 UNF			

JAM NUTS

Cat. No.	Dimensions (In Inches)		
	A Thread Size	B Hex.	C
10391	½-13UNC	.750	.312
10390	½-20UNF	.750	.312
10395	⅝-11UNC	.938	.375
10394	⅝-18UNF	.938	.375
10397	¾-10UNC	1.125	.422
10396	¾-16UNF	1.125	.422
201029	1-12UNF	1.500	.562
216207	1 ⅝-16UN	2.000	.719

FEEDER CAPS

FEEDER CAPS							
SAE Ports		NPT Ports		Dimensions (In Inches)			
Cat. No.	A Thread Size	Cat. No.	A Thread Size	B Thread Size	C Hex.	D	E
100927	7/16-20UNF SAE-4	500097	1/8-NTPF	1/2-20UNF	0.750	1.200	0.437
100928		500100		1/2-13UNC			
100929		500098	1/4-NTPF	5/8-18UNF	0.875	1.390	0.500
100930		500101		5/8-11UNC			
100931		500099		3/4-16UNF	1.000		
100932		500102		3/4-10UNC			
100933		500103		1-12UNF	1.250		

NOTE: 5,000 psi max. operating pressure.