



Cylinder Threaded Inserts


Pointed Threaded Insert
(500161, 500164)

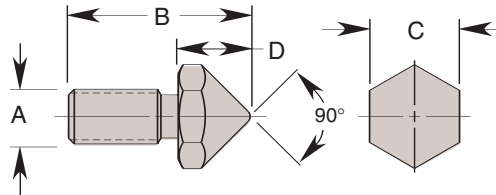

Toggle Pad Threaded Insert
(500162, 500165)

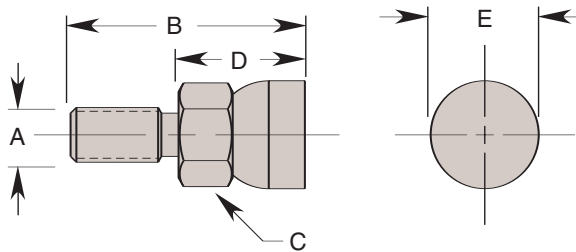

Crowned Threaded Insert
(500160, 500163, 201884)

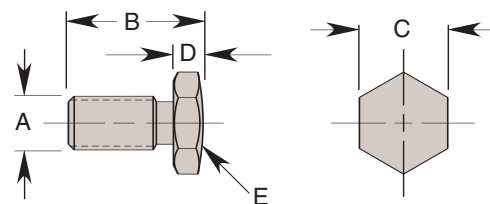

POINTED THREADED INSERTS						
Cat. No.	Dimensions (In Inches)					
	Used With Cat. No.	A Thread Size	B	C Hex.	D	
500161	100139, 100148, 100149, 100153, 100159, 100166, 100167, 100171	10-32 UNF	.630	.312	.250	
500164	100172, 100173, 100208, 100043B, 100044B, 100049B, 100050B, 100055B, 100056B, 100061B, 100062B	5/16-24 UNF	.630	.375	.250	

TOGGLE PAD THREADED INSERTS						
Cat. No.	Dimensions (In Inches)					
	Used With Cat. No.	A Thread Size	B	C Hex.	D	E Dia.
500162	100139, 100148, 100149, 100153, 100159, 100166, 100167, 100171	10-32 UNF	.812	.312	.438	.375
500165	100172, 100173, 100208, 100043B, 100044B, 100049B, 100050B, 100055B, 100056B, 100061B, 100062B	5/16-24 UNF	1.156	.563	.750	.688

CROWNED THREADED INSERTS						
Cat. No.	Dimensions (In Inches)					
	Used With Cat. No.	A Thread Size	B	C Hex.	D	E Radius
500160	100139, 100148, 100149, 100153, 100159, 100166, 100167, 100171	10-32 UNF	.480	.312	.100	.875
500163	100172, 100173, 100208, 100043B, 100044B, 100049B, 100050B, 100055B, 100056B, 100061B, 100062B	5/16-24 UNF	.480	.375	.100	.875
201884	100226, 100141, 100844, 100847, 100926	1/2-13 UNC	1.315	.750	.190	1.500