


## Cross

Compression Tube


| Cat. No. | Dimensions (In Inches) |       |      |      |             |
|----------|------------------------|-------|------|------|-------------|
|          | A                      | B     | C    | D    | E Tube Size |
| 15058    | 2.156                  | 1.078 | .750 | .750 | .250        |
| 17278    | 2.781                  | 1.391 | .953 | .750 | .375        |



## Union Tee

Compression Tube


| Cat. No. | Dimensions (In Inches) |       |      |      |             |
|----------|------------------------|-------|------|------|-------------|
|          | A                      | B     | C    | D    | E Tube Size |
| 15054    | 2.156                  | 1.078 | .750 | .438 | .250        |
| 10659    | 2.844                  | 1.422 | .984 | .625 | .375        |



## Male Run Tee

Compression Tube to NPTF


| Cat. No. | Dimensions (In Inches) |       |      |       |      |               |             |
|----------|------------------------|-------|------|-------|------|---------------|-------------|
|          | A                      | B     | C    | D     | E    | F Thread Size | G Tube Size |
| 15050    | 1.859                  | 1.078 | .750 | .781  | .438 | 1/8 NPTF      | .250        |
| 205791   | 2.047                  | 1.109 | .781 | .938  | .500 | 1/4 NPTF      | .250        |
| 10669    | 2.484                  | 1.422 | .984 | 1.062 | .625 | 1/4 NPTF      | .375        |



## Male Branch Tee

Compression Tube to NPTF


| Cat. No. | Dimensions (In Inches) |       |      |       |      |               |             |
|----------|------------------------|-------|------|-------|------|---------------|-------------|
|          | A                      | B     | C    | D     | E    | F Thread Size | G Tube Size |
| 15055    | 2.156                  | 1.078 | .750 | .781  | .438 | 1/8 NPTF      | .250        |
| 205790   | 2.219                  | 1.109 | .781 | .938  | .500 | 1/4 NPTF      | .250        |
| 10670    | 2.844                  | 1.422 | .984 | 1.062 | .625 | 1/4 NPTF      | .375        |



## 90° Male Elbow

Compression Tube


| Cat. No. | Dimensions (In Inches) |       |      |      |      |             |
|----------|------------------------|-------|------|------|------|-------------|
|          | A                      | B     | C    | D    | E    | F Tube Size |
| 15059    | 1.297                  | 1.078 | .750 | .219 | .438 | .250        |
| 250211   | 1.641                  | 1.359 | .922 | .281 | .562 | .375        |



## 90° Male Elbow

Compression Tube to NPTF


| Cat. No. | Dimensions (In Inches) |       |      |      |       |      |               |             |
|----------|------------------------|-------|------|------|-------|------|---------------|-------------|
|          | A                      | B     | C    | D    | E     | F    | G Thread Size | H Tube Size |
| 15052    | 1.297                  | 1.078 | .750 | .219 | .781  | .438 | 1/8 NPTF      | .250        |
| 205792   | 1.484                  | 1.203 | .875 | .281 | 1.062 | .562 | 1/4 NPTF      | .250        |
| 10665    | 1.641                  | 1.359 | .922 | .281 | 1.094 | .562 | 1/4 NPTF      | .375        |



## 45° Male Elbow

Compression Tube to NPTF


| Cat. No. | Dimensions (In Inches) |      |      |      |       |      |      |                |                |
|----------|------------------------|------|------|------|-------|------|------|----------------|----------------|
|          | A                      | B    | C    | D    | E     | F    | G    | H<br>Tube Size | J<br>Thd. Size |
| 15053    | .953                   | .625 | .672 | .281 | 1.359 | .688 | .562 | .250           | 1/8 NPTF       |
| 10655    | 1.234                  | .797 | .828 | .281 | 1.708 | .875 | .562 | .375           | 1/4 NPTF       |



## Male Union

Compression Tube


| Cat. No. | Dimensions (In Inches) |       |        |             |
|----------|------------------------|-------|--------|-------------|
|          | A                      | B     | C Hex. | D Tube Size |
| 15060    | 1.562                  | .906  | .500   | .250        |
| 250212   | 1.875                  | 1.000 | .625   | .375        |



## Male Connector

Compression Tube to NPTF


| Cat. No. | Dimensions (In Inches) |       |        |             |               |
|----------|------------------------|-------|--------|-------------|---------------|
|          | A                      | B     | C Hex. | D Tube Size | E Thread Size |
| 15061    | 1.281                  | .953  | .500   | .250        | 1/8 NPTF      |
| 205793   | 1.484                  | 1.156 | .625   | .250        | 1/4 NPTF      |
| 10661    | 1.641                  | 1.203 | .625   | .375        | 1/4 NPTF      |



## Tube Sleeve

| Cat. No. | A Tube Size | Fitting Style |
|----------|-------------|---------------|
| 13031    | .250        | Compression   |
| 10430    | .375        |               |


NOTE: Hytec tube sleeves may not be compatible with other tubing materials and grades.



## Check Valve

| Cat. No. | Dimensions (In Inches) |               |       |        |
|----------|------------------------|---------------|-------|--------|
|          | A Thread Size          | B Thread Size | C     | D Hex. |
| 206330   | 1/4 NPTF               | 1/4 NPTF      | 2.250 | .750   |


NOTE: Cracking pressure - 5 psi max.

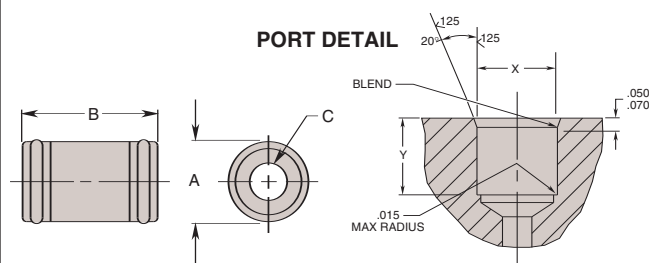

## Connector Bushing

| Cat. No. | Dimensions (In Inches) |      |        |              |              |
|----------|------------------------|------|--------|--------------|--------------|
|          | Bushings               |      |        | Port         |              |
|          | A Dia.                 | B    | C Dia. | X Dia.       | Y            |
| *100169  | .500                   | .844 | .234   | .500<br>.503 | .515<br>.535 |


NOTE: \* Box of Ten Connector Bushings.



## Swivel Adapter

**Caution** - The female swivel end is a straight pipe thread (NPSM) with a 30° seat. All male pipe fittings that are used with these female swivel adapters must have an internal 30° seat to seal properly.


| Cat. No. | Dimensions (In Inches) |               |               |
|----------|------------------------|---------------|---------------|
|          | A                      | B Thread Size | C Thread Size |
| 15069    | 1.030                  | 1/4 NPTF      | 1/8 NPSM      |
| 11310    | 1.260                  | 1/4 NPTF      | 1/4 NPSM      |



## Reducer

NPTF

| Cat. No. | Dimensions (In Inches) |               |        |      |
|----------|------------------------|---------------|--------|------|
|          | A Thread Size          | B Thread Size | C Hex. | D    |
| 13269    | 1/4 NPTF               | 1/8 NPTF      | .625   | .781 |




## Adapter

NPTF

| Cat. No. | Dimensions (In Inches) |                  |       |        |
|----------|------------------------|------------------|-------|--------|
|          | A Thread Size          | B Thread Size    | C     | D Hex. |
| 15235    | 1/8 NPTF               | 1/4 NPTF         | 1.140 | .750   |
| *252128  | 1/4 NPTF               | 7/16 20UNF SAE-4 | 1.310 | .688   |


\* Use with 216437 Metering Valve to control flow in 1/4 NPTF actuators.



## Plug

NPTF


| Cat. No. | PLUGS - NPTF           |      |        |
|----------|------------------------|------|--------|
|          | Dimensions (In Inches) |      |        |
|          | A Thread Size          | B    | C Hex. |
| 15499    | 1/8 NPTF               | .242 | .188   |
| 10479    | 1/4 NPTF               | .437 | .250   |
| 16232    | 3/8 NPTF               | .400 | .312   |



## Plug


SAE O-Ring

| Cat. No. | PLUGS - SAE O-RING     |      |      |        |        |
|----------|------------------------|------|------|--------|--------|
|          | Dimensions (In Inches) |      |      |        |        |
|          | A Thread Size          | B    | C    | D Hex. | E Dia. |
| 250883   | 7/16-20UNF SAE-4       | .450 | .360 | .188   | .563   |



**Connector**  
NPTF


| Cat. No. | Dimensions (In Inches) |               |        |        |       |
|----------|------------------------|---------------|--------|--------|-------|
|          | A Thread Size          | B Thread Size | C Hex. | D Dia. | E     |
| 12740    | 1/4 NPTF               | 1/4 NPTF      | .750   | .730   | 1.125 |

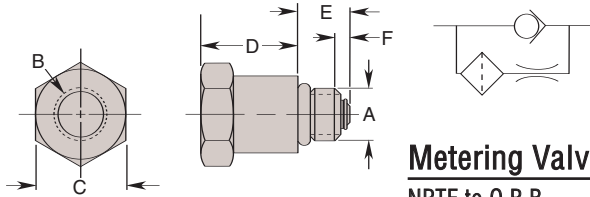

**Metering Valve**  
NPTF to O.R.B.


| Cat. No. | Dimensions (In Inches) |               |        |      |      |      |
|----------|------------------------|---------------|--------|------|------|------|
|          | A Thread Size          | B Thread Size | C Hex. | D    | E    | F    |
| 216437   | 7/16-20UNF SAE-4       | 1/4 NPTF      | .750   | .700 | .435 | .075 |

NOTE: Orifice size - .013/.017 dia.




**Male Connector**  
O.R.B. to Compression Tube

| Cat. No. | Dimensions (In Inches) |       |       |        |      |             |
|----------|------------------------|-------|-------|--------|------|-------------|
|          | A Thread Size          | B     | C     | D Hex. | E    | F Tube Size |
| 250685   | 7/16-20 UNF SAE-4      | 1.203 | .875  | .562   | .359 | .250        |
| 250686   | 9/16-18 UNF SAE-6      | 1.453 | 1.016 | .812   | .391 | .375        |




**90° Male Elbow**  
Compression Tube to O.R.B.

| Cat. No. | Dimensions (In Inches) |       |      |      |       |       |      |                   |             |
|----------|------------------------|-------|------|------|-------|-------|------|-------------------|-------------|
|          | A                      | B     | C    | D    | E     | F     | G    | H Thread Size     | J Tube Size |
| 250687   | 1.297                  | 1.078 | .219 | .750 | 1.266 | 1.078 | .438 | 7/16-20 UNF SAE-4 | .250        |
| 250688   | 1.625                  | 1.344 | .281 | .906 | 1.516 | 1.250 | .562 | 9/16-18 UNF SAE-6 | .375        |



**Male Branch Tee**  
Compression Tube to O.R.B.


| Cat. No. | Dimensions (In Inches) |       |      |       |      |                   |             |
|----------|------------------------|-------|------|-------|------|-------------------|-------------|
|          | A                      | B     | C    | D     | E    | F Thread Size     | G Tube Size |
| 250689   | 2.156                  | 1.078 | .750 | 1.047 | .438 | 7/16-20 UNF SAE-4 | .250        |



**90° Swivel Adapter**


**Caution** - The female swivel end is a straight pipe thread (NPSM) with a 30° seat. All male pipe fittings that are used with these female swivel adapters must have an internal 30° seat to seal properly.

| Cat. No. | Dimensions (In Inches) |               |       |      |
|----------|------------------------|---------------|-------|------|
|          | A Thread Size          | B Thread Size | C     | D    |
| 250692   | 7/16-20 UNF SAE-4      | 1/4 NPSM      | 1.120 | .970 |



**Male Adapter**  
O.R.B. to NPTF


| Cat. No. | Dimensions (In Inches) |               |       |        |      |
|----------|------------------------|---------------|-------|--------|------|
|          | A Thread Size          | B Thread Size | C     | D Hex. | E    |
| 210312   | 7/16-20 UNF SAE-4      | 1/4 NPTF      | 1.062 | .750   | .710 |



**Swivel Adapter**

**Caution** - The female swivel end is a straight pipe thread (NPSM) with a 30° seat. All male pipe fittings that are used with these female swivel adapters must have an internal 30° seat to seal properly.


| Cat. No. | Dimensions (In Inches) |               |       |      |
|----------|------------------------|---------------|-------|------|
|          | A Thread Size          | B Thread Size | C     | D    |
| 250690   | 7/16-20 UNF SAE-4      | 1/4 NPSM      | 1.320 | .865 |

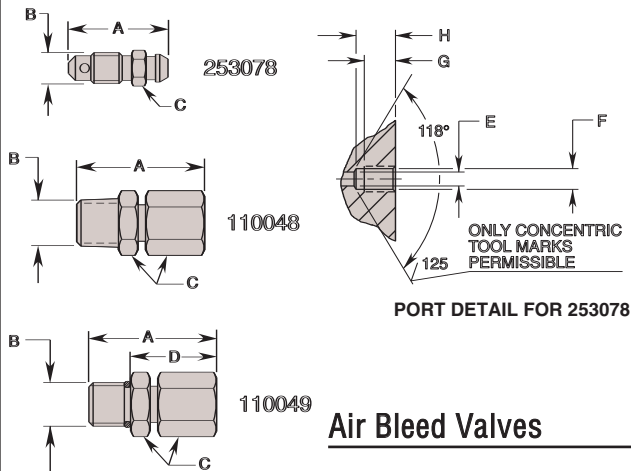

PORT DETAIL FOR 253078


## Air Bleed Valves

| Cat. No. | Dimensions (In Inches) |                  |       |       |             |               |        |              |
|----------|------------------------|------------------|-------|-------|-------------|---------------|--------|--------------|
|          | A                      | B Thread Size    | C Hex | D     | E Dia. Max. | F Thread Size | G Min. | H            |
| 253078   | 1.000                  | 1/16-24UNF       | .312  | —     | .177        | 1/16-24UNF    | .350   | .450<br>.510 |
| 110048   | 1.630                  | 1/4 NPTF         | .562  | —     | —           | —             | —      | —            |
| 110049   | 1.440                  | 1/16-20UNF SAE-4 | .562  | 1.080 | —           | —             | —      | —            |




251827

## Accumulator Metering Valves




252586

| Cat. No. | Dimensions (In Inches) |             |             |              |       |
|----------|------------------------|-------------|-------------|--------------|-------|
|          | A                      | B Thd. Size | C Thd. Dia. | D Dia.       | D Hex |
| 251827   | .698                   | 1/16-18 UNF | 1/4 NPT     | —            | .750  |
| 252586   | .544                   | —           | —           | .624<br>.622 | —     |

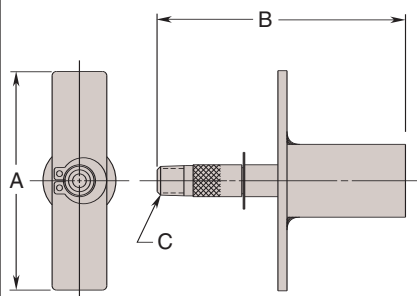

## Accumulator Charging Tool


| Cat. No. | Dimension (In Inches) |       |               |
|----------|-----------------------|-------|---------------|
|          | A                     | B     | C Thread Size |
| 500149   | 3.000                 | 3.400 | 1/8 NPTF      |



## Straight

37° Flared Tube to NPTF


| Cat. No. | Dimensions (In Inches) |             |       |       |           |
|----------|------------------------|-------------|-------|-------|-----------|
|          | A Thd. Size            | B Thd. Size | C     | D Hex | Tube Dia. |
| 11628    | 1/16-18 UNF            | 1/4 NPTF    | 1.430 | .750  | .375      |
| 253019   | 1/16-20 UNF            | 1/4 NPTF    | 1.220 | .500  | .250      |
| 253076   | 1/16-18 UNF            | 1/4 NPTF    | 1.420 | .562  | .375      |
| 253174   | 1/16-18 UNF            | 1/4 NPTF    | 1.430 | .625  | .375      |



## Straight

NPTF


| Cat. No. | Dimensions (In Inches) |             |       |       |
|----------|------------------------|-------------|-------|-------|
|          | A Thd. Size            | B Thd. Size | C     | D Hex |
| 10672    | 1/4 NPTF               | 1/4 NPTF    | 1.450 | .625  |
| 11421    | 1/4 NPTF               | 1/4 NPTF    | 1.060 | .437  |
| 12328    | 1/4 NPTF               | 1/4 NPTF    | 1.360 | .750  |
| 16691    | 1/4 NPTF               | 1/4 NPTF    | 1.234 | .593  |
| 215373   | 1/4 NPTF               | 1/8 NPTF    | 1.010 | .438  |



## Straight

37° Flared Tube to O.R.B.


| Cat. No. | Dimensions (In Inches) |                   |       |       |           |
|----------|------------------------|-------------------|-------|-------|-----------|
|          | A Thd. Size            | B Thd. Size       | C     | D Hex | Tube Dia. |
| 253020   | 1/16-20 UNF            | 1/16-20 UNF SAE-4 | 1.230 | .562  | .250      |
| 253021   | 1/16-18 UNF            | 1/16-18 UNF SAE-6 | 1.300 | .687  | .375      |



## 90° Elbow Adapter


NPTF

| Cat. No. | Dimensions (In Inches) |             |       |      |
|----------|------------------------|-------------|-------|------|
|          | A Thd. Size            | B Thd. Size | C     | D    |
| 10617    | 1/4 NPTF               | 1/4 NPTF    | 1.090 | .880 |
| 13229    | 1/4 NPTF               | 1/4 NPTF    | .780  | .660 |
| 13864    | 1/4 NPTF               | 1/4 NPTF    | —     | .880 |




**90° Male Elbow**  
37° Flared Tube

| Cat. No. | Dimensions (In Inches) |       |           |
|----------|------------------------|-------|-----------|
|          | A Thd. Size            | B     | Tube Dia. |
| 253007   | 7/16-20 UNF            | .890  | .250      |
| 253008   | 9/16-18 UNF            | 1.060 | .375      |




**Female Tee**  
NPTF

| Cat. No. | Dimensions (In Inches) |      |
|----------|------------------------|------|
|          | A Thd. Size            | B    |
| 252998   | 1/4 NPTF               | .890 |




**90° Male Elbow**  
37° Flared Tube to NPTF

| Cat. No. | Dimensions (In Inches) |             |       |       |           |
|----------|------------------------|-------------|-------|-------|-----------|
|          | A Thd. Size            | B Thd. Size | C     | D     | Tube Dia. |
| 253009   | 7/16-20 UNF            | 1/4 NPTF    | 1.060 | 1.090 | .250      |
| 253010   | 9/16-18 UNF            | 3/8 NPTF    | 1.140 | 1.220 | .375      |
| 253175   | 7/16-20 UNF            | 1/4 NPTF    | .890  | .780  | .250      |

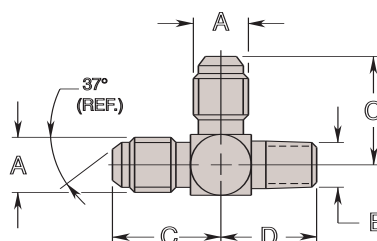


**Male Run Tee**  
37° Flared Tube to NPTF

| Cat. No. | Dimensions (In Inches) |             |       |       |           |
|----------|------------------------|-------------|-------|-------|-----------|
|          | A Thd. Size            | B Thd. Size | C     | D     | Tube Dia. |
| 253022   | 7/16-20 UNF            | 1/4 NPTF    | .890  | .780  | .250      |
| 253023   | 7/16-20 UNF            | 3/8 NPTF    | 1.060 | 1.090 | .250      |
| 253025   | 9/16-18 UNF            | 3/8 NPTF    | 1.140 | 1.220 | .375      |
| 253026   | 9/16-18 UNF            | 1/2 NPTF    | 1.140 | 1.220 | .375      |




**90° Male Elbow**  
37° Flared Tube to O.R.B.

| Cat. No. | Dimensions (In Inches) |                   |       |       |        | Tube Dia. |
|----------|------------------------|-------------------|-------|-------|--------|-----------|
|          | A Thd. Size            | B Thd. Size       | C     | D     | E Hex. |           |
| 250605   | 7/16-20 UNF            | 7/16-20 UNF SAE-4 | .890  | 1.030 | .562   | .250      |
| 253011   |                        | 9/16-18 UNF SAE-6 | 1.060 | 1.250 | .687   | .250      |
| 253012   | 9/16-18 UNF            | 3/4-16 UNF SAE-8  | 1.140 | 1.450 | .875   | .375      |
| 253013   |                        | 7/8-14 UNF SAE-10 | 1.230 | 1.700 | 1.000  | .375      |

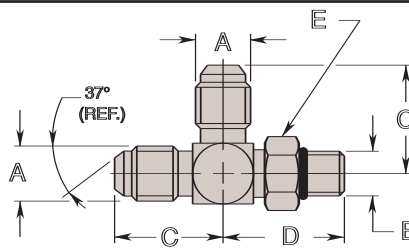


**Male Run Tee**  
37° Flared Tube to O.R.B.

| Cat. No. | Dimensions (In Inches) |                   |       |       |        | Tube Dia. |
|----------|------------------------|-------------------|-------|-------|--------|-----------|
|          | A Thd. Size            | B Thd. Size       | C     | D     | E Hex. |           |
| 253024   | 7/16-20 UNF            | 7/16-20 UNF SAE-4 | .890  | 1.030 | .562   | .250      |
| 253027   | 9/16-18 UNF            | 9/16-18 UNF SAE-6 | 1.060 | 1.250 | .687   | .375      |

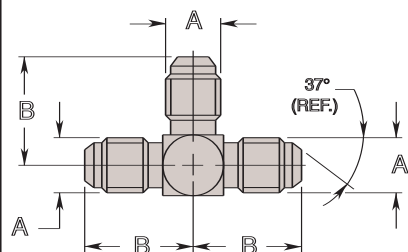

**Male Tee**  
37° Flared Tube


| Cat. No. | Dimensions (In Inches) |       |           |
|----------|------------------------|-------|-----------|
|          | A Thd. Size            | B     | Tube Dia. |
| 252996   | 7/16-20 UNF            | .890  | .250      |
| 252997   | 9/16-18 UNF            | 1.060 | .375      |

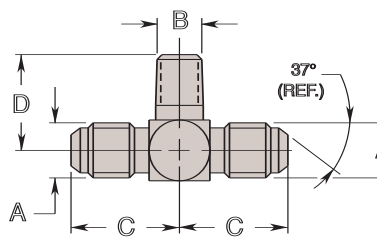

**Male Branch Tee**  
37° Flared Tube to NPTF


| Cat. No. | Dimensions (In Inches) |             |       |       |           |
|----------|------------------------|-------------|-------|-------|-----------|
|          | A Thd. Size            | B Thd. Size | C     | D     | Tube Dia. |
| 253028   | 7/16-20 UNF            | 1/4 NPTF    | .890  | .780  | .250      |
| 253030   | 9/16-18 UNF            | 1/4 NPTF    | 1.060 | 1.090 | .375      |

# Fittings

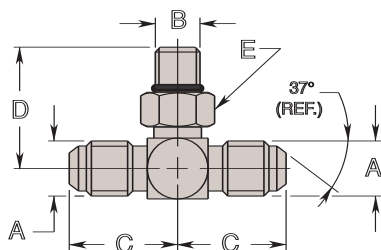


**Male Branch Tee**  
37° Flared Tube to O.R.B.

| Cat. No. | Dimensions (In Inches) |                    |       |       |        |           |
|----------|------------------------|--------------------|-------|-------|--------|-----------|
|          | A Thd. Size            | B Thd. Size        | C     | D     | E Hex. | Tube Dia. |
| 253029   | 1/16"-20 UNF           | 1/16"-20 UNF SAE-4 | .890  | 1.030 | .562   | .250      |
| 253031   | 1/16"-18 UNF           | 1/16"-18 UNF SAE-6 | 1.060 | 1.250 | .687   | .375      |

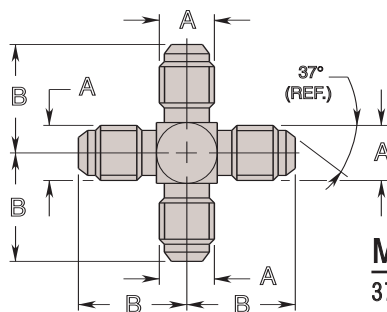


**Male Cross**  
37° Flared Tube

| Cat. No. | Dimensions (In Inches) |       |           |
|----------|------------------------|-------|-----------|
|          | A Thd. Size            | B     | Tube Dia. |
| 252999   | 1/16"-20 UNF           | .890  | .250      |
| 253000   | 1/16"-18 UNF           | 1.060 | .375      |

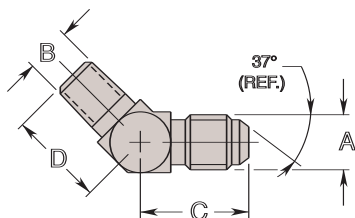


**Male 45° Elbow**  
37° Flared Tube to NPTF

| Cat. No. | Dimensions (In Inches) |             |      |      |           |
|----------|------------------------|-------------|------|------|-----------|
|          | A Thd. Size            | B Thd. Size | C    | D    | Tube Dia. |
| 253014   | 1/16"-20 UNF           | 1/4" NPTF   | .820 | .860 | .250      |
| 253016   | 1/16"-18 UNF           | 1/4" NPTF   | .840 | .860 | .375      |
| 253017   | 1/16"-18 UNF           | 3/8" NPTF   | .880 | .950 | .375      |




**Female Cross**  
NPTF

| Cat. No. | Dimensions (In Inches) |      |
|----------|------------------------|------|
|          | A Thd. Size            | B    |
| 253001   | 1/4" NPTF              | .890 |

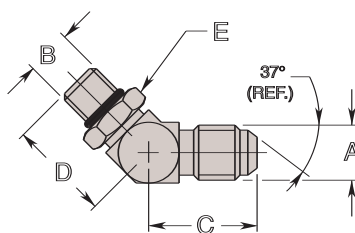


**Male 45° Elbow**  
37° Flared Tube to O.R.B.

| Cat. No. | Dimensions (In Inches) |                    |      |       |        |           |
|----------|------------------------|--------------------|------|-------|--------|-----------|
|          | A Thd. Size            | B Thd. Size        | C    | D     | E Hex. | Tube Dia. |
| 253015   | 1/16"-20 UNF           | 1/16"-20 UNF SAE-4 | .720 | 1.050 | .562   | .250      |
| 253018   | 1/16"-18 UNF           | 1/16"-18 UNF SAE-6 | .830 | 1.180 | .687   | .375      |




**Nut**  
37° Flared Tube

| Cat. No. | Dimensions (In Inches) |      |        |           |
|----------|------------------------|------|--------|-----------|
|          | A Thd. Size            | B    | C Hex. | Tube Dia. |
| 253032   | 1/16"-20 UNF           | .610 | .562   | .250      |
| 253033   | 1/16"-18 UNF           | .720 | .687   | .375      |




**Straight**  
BSPP to O.R.B.

| Cat. No. | Dimensions (In Inches) |        |                    |       |
|----------|------------------------|--------|--------------------|-------|
|          | A Thd. Size            | B Hex. | C                  | D     |
| 253288   | 1/4" BSPP              | .750   | 1/16"-20 UNF SAE-4 | 1.250 |



**45° Elbow Adapter**  
NPTF

| Cat. No. | Dimensions (In Inches) |             |      |       |
|----------|------------------------|-------------|------|-------|
|          | A Thd. Size            | B Thd. Size | C    | D     |
| 19121    | 1/4" NPTF              | 1/4" NPTF   | .470 | .720  |
| 10645    | 1/4" NPTF              | 1/4" NPTF   | .630 | 1.050 |



**Straight**  
O.R.B.

| Cat. No. | Dimensions (In Inches) |                    |       |        |
|----------|------------------------|--------------------|-------|--------|
|          | A Thd. Size            | B Thd. Size        | C     | D Hex. |
| 351816   | 1/16"-20 UNF SAE-4     | 1/16"-24 UNC SAE-2 | 1.065 | .625   |