

BALDOR® • RELIANCE

Product Information Packet

KENM3534

.33HP,1750RPM,3PH,60HZ,56C,3513M,TENV,F1

Part Detail							
Revision:	F	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3512M	Elec. Spec:	35WGN563	CD Diagram:	CD0005
Enclosure:	TENV	Mfg Plant:		Mech. Spec:	35E010	Layout:	35LYE010
Frame:	56C	Mounting:	F1	Poles:	04	Created Date:	09-17-2012
Base:	N	Rotation:	R	Insulation:	F	Eff. Date:	09-14-2016
Leads:	9#18					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP2116L

CAT.NO.	KENM3534														
SPEC.	35E010N563G1														
HP	.33														
VOLTS	230/460														
AMP	1.1/.55														
RPM	1750														
FRAME	56C				HZ				60		PH		3		
SER.F.	1.15			CODE		M		DES		B		CL		F	
NEMA-NOM-EFF	80			PF		70									
RATING	40C AMB-CONT														
CC											USABLE AT 208V				
DE	6205				ODE		6203								
ENCL	TENV			SN											

Parts List		
Part Number	Description	Quantity
SA251179	SA 35E010N563G1	1.000 EA
RA238021	RA 35E010N563G1	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB3007	35 CB CASTING W/.88 DIA. LEAD HOLE	1.000 EA
36GS1000	GASKET-CONDUIT BOX, .06 THICK #SV-330 LE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
35EP3100M69	STD FR EP-TENV-35L OR M--203 BRG	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
35EP3300A33	SPL FACE MTD EP -ENCL-205 BRG	1.000 EA
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 EA
35CB4521GX	CONDUIT BOX LID KIT	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 EA
HA3100A12	THRUBOLT 10-32 X 7.375	4.000 EA
MG1000Y03	MUNSELL 2.53Y 6.70/ 4.60, GLOSS 20,	0.017 GA
LC0005E01	CONN.DIA./WARNING LABEL (LC0005/LB1119N)	1.000 EA
NP2116L	ALUM SUPER-E UL CSA CC	1.000 EA
35PA1066	PKG GRP, PRINT PK1008A06	1.000 EA
PK3082	STYROFOAM CRADLE	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1000/bx) 11/14	1.000 EA

AC Induction Motor Performance Data

Record # 39804 - Typical performance - not guaranteed values


Winding: 35WGN563-R003	Type: 3512M	Enclosure: TENV
-------------------------------	--------------------	------------------------

Nameplate Data				460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	.33			Full Load Torque	1 LB-FT
Volts	230/460			Start Configuration	direct on line
Full Load Amps	1.1/1.55			Breakdown Torque	5.04 LB-FT
R.P.M.	1750			Pull-up Torque	2.28 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	3.29 LB-FT
NEMA Design Code	B	KVA Code	M	Starting Current	4.2 A
Service Factor (S.F.)	1.15			No-load Current	0.375 A
NEMA Nom. Eff.	80	Power Factor	70	Line-line Res. @ 25°C	51.2 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	37°C
S.F. Amps				Temp. Rise @ S.F. Load	43°C
				Locked-rotor Power Factor	68
				Rotor inertia	0.0709 LB-FT ²



Load Characteristics 460 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	30	47	61	71	78	81	74
Efficiency	66.6	77.8	81.3	82.3	82.3	81.2	80.3
Speed	1785	1772	1758	1744	1728	1710	1745
Line amperes	0.39	0.422	0.474	0.534	0.607	0.702	0.6

Performance Graph at 460V, 60Hz, 0.33HP Typical performance - Not guaranteed values

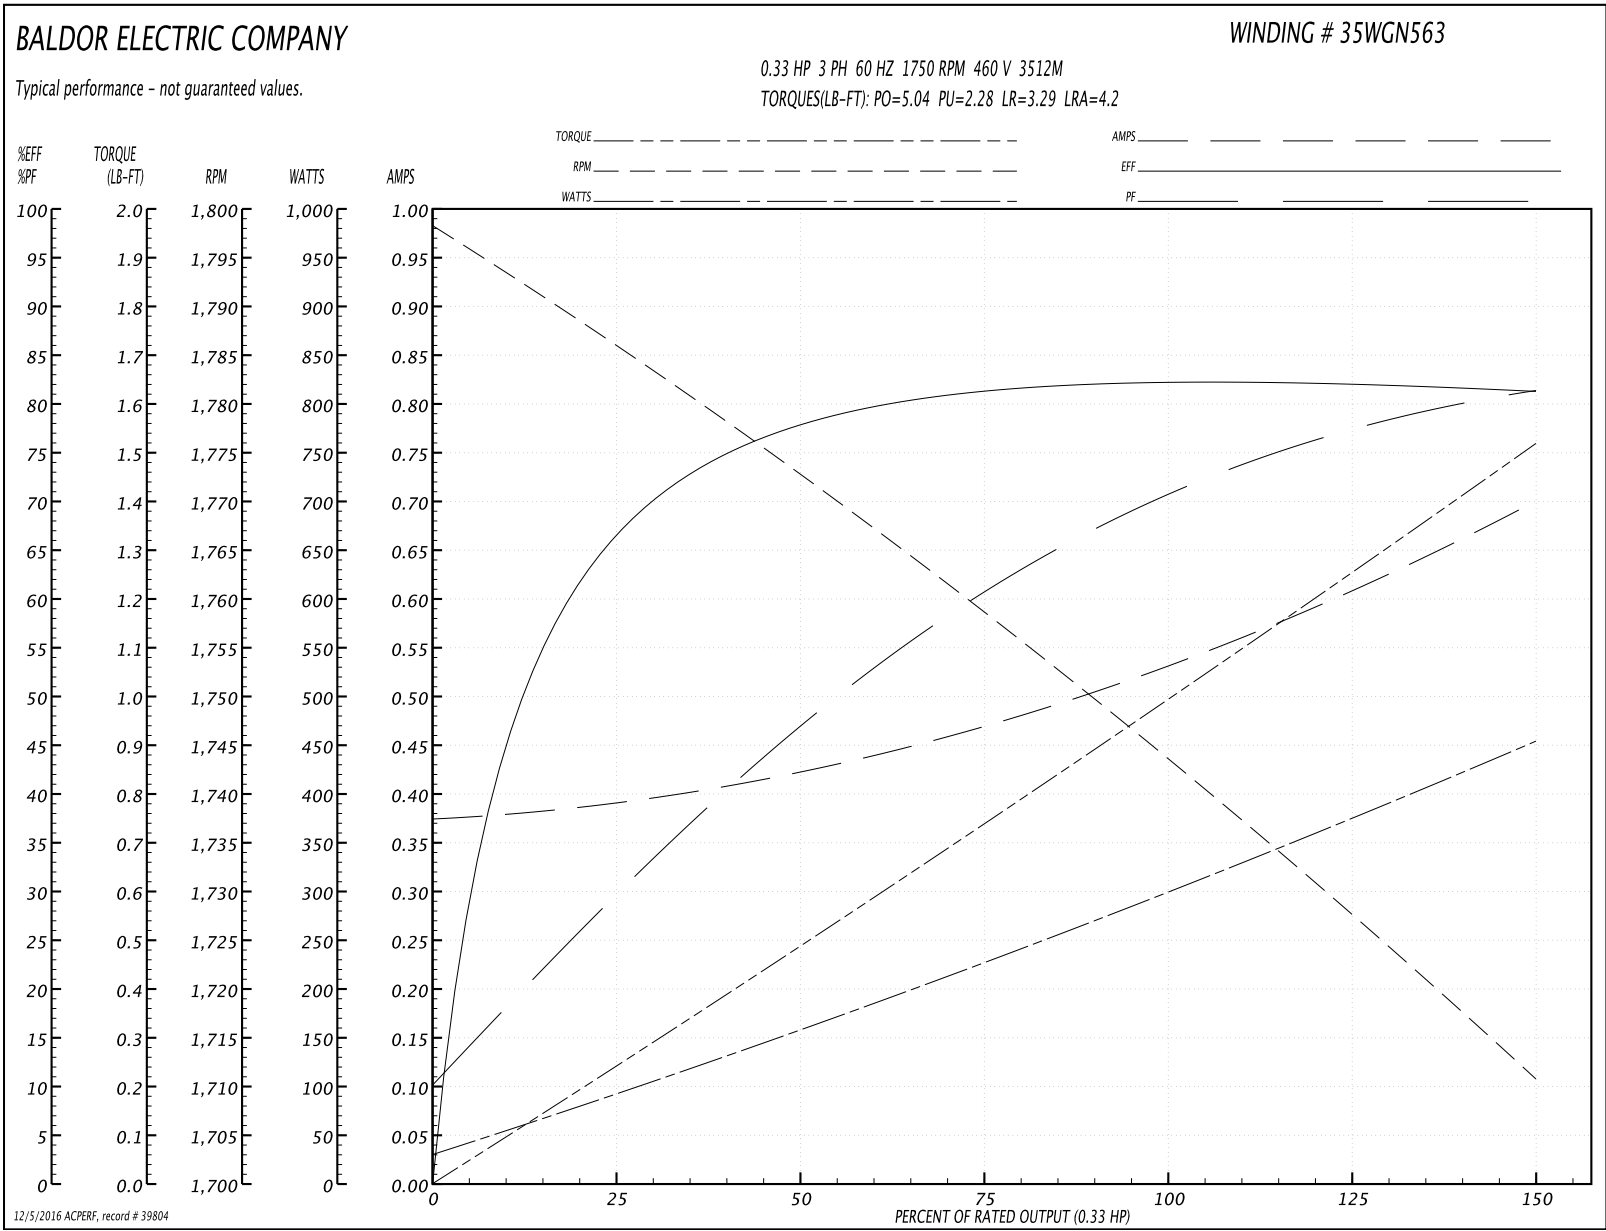

35LYE010

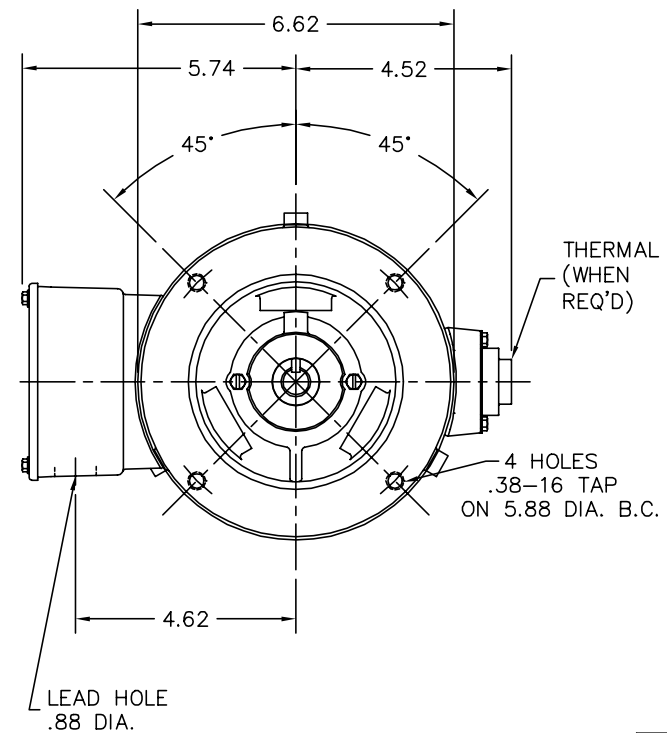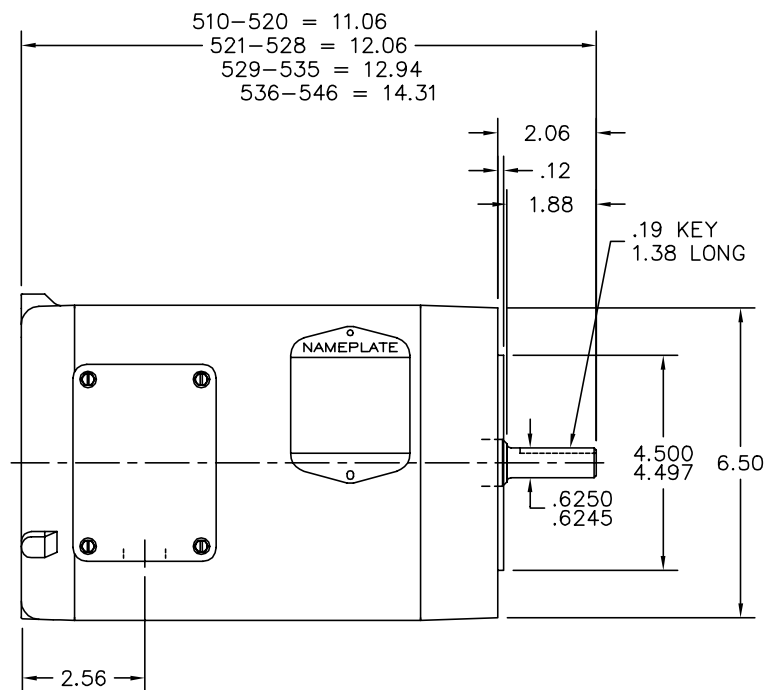

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: UPDATE KOLD GRAPHICS

REV. LTR: H

VERSION: 04

TDR: 000000486011

FILE: \AAA\00027\338

REVISED: 14:58:02 12/31/2008

MTL: -

BY: ENCHEBO



BALDOR • DODGE • RELIANCE

STD VERT 56C TENV 35M


SH 1 of 1

35LYE010

CD0005

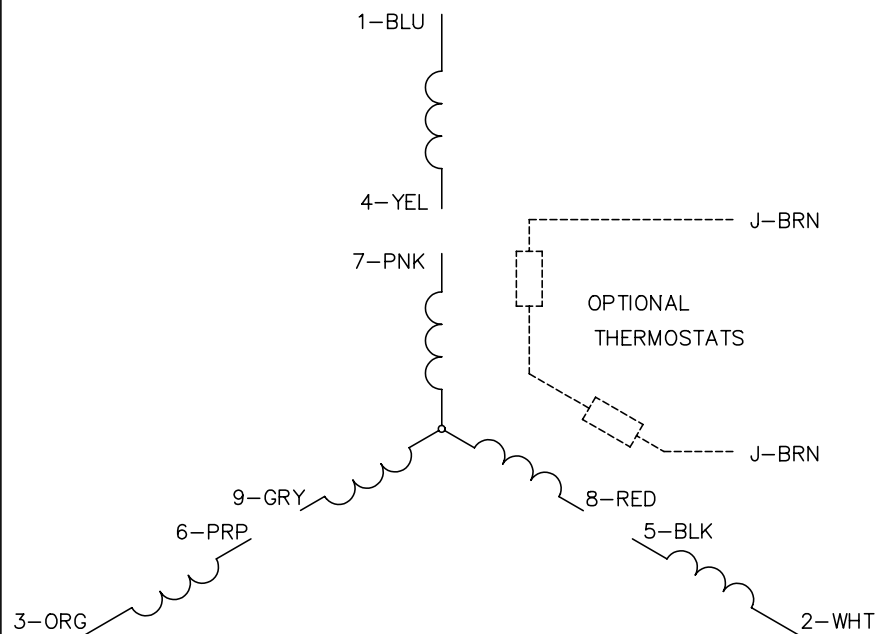LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

900000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005