

BALDOR® • RELIANCE

Product Information Packet

EM3158T-8

3HP,3450RPM,3PH,60HZ,145T,3530M,OPSB,F1

Part Detail							
Revision:	C	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3530M	Elec. Spec:	35WGN342	CD Diagram:	CD0006
Enclosure:	OPSB	Mfg Plant:		Mech. Spec:	35T680	Layout:	35LYT680
Frame:	145T	Mounting:	F1	Poles:	02	Created Date:	07-31-2015
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	11-09-2016
Leads:	3#16					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP3553L

CAT.NO.	EM3158T-8										
SPEC.	35T680N342G3										
HP	3										
VOLTS	200										
AMP	8.5										
RPM	3450										
FRAME	145T				HZ		60		PH		3
SER.F.	1.15		CODE		K	DES		B	CL		B
NEMA-NOM-EFF	85.5		PF		87						
RATING	40C AMB-CONT										
CC	010A		USABLE AT 208V								
DE	6205				ODE		6203				
ENCL	OPSB		SN								
VPWM INVERTER READY											
CT30-60(2:1) VT3-60(20:1)											

Parts List		
Part Number	Description	Quantity
SA305032	SA 35T680N342G3	1.000 EA
RA292224	RA 35T680N342G3	1.000 EA
S/P107-000-001	SUPER E PROC'S-FS, WS & CK PLTS	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB3007	35 CB CASTING W/.88 DIA. LEAD HOLE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
35EP3201A01	STD FR ENDPLATE-OPEN-203 BRG W/GREASER	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
35EP3200A01	PUEP OPEN 205 BRG W/GREASER	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
35CB4521	35 LIPPED CB LID (GALV & PHOSPH)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A01	KEY RETAINER 7/8" DIA SHAFT	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
MG1000Y03	MUNSELL 2.53Y 6.70/ 4.60, GLOSS 20,	0.017 GA
HA3100A23	THRUBOLT 10-32 X 10.375	4.000 EA
35AD2005A01	BAFFLE PLATE,MOD 35-SLTD BAND MTRS GL.F.	2.000 EA
LB1119N	WARNING LABEL	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1000/bx) 11/14	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
NP3553L	ALUM SUPER-E VPWM INVERTER READY UL	1.000 EA
LC0006	CONNECTION LABEL	1.000 EA
36PA1000	PKG GRP, PRINT PK1016A06	1.000 EA

AC Induction Motor Performance Data

Record # 52201 - Typical performance - not guaranteed values


Winding: 35WGN342-R003	Type: 3530M	Enclosure: OPSB
-------------------------------	--------------------	------------------------


Nameplate Data				200 V, 60 Hz: Single Voltage Motor	
Rated Output (HP)	3			Full Load Torque	4.5 LB-FT
Volts	200			Start Configuration	direct on line
Full Load Amps	8.5			Breakdown Torque	17.8 LB-FT
R.P.M.	3450			Pull-up Torque	11.1 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	14.8 LB-FT
NEMA Design Code	B	KVA Code	K	Starting Current	72.1 A
Service Factor (S.F.)	1.15			No-load Current	3.33 A
NEMA Nom. Eff.	85.5	Power Factor	87	Line-line Res. @ 25°C	1.03 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	32°C
S.F. Amps				Temp. Rise @ S.F. Load	38°C
				Locked-rotor Power Factor	55.2
				Rotor inertia	0.0822 LB-FT ²

Load Characteristics 200 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	52	74	84	88	91	92	90
Efficiency	77	84.5	85.9	86	85	83.3	85.4
Speed	3568	3539	3506	3473	3435	3391	3450
Line amperes	3.86	5.09	6.69	8.45	10.4	12.6	9.62

Performance Graph at 200V, 60Hz, 3.0HP Typical performance - Not guaranteed values

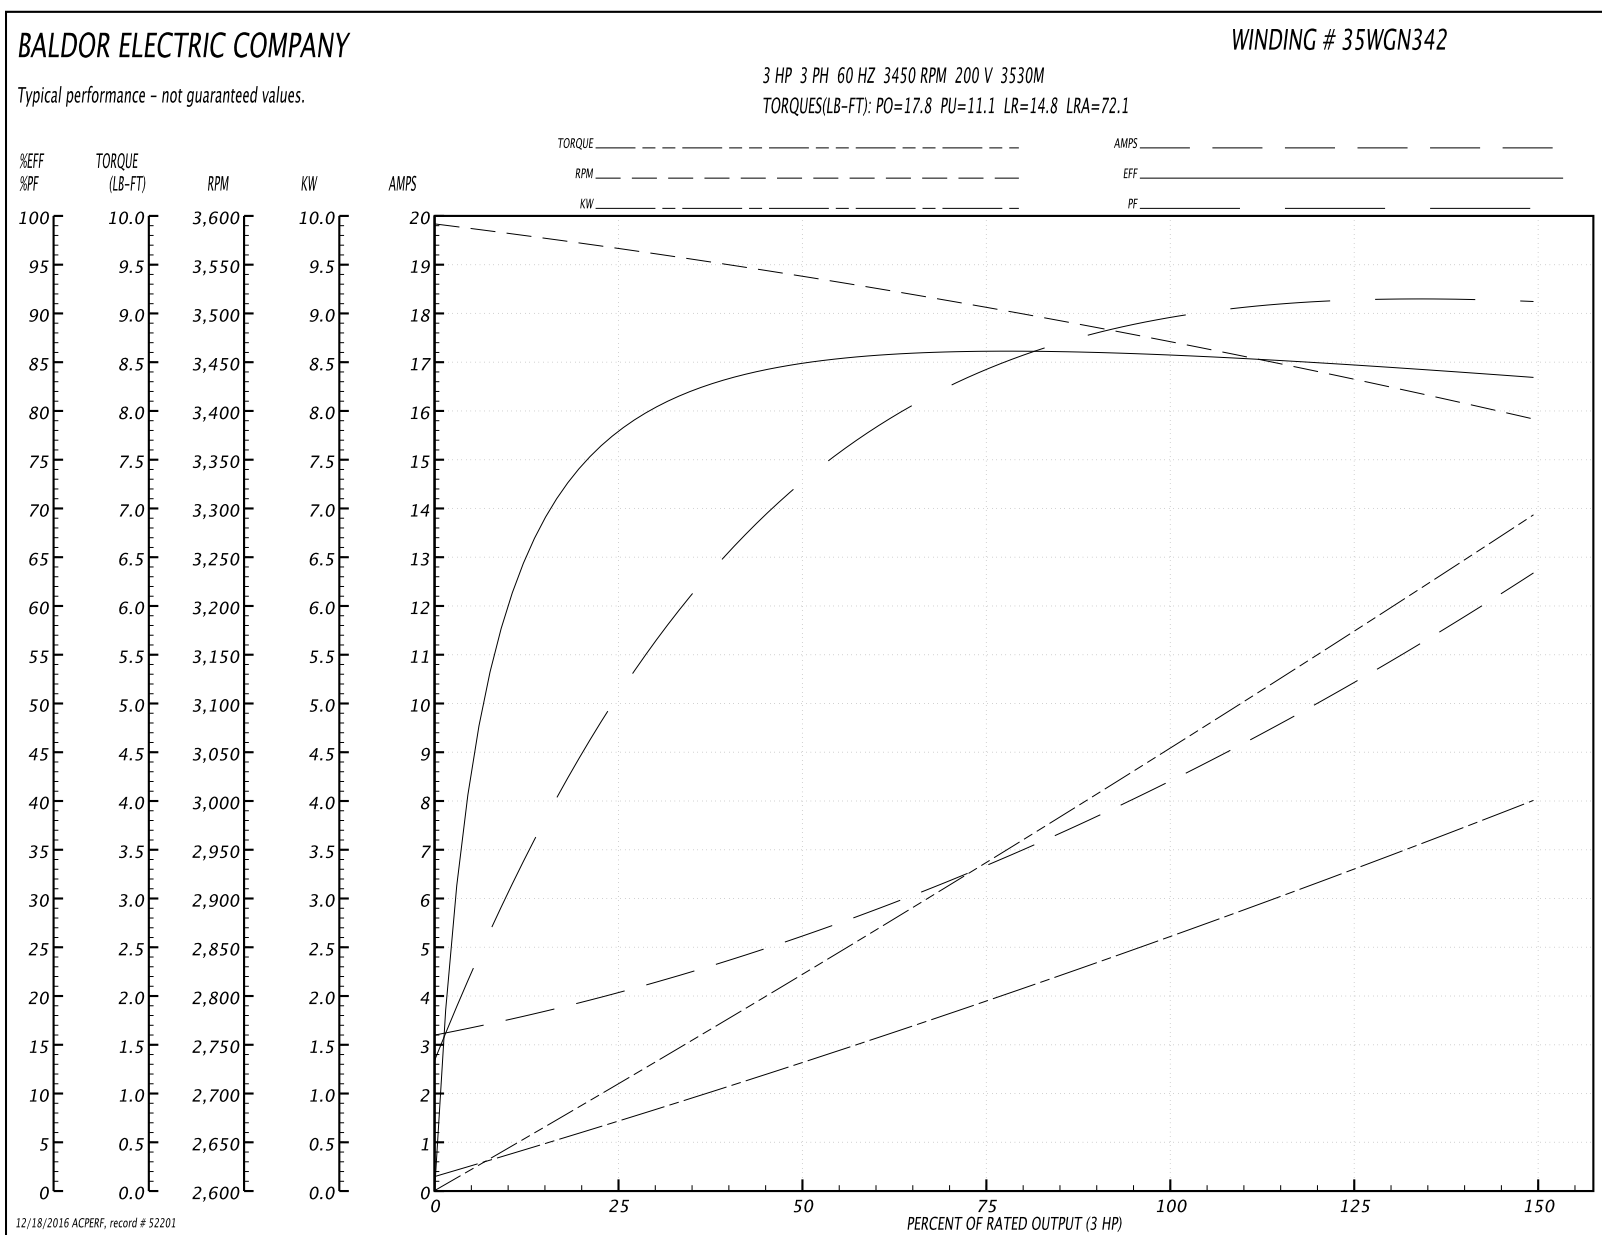

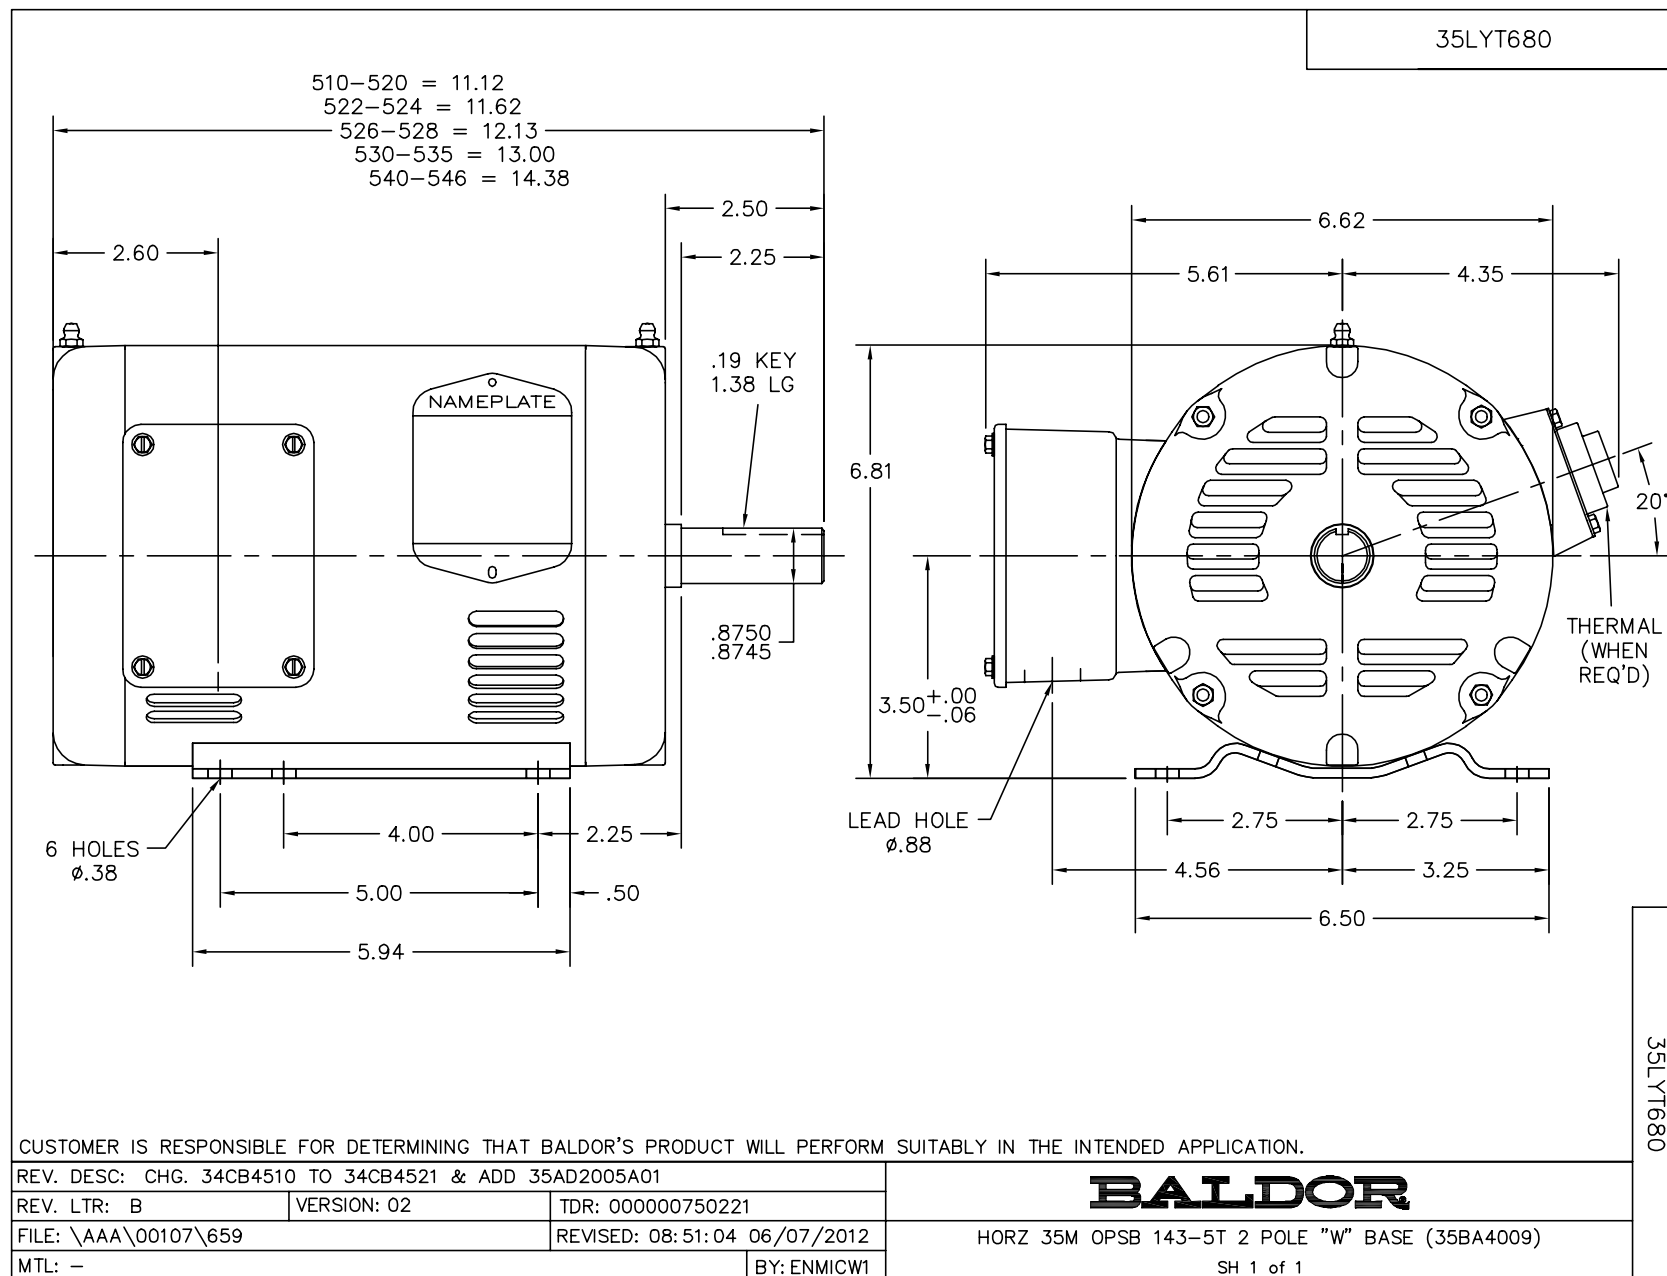

CD0006

TYPICAL WYE-CONNECTED MOTOR

1-BLU

3-ORG

2-WHT

OPTIONAL THERMOSTATS

J-BRN

J-BRN

TYPICAL DELTA-CONNECTED MOTOR

1-BLU

2-WHT

3-ORG

OPTIONAL THERMOSTATS

J-BRN

J-BRN

1

2

3

LINE

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.

2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.

3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.

4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.

5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS				BALDOR ELECTRIC Co.	
REV. LTR: D	BY: JLP	REVISED: 01/21/99 4:02	TDR: 0171435		
9000D		FILE: AAA00005141	MDL: -		
		MTL: -			

CD0006

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

Page 9 of 9

BALDOR

A MEMBER OF THE ABB GROUP