

BALDOR® • RELIANCE

Product Information Packet

CECP84312T-4

50HP,1185RPM,3PH,60HZ,365TC,A36062M,TEFC

Part Detail							
Revision:	J	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	A36062M	Elec. Spec:	A36WG0777	CD Diagram:	416820-036
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:		Layout:	617428-132
Frame:	365TC	Mounting:	F1	Poles:	06	Created Date:	11-27-2013
Base:		Rotation:	R	Insulation:	F	Eff. Date:	10-28-2016
Leads:	3#4					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP2496L		
MOBIL POLYREX EM		

Nameplate 000613007EX			
CAT NO	CECP84312T-4	SPEC NO.	A36-4048-0777
NO. ROTOR BARS	55	GREASE TYPE	POLYREX EM
NO. SLOTS	72	NL AMPS AT RATED VOLTAGE	20.8
5 YEAR WARRANTY		WINDING RES @25 C	.12973
MFG. DATE		SER.NO	

Nameplate NP3237


CAT NO	CECP84312T-4		SPEC NO.	A36-4048-0777			
HP	50	AMPS	61.7	VOLTS	460	DESIGN	B
FRAME SIZE	365TC	RPM	1185	HZ	60	AMB	40
D.E. BRG.DATA	6313	O.D.E. BRG.DATA	6313	PH	3	SF	1.15
D.E. BRG.	65BC03J30X	TYPE	P	ENCL	TEFC	CODE	F
O.D.E. BRG.	65BC03J30X	POWER FACTOR	81				
3/4 LOAD EFF.	94.4	IP	56	MAX CORR KVAR	14	NEMA-NOM-EFFICIENCY	94.1
TEMP CODE	T3A	TEMP	= 180			GUARANTEED EFFICIENCY	93
CHP HZ	60-90	CT HZ	6-60	VT HZ	0-60		
INVERTER-TEMP-CODE	T3A						
SER.NO.		MOTOR WEIGHT	908				

Parts List		
Part Number	Description	Quantity
SA272928	SA A36-4048-0777	1.000 EA
RA259533	RA A36-4048-0777	1.000 EA
421948051	LABEL, MYLAR	1.000 EA
NP2496L	MOTOR LUBE NAMEPLATE	1.000 EA
000613006PU	N/P (RELEASE QTY 10,000) UL CSA LABEL	1.000 EA
000613007EX	SS IEEE 841 EMBOSSED AUXILIARY NAMEPLATE	1.000 EA
000692000JP	N/P	1.000 EA
000692000VH	N/P	1.000 EA
000692000VD	LABEL WARNING	1.000 EA
NP3237	SS SUPER E INVERTER DUTY IEEE 841	1.000 EA
085922083BH	BRKT 360 085922072WCC KB	1.000 EA
415072001B	CLAMP	1.000 EA
078559034A	+F/C A 078559001A - 360	1.000 EA
034180012DA	KEY 1X4X1/4X1-1/2 L	1.000 EA
412118006A	DRAIN	1.000 EA
078550001M	FAN KB 60/30 (30) 360	1.000 EA
004824015A	GREASE POLYREX EM	0.540 LB
032018012DK	HHCS 1/2-13X1-1/2 PLTD.	4.000 EA
032018008AK	HHCS 1/4-20X1 PLATED	4.000 EA
032018024CK	HHCS 3/8-16X3 PLTD.	3.000 EA
415096002A	CPLG 1/8 HEX TYPE	1.000 EA
410700004F	WSHR	1.000 EA
423709011C	WASHER	3.000 EA
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 EA


Parts List (continued)		
Part Number	Description	Quantity
034530052AB	P/NIP 1/8X6-1/2 GALV.	1.000 EA
034530032BB	P/NIP 1/4X4" SCHED 40	1.000 EA
034630002AB	CPLG 1/4" PLATED	1.000 EA
415028008E	INPRO SEAL - 360	1.000 EA
034600001AA	BUSH 1/4TO1/8 BLACK	1.000 EA
034600001AA	BUSH 1/4TO1/8 BLACK	1.000 EA
085922080BD	C-FACE BRKT 360 085922069WCA	1.000 EA
032018012DK	HHCS 1/2-13X1-1/2 PLTD.	4.000 EA
032018024CK	HHCS 3/8-16X3 PLTD.	3.000 EA
412118006A	DRAIN	1.000 EA
423709011C	WASHER	3.000 EA
415028008E	INPRO SEAL - 360	1.000 EA
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 EA
076708000BB	C/B - 360	1.000 EA
415039016A	TERBD, 360-400	1.000 EA
076709000A	C/B - 360	1.000 EA
067053000B	GASK 320-400	1.000 EA
418150003A	GREASE FITTING CAP	1.000 EA
032018010CK	HHCS 3/8-16X1-1/4 PLTD.	4.000 EA
035000001A	ALFTG 1/8" 1610-BL	1.000 EA
415000103H	TERMINAL LUG	1.000 EA
033512008LB	HHTTS 1/4-20X1 PLATED	4.000 EA
406099000A	PLUG - FAN COVER 320-440	1.000 EA
034000014AB	WSH ID.406 OD.812 TH.065	4.000 EA

Product Information Packet: CEC84312T-4 - 50HP,1185RPM,3PH,60HZ,365TC,A36062M,TEFC


035000001A	ALFTG 1/8" 1610-BL	1.000 EA
418150003A	GREASE FITTING CAP	1.000 EA
MG1025N19	WILKO 778.50 BLUE GREEN - 55 GAL DRUMS	0.250 GA
033775004EA	DRSCR #6-1/4 304 S.S.	4.000 EA
034180034HA	KEY 5/8X5/8X4-1/4 L	1.000 EA
HW1000A32	5/16 FL WASHER WIDE,ID=.344,OD=1.125	3.000 EA
032509020C	CARRIAGE BOLT - 360	3.000 EA
LB1449	DIV-2/NEC WARNING LABEL	1.000 EA
14PA1000	PACKAGING 314 GROUP COMBINED PRINT	1.000 EA
032018005DL	1/2-13 X 5/8 SILICON BRONZE HHCS	1.000 EA

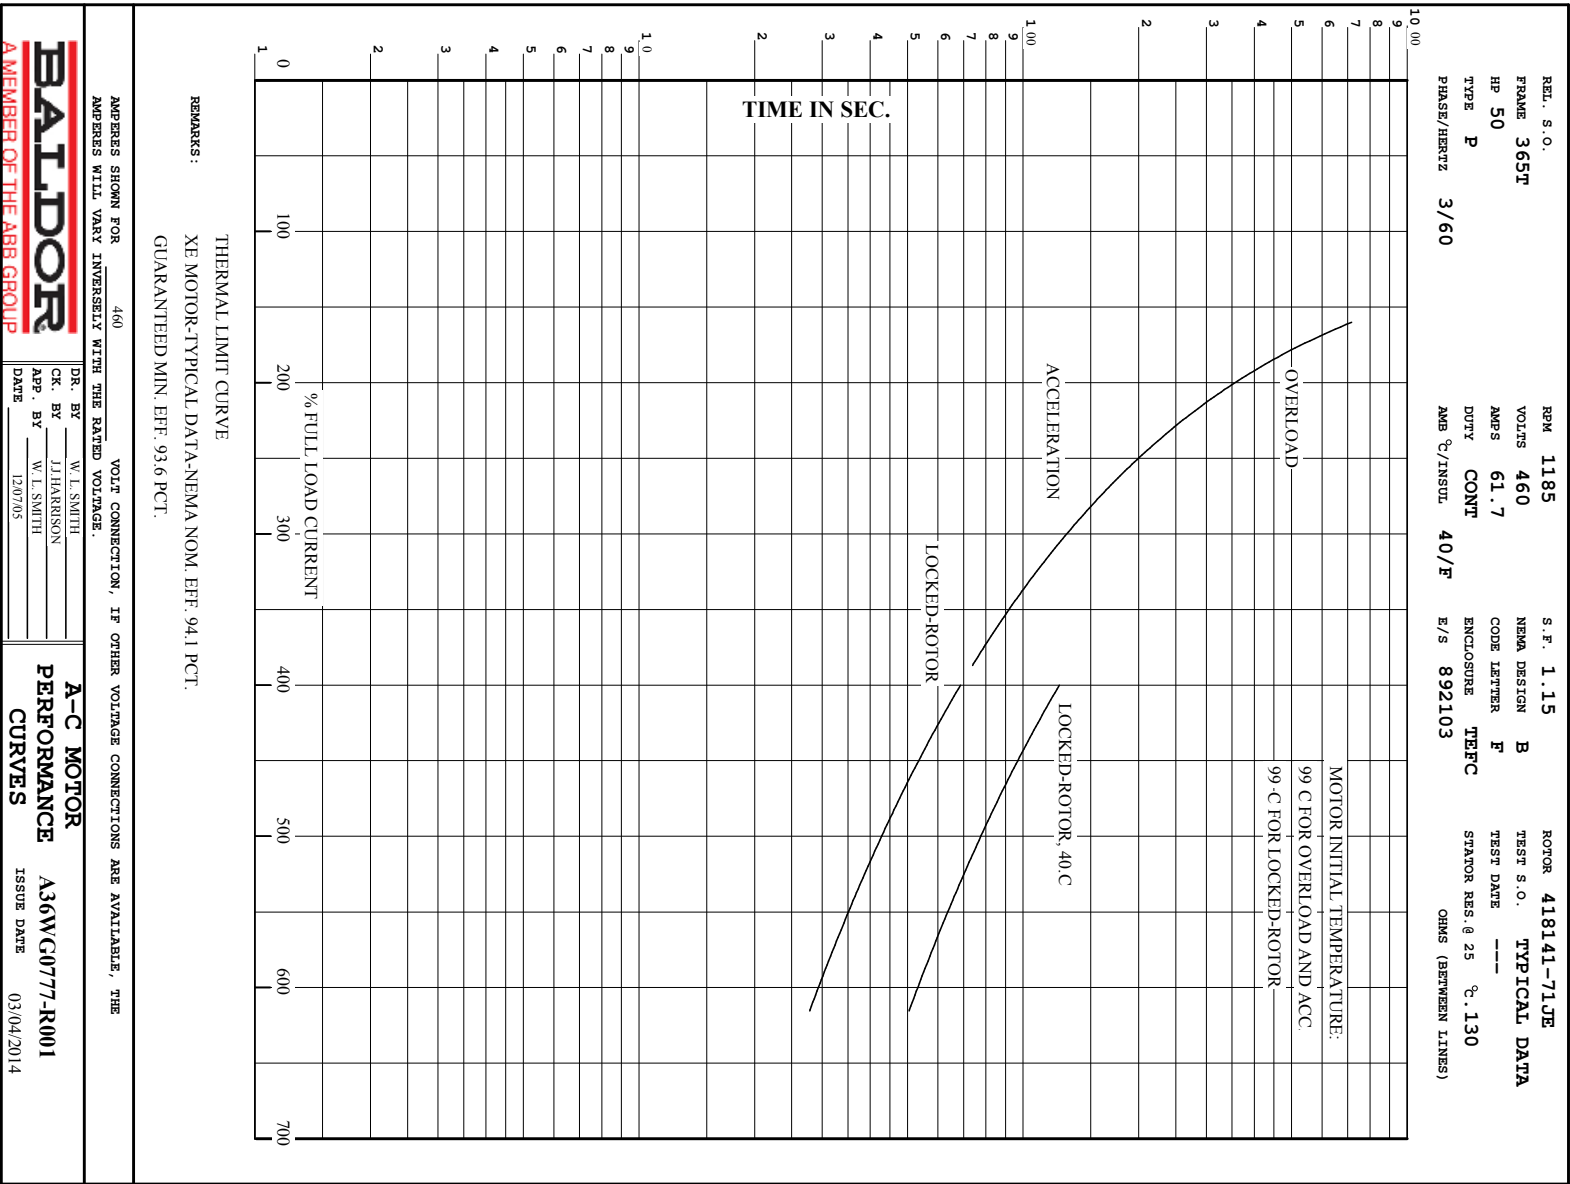

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	365T	50	P	3/60	1185	460
AMPS	DUTY	AMB ^{°C} / INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
61.7	CONT	40/F	1.15	B	F	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 ^{°C} OHMS (BETWEEN LINES)		
892103	418141-71JE	---	---	.130		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	POWER FACTOR	% EFFICIENCY	
NO LOAD	0	21.3	1200	5.08	0	
1/4	12.5	26.2	1197	49.4	90.8	
2/4	25.0	35.6	1193	70.0	93.9	
3/4	37.5	47.8	1190	77.8	94.4	
4/4	50.0	61.7	1186	80.6	94.2	
5/4	62.5	76.7	1182	81.5	93.6	
SPEED TORQUE						
	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	154	340	345		
PULL UP	650	133	295	305		
BREAKDOWN	1133	230	510	191		
FULL LOAD	1186	100	221	61.7		
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE REMARKS: TYPICAL DATA XE MOTOR-TYPICAL DATA-NEMA NOM. EFF. 94.1 PCT. GUARANTEED MIN. EFF. 93.6 PCT.						
BALDOR A MEMBER OF THE ABB GROUP		DR. BY <u>W. L. SMITH</u> CK. BY <u>J. J. HARRISON</u> APP. BY <u>W. L. SMITH</u> DATE <u>12/07/05</u>		A-C MOTOR PERFORMANCE DATA A36WG0777-R001 ISSUE DATE 03/04/20		

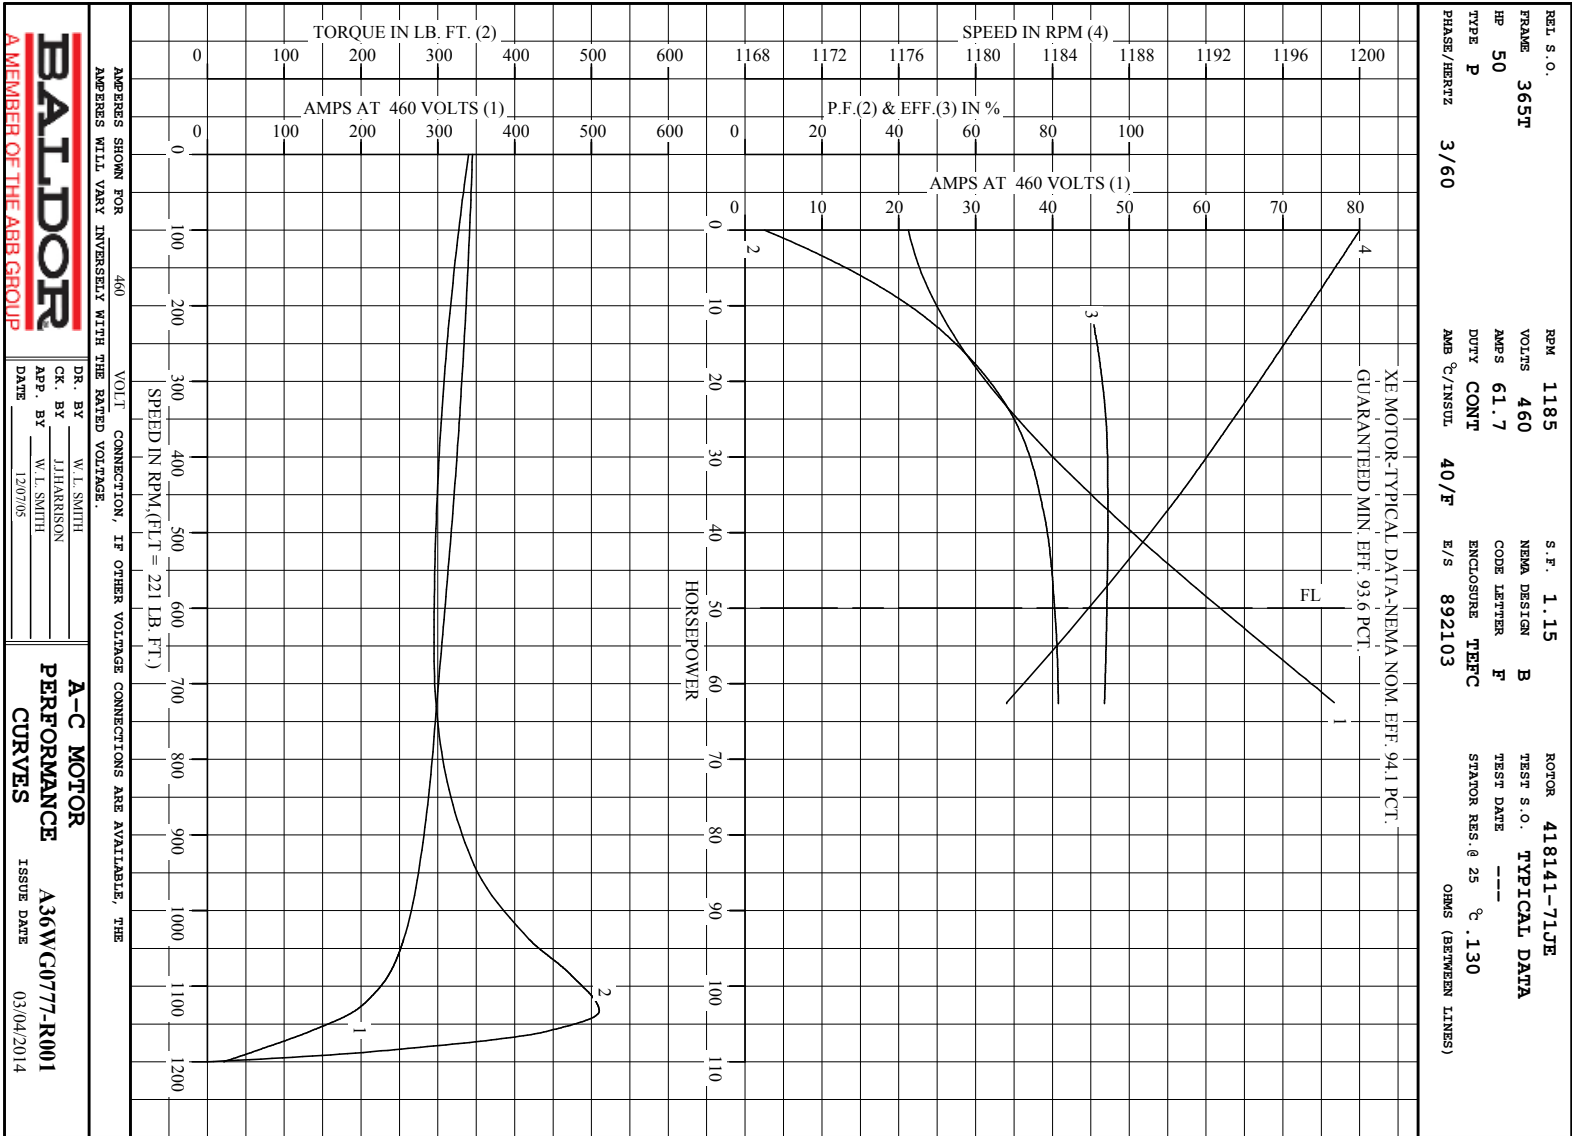

Printed on 3/4/14 7:40 @ fagsun

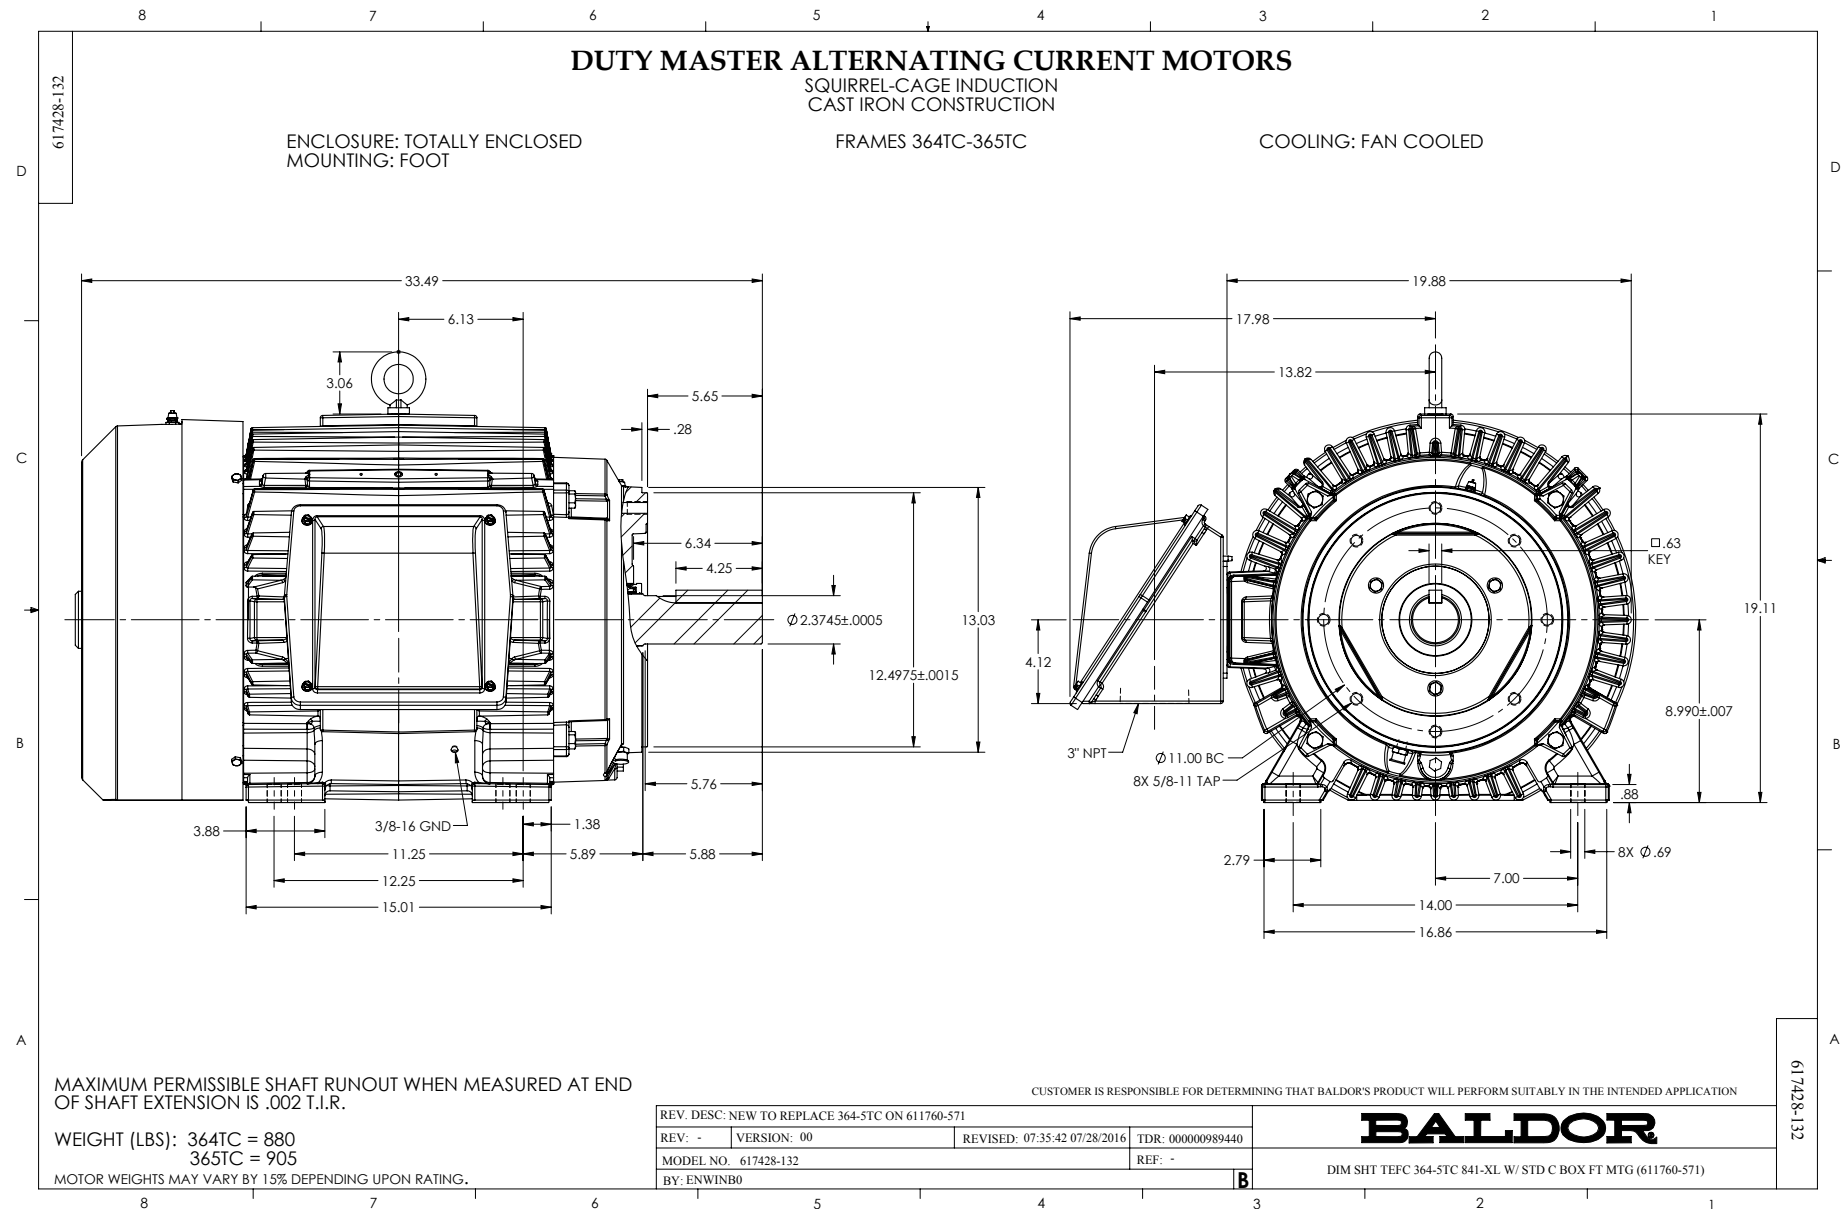


416820-036

A-C MOTOR

CONNECTION DIAGRAM

STANDARD 3 LEAD

CONNECTED

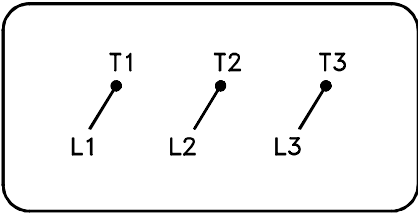

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225			BALDOR CONN DIAG - STANDARD 3 LEAD SH 1 of 1
REV. LTR: -	VERSION: 00	TDR: 000000538207	
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010	
MTL: -		BY: RAGRA	

Marketing maintained PDF of MN408:

<http://www.baldor.com/support/Literature/Load.ashx/MN408?ManNumber=MN408>

Marketing maintained PDF of MN416:

<http://www.baldor.com/support/Literature/Load.ashx/MN416?ManNumber=MN416>